



Milling Series

HY-PRO

Volume 3



INDEX



HYP-CR-HI-WEMS
4 Flutes - Variable lead type PAGE 4

HYP-CR-HD-WEMS
4 Flutes - Variable lead type PAGE 5

HYP-F1
1 Flute - Straight Shank PAGE 6


HYP-HI-(W)EMS
4 Flutes - Variable lead type PAGE 7

HYP-HP-WRESF
For general roughing PAGE 8

HYP-HS-CRE
4 Flutes - Corner radius PAGE 9



HYP-SB-EBD
2 Flutes - Center cutting PAGE 10

HYP-ZDS
2 Flutes - counterboring PAGE 11

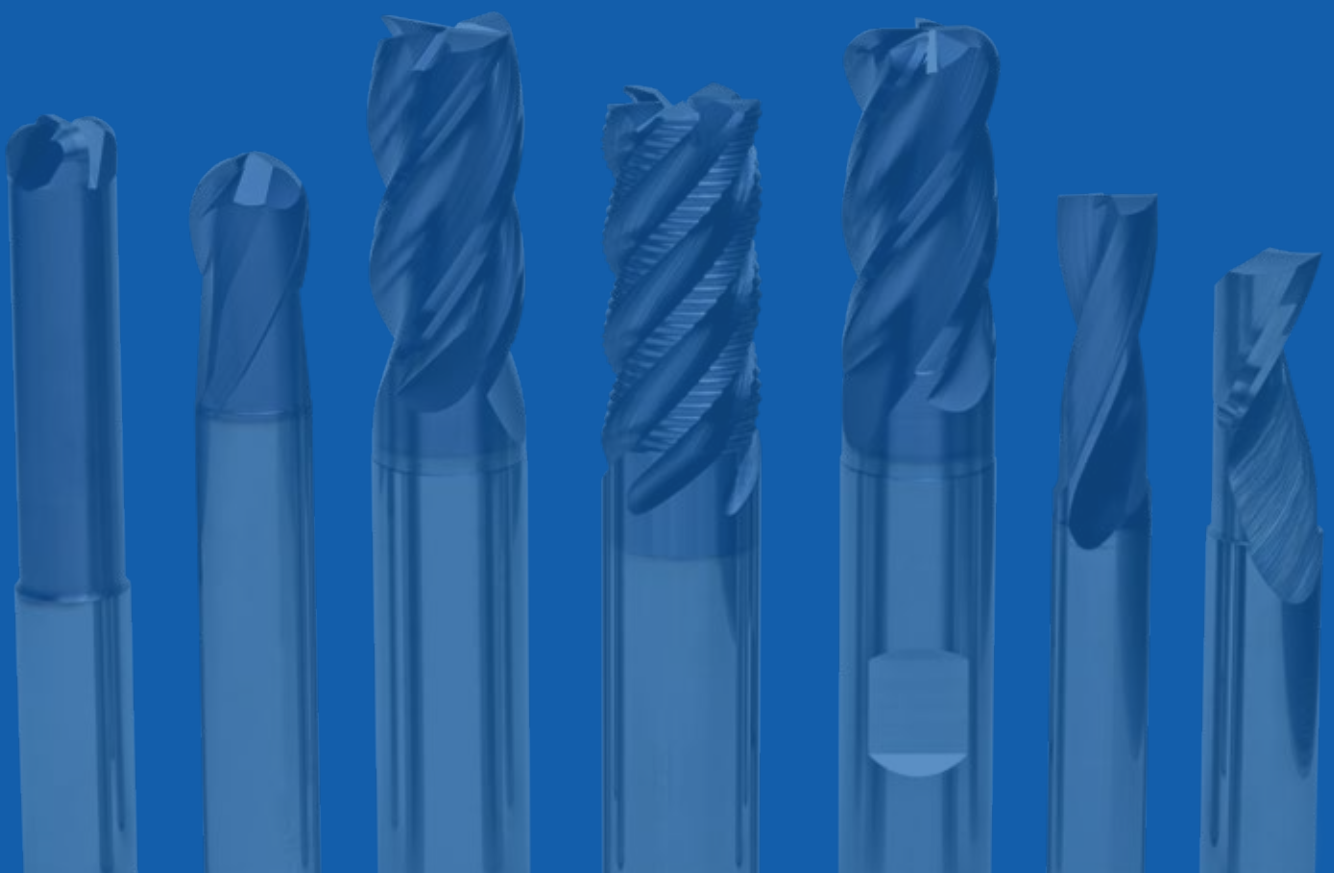

HYP-CR-HI-WEMS

Milling | Solid carbide



- Carbide end mill with TiAlN coating
- For general applications
- 4 flutes, variable helix and unequal spacing, corner radius
- Weldon shank





Milling | Solid carbide

EDP	ZEFP	DC	RE	LU	LF	APMX	DCON	DN
4832004011	4	4	0,5	-	57	11	6	-
4832005011	4	5	0,5	-	57	13	6	-
4832006011	4	6	0,5	20	57	13	6	5,8
4832006012	4	6	1	20	57	13	6	5,8
4832006013	4	6	1,5	20	57	13	6	5,8
4832006014	4	6	2	20	57	13	6	5,8
4832008011	4	8	0,5	25	63	19	8	7,8
4832008012	4	8	1	25	63	19	8	7,8
4832008013	4	8	1,5	25	63	19	8	7,8
4832008014	4	8	2	25	63	19	8	7,8
4832010011	4	10	0,5	30	72	22	10	9,8
4832010012	4	10	1	30	72	22	10	9,8
4832010013	4	10	1,5	30	72	22	10	9,8
4832010014	4	10	2	30	72	22	10	9,8
4832010016	4	10	3	30	72	22	10	9,8
4832012011	4	12	0,5	38	83	26	12	11,8
4832012012	4	12	1	38	83	26	12	11,8
4832012013	4	12	1,5	38	83	26	12	11,8
4832012014	4	12	2	38	83	26	12	11,8
4832012016	4	12	3	38	83	26	12	11,8
4832016011	4	16	0,5	44	92	32	16	15,8
4832016012	4	16	1	44	92	32	16	15,8
4832016014	4	16	2	44	92	32	16	15,8
4832016016	4	16	3	44	92	32	16	15,8
4832016018	4	16	4	44	92	32	16	15,8
4832020012	4	20	1	54	104	38	20	19,8
4832020014	4	20	2	54	104	38	20	19,8
4832020016	4	20	3	54	104	38	20	19,8
4832020018	4	20	4	54	104	38	20	19,8
4832020020	4	20	5	54	104	38	20	19,8

HYP-SB-EBD

Milling | Solid carbide



- Carbide end mill with TiAlN coating
- For general applications
- 2 flutes, ball nose

P	P	M	K	N	S	H
~45 HRC	~55 HRC	~35 HRC	~350 HB			~60 HRC

	CARBIDE	TiAlN	30°	SHRINK FIT		± 0.01
--	----------------	--------------	------------	-------------------	--	------------



EDP	ZEFP	DC	RE	LU	LF	APMX	DCON
48350030	2	3	1,5	9	57	4	6
48350040	2	4	2	12	57	5	6
48350050	2	5	2,5	15	57	6	6
48350060	2	6	3	18	57	7	6
48350080	2	8	4	20	63	9	8
48350100	2	10	5	25	72	11	10
48351200	2	12	6	25	83	13	12

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

HYP-CR-HI-WEMS / HYP-CR-HD-WEMS

High speed contouring

Low Carbon - Alloy - Tool Steel			GG-GGG-GTW			Stainless steel			Aluminium - Mg			Ti Alloys									
HB/HRC	HB 150-250			HB 20-30			HRC 30-40			>HB 180			HRC 20			HRC 40-50					
N/mm ²	500~800 N/mm ²			800~1000 N/mm ²			1000~1300 N/mm ²			Non - Alloyed			400~700 N/mm ²			Non-alloyed					
Vc	160 m/min			120 m/min			100 m/min			140 m/min			50 m/min			180 m/min			65 m/min		
Ø	Fz	S=n	F=Vf	Fz	S=n	F=Vf	Fz	S=n	F=Vf	Fz	S=n	F=Vf	Fz	S=n	F=Vf	Fz	S=n	F=Vf	Fz	S=n	F=Vf
4	0,035	12.730	1.790	0,03	9.550	1.150	0,03	7.960	960	0,035	11.150	1.570	0,03	3.980	480	0,035	14.330	2.010	0,025	5.180	520
6	0,04	8.490	1.360	0,035	6.370	900	0,035	5.310	750	0,04	7.430	1.190	0,035	2.660	380	0,04	9.550	1.530	0,027	3.450	380
8	0,07	6.370	1.790	0,065	4.780	1.250	0,065	3.980	1040	0,7	5.580	1.570	0,065	1.990	520	0,07	7.170	2.010	0,031	2.590	330
10	0,1	5.090	2.040	0,08	3.820	1.230	0,08	3.190	1030	0,1	4.460	1.790	0,08	1.600	520	0,1	5.730	2.300	0,038	2.070	320
12	0,12	4.240	2.040	0,1	3.190	1.280	0,1	2.660	1070	0,12	3.720	1.790	0,1	1.330	540	0,12	4.780	2.300	0,045	1.730	320
16	0,13	3.180	1.660	0,12	2.390	1.150	0,12	1.990	960	0,13	2.790	1.460	0,12	1.000	480	0,13	3.590	1.870	0,052	1.300	280
20	0,15	2.550	1.530	0,12	1.910	920	0,12	1.600	770	0,15	2.230	1.340	0,12	800	390	0,15	2.870	1.730	0,059	1.040	250

ap x d	F(z) correction	ae = 1xd		ae = 0,5xd		ae = 0,2xd	
		ap	Fakt.	ap	Fakt.	ap	Fakt.
ap x d	F(z)	0,5	1,0	0,5	1,2	0,5	1,3
		1,0	0,7	1,0	1,0	1,0	1,2
		1,5	0,5	1,5	0,7	1,5	1,0
		2,0	0,3	2,0	0,5	2,0	0,8

The above stated application data are as per RED marked parameters.

HYP-F1

Slotting

Ø	AL		Plastic	
	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
3	40.000	2.500	20.000	2.000
4	35.000	2.500	20.000	2.000
5	30.000	3.000	20.000	3.000
6	25.000	3.000	20.000	3.000
8	25.000	3.000	20.000	3.000
10	22.300	3.000	16.000	2.400
12	18.600	3.000	13.500	2.400

HYP-HI-EMS / HYP-HI-WEMS

Side milling (Contour line finish)

Low Carbon - Alloy - Tool Steel			GG-GGG-GTW			Stainless steel			Aluminium - Mg			Ti Alloys									
HB 150-250	HB 20-30	HRC 30-40	>HB 180	HRC 20	Aluminium - Mg	Ti Alloys	Non - Alloyed			HRC 40-50											
500~800 N/mm ²	800~1000 N/mm ²	1000~1300 N/mm ²	Non - Alloyed	400~700 N/mm ²	Non - Alloyed	HRC 40-50															
Vc	160 (m/min)			120 (m/min)			100 (m/min)			140 (m/min)			50 (m/min)			180 (m/min)			65 (m/min)		
Ø	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)	Fz (mm)	S (min ⁻¹)	F (mm/min)
4	0,035	12.730	1.790	0,03	9.550	1.150	0,03	7.960	960	0,035	11.150	1.570	0,03	3.980	480	0,035	14.330	2.010	0,025	5.180	520
6	0,04	8.490	1.360	0,035	6.370	900	0,035	5.310	750	0,04	7.430	1.190	0,035	2.660	380	0,04	9.550	1.530	0,027	3.450	380
8	0,07	6.370	1.790	0,065	4.780	1.250	0,065	3.980	1040	0,7	5.580	1.570	0,065	1.990	520	0,07	7.170	2.010	0,031	2.590	330
10	0,1	5.090	2.040	0,08	3.820	1.230	0,08	3.190	1030	0,1	4.460	1.790	0,08	1.600	520	0,1	5.730	2.300	0,038	2.070	320
12	0,12	4.240	2.040	0,1	3.190	1.280	0,1	2.660	1070	0,12	3.720	1.790	0,1	1.330	540	0,12	4.780	2.300	0,045	1.730	320
16	0,13	3.180	1.660	0,12	2.390	1.150	0,12	1.990	960	0,13	2.790	1.460	0,12	1.000	480	0,13	3.590	1.870	0,052	1.300	280
20	0,15	2.550	1.530	0,12	1.910	920	0,12	1.600	770	0,15	2.230	1.340	0,12	800	390	0,15	2.870	1.730	0,059	1.040	250

ap x d	F(z) correction	ae = 1xd		ae = 0,5xd		ae = 0,2xd	
		ap	Fakt.	ap	Fakt.	ap	Fakt.
ap x d	F(z)	0,5	1,0	0,5	0,7	0,5	1,3
		1,0	0,7	1,0	1,0	1,0	1,2
		1,5	0,5	1,5	0,7	1,5	1,0
		2,0	0,3	2,0	0,5	2,0	0,8

The above stated application data are as per RED marked parameters.

Milling | Endmills

Cutting conditions

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

HYP-HP-WRESF

Side milling

Ø	GG GG-GGG		C≤0,2% S55C • SS400 ~750 N/mm ²		~30 HRC SKD • SKS • SNCM		30~38 HRC NAK55 • HPMI • SKT		38~45 HRC - SUS SUS304 • X210CR12 • X40CRMV51	
	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
6	4.200	585	4.200	585	3.700	370	2.900	230	2.650	210
8	3.150	565	3.150	565	2.750	350	2.150	230	1.950	210
10	2.500	500	2.500	500	2.200	350	1.750	230	1.550	210
12	2.100	500	2.100	500	1.850	330	1.450	230	1.300	210
16	1.550	400	1.550	400	1.350	320	1.050	230	995	210
20	1.250	375	1.250	375	1.100	320	875	240	795	220


Slotting

Ø	GG GG-GGG		C≤0,2% S55C • SS400 ~750 N/mm ²		~30 HRC SKD • SKS • SNCM		30~38 HRC NAK55 • HPMI • SKT		38~45 HRC - SUS SUS304 • X210CR12 • X40CRMV51	
	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
6	3.150	315	3.150	315	2.650	265	2.300	180	2.100	165
8	2.350	300	2.350	300	1.950	250	1.750	175	1.550	155
10	1.900	300	1.900	300	1.550	245	1.400	165	1.250	150
12	1.550	280	1.550	280	1.300	235	1.150	160	1.050	145
16	1.150	280	1.150	280	995	235	875	140	795	125
20	955	280	955	280	795	235	700	140	635	125
25	700	245	700	245	640	225	510	125	460	115

HYP-HS-CRE

High speed side milling

Ø	GG		30~38 HRC SKT • SKD • NAK55 • HPM1		38~45 HRC - SUS SUS30 • SKD • NAK80 • HPM50		45~55 HRC		55~60 HRC	
	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
6 X R 1,5	5.300	6.300	4.250	4.600	3.700	4.000	2.650	2.600	1.600	1.050
8 X R 2	4.000	6.300	3.200	4.600	2.800	4.000	2.000	2.600	1.200	1.050
10 X R 2	3.200	6.300	2.550	4.600	2.250	4.000	1.600	2.600	955	1.050
12 X R 3	2.650	6.300	2.100	4.600	1.850	4.000	1.350	2.600	795	1.050

Max cutting depth		ap	ae	
		0,1xR	0,3D	
		R	ap	ae
		≤2	0,1xR	0,3D
		>2	0,2mm	0,3D
		R	ap	ae
		≤2	0,05xR	0,3D
		>2	0,1mm	0,3D

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

HYP-SB-EBD

Centre cutting


Vc		Cu					30~35 HRC					35~42 HRC					42~55 HRC				
		300 (m/min)					280 (m/min)					260 (m/min)					240 (m/min)				
Ø	Z	fz (mm)	ap (mm)	ae (mm)	n (min ⁻¹)	F (mm/min)	fz (mm)	ap (mm)	ae (mm)	n (min ⁻¹)	F (mm/min)	fz (mm)	ap (mm)	ae (mm)	n (min ⁻¹)	F (mm/min)	fz (mm)	ap (mm)	ae (mm)	n (min ⁻¹)	F (mm/min)
3	2	0,045	0,15	0,6	31.847	2866	0,045	0,15	0,6	29.724	2675	0,045	0,15	0,6	27.601	2484	0,045	0,15	0,6	25.478	2293
4	2	0,06	0,2	0,8	23.885	2866	0,06	0,2	0,8	22.293	2675	0,06	0,2	0,8	20.701	2484	0,06	0,2	0,8	19.108	2293
5	2	0,075	0,25	1	19.108	2866	0,075	0,25	1	17.834	2675	0,075	0,25	1	16.561	2484	0,075	0,25	1	15.287	2293
6	2	0,09	0,3	1,2	15.924	2866	0,09	0,3	1,2	14.862	2675	0,09	0,3	1,2	13.800	2484	0,09	0,3	1,2	12.739	2293
8	2	0,12	0,4	1,6	11.943	2866	0,12	0,4	1,6	11.146	2675	0,12	0,4	1,6	10.350	2484	0,12	0,4	1,6	9.554	2293
10	2	0,15	0,5	2	9.554	2866	0,15	0,5	2	8.917	2675	0,15	0,5	2	8.280	2484	0,15	0,5	2	7.643	2293
12	2	0,18	0,6	2,4	7.962	2866	0,18	0,6	2,4	7.431	2675	0,18	0,6	2,4	6.900	2484	0,18	0,6	2,4	6.369	2293

HYP-ZDS

Counterboring

Vc	C≤0,2% - GG S55C • SS400 • GG25 ~750 N/mm ²		~30 HRC SCM • SKS • SKT • SKD		30~38 HRC NAK55 • HPMI • SKT • SKD		38~45 HRC SUS SUS304 • SKD		Aluminium Alloy A7075		Aluminium Alloy Casting <Si 13%	
	60~80 (m/min)		40~60 (m/min)		30~50 (m/min)		20~40 (m/min)		80~200 (m/min)		40~150 (m/min)	
Ø	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
4	5.950	360	4.950	295	4.000	240	3.200	155	12.500	915	9.550	575
5	4.800	360	3.950	295	3.200	240	2.550	155	10.000	915	7.650	575
6	4.000	360	3.300	295	2.700	240	2.150	155	8.400	915	6.400	575
7	3.400	360	2.800	295	2.300	240	1.850	155	7.200	915	5.500	575
8	3.000	360	2.450	295	2.000	240	1.600	155	6.350	915	4.750	575
9	2.650	360	2.200	295	1.800	240	1.450	155	5.600	915	4.200	575
10	2.400	360	2.000	295	1.600	240	1.300	155	5.000	915	3.800	575

Max cutting depth





www.osgeurope.com





shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
Fax: +32 10 23 05 51
info@osgeurope.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
Fax: +32 10 23 05 31
info@osg-belgium.com

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
Fax: +33 1 49 90 10 15
sales@osg-france.com

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
Fax: +31 348 44 2144
info@osg-nl.com

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton, United Kingdom.
Tel: +44 1827 720 013
uk_sales@osg-uk.com

CZECH, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia organizacna zlozka
Racianská 22/A, SK-83102 Bratislava
Slovakia
Tel. +421 24 32 91 295
Orders-osgsvk@osgeurope.com

OSG POLAND Sp. z.o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
Fax: +22 760 82 71
osg@osg-poland.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
Fax: +45 46 75 67 00
osg@osg-scandinavia.com

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö - Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

OSG IBERICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
Fax: +34 945 228 883
osg.iberica@osg-ib.com

RUSSIA

Butlerova street, 17B, office 5069
117342 Moscow - Russia
Tel: +7 (495) 150 41 54
info@osg-russia.com

OSG TURKEY

Rami Kişla Cad.No:56 Eyüp
Istanbul 34056 - Turkey
Tel:+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

ROMSAN INTERNATIONAL CO. SRL

Reprezentant Exclusiv OSG
25C, Bucuresti-Magurele Street
051431 Bucuresti - România
Tel: +40 21 322 07 47
Fax: +40 21 321 56 00
romsan.int@romsan.ro

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
Fax: + 49 7161 6064-444
info@osg-germany.de

OSG ITALIA

Via Ferrero, 65 A/B3
I - 10098 Rivoli - Italy
Tel: +39 0117705211
Fax: +39 0117705215
info@osg-italia.it

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
T +41 44 802 15 15
F +41 44 802 15 95
info@vb-tools.com

OSG EUROPE LOGISTICS S.A.

04/2018 - All rights reserved. © OSG Europe 2018.

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com

