



Thread milling cutters series

THREAD MILLS

Volume 4



KEY FEATURES: AT-1

1 Unequal spacing with variable lead flute reduces vibration

2 Right-hand cut & left-hand helix geometry prevents bending

3 EgiAs coating with exceptional wear resistance and toughness


4 Ultra-Fine Grain Carbide with high wear resistance and toughness



AT-1: THE SECRET TO 1-PASS CUTTING

The secret to 1-pass cutting

Evolution from conventional 2-pass cutting to 1-pass cutting by preventing bending, reducing cutting time.

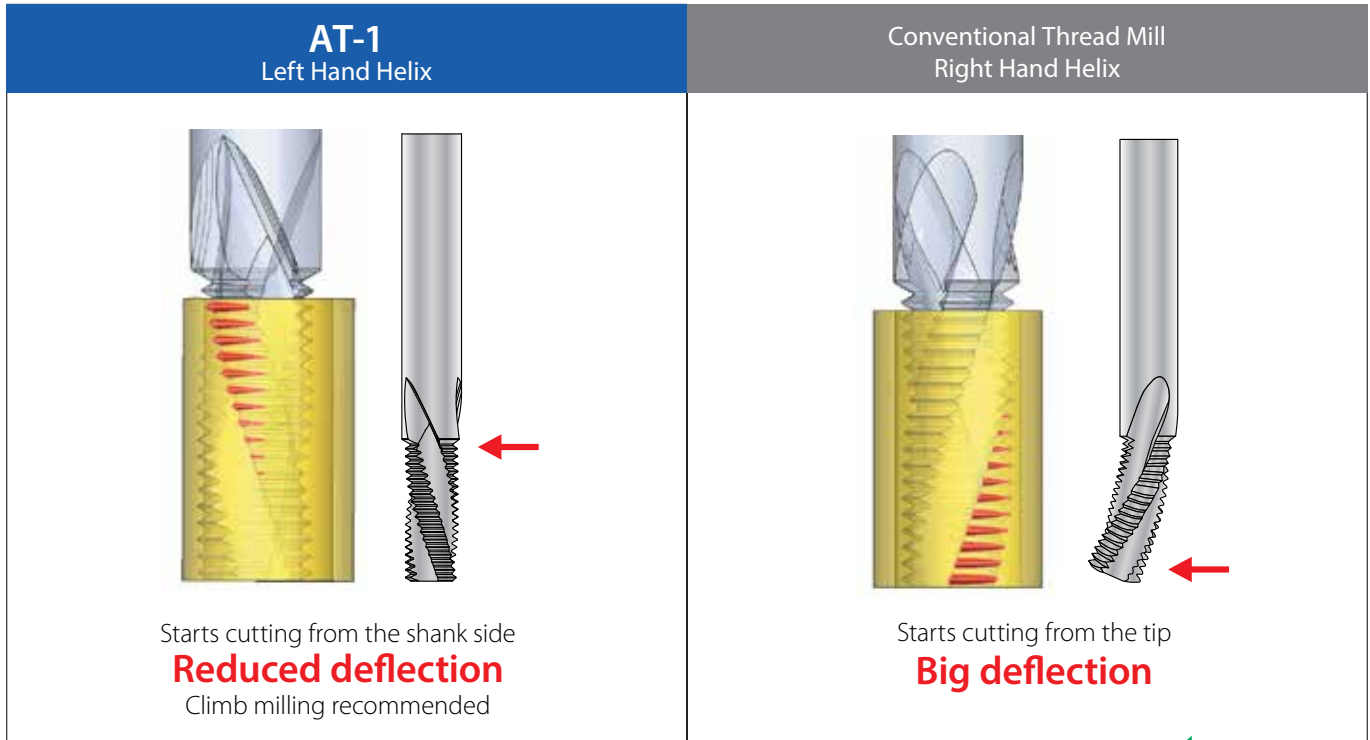

High quality internal threading




Size	Ø19,7 x 54 P3 6F
Work Material	SUS304
Cutting Speed	40 m/min (646min ⁻¹)
Feed	14 mm/min (0,02mm/t)
Internal Thread Size	M24 x 3
Tapping length	45 mm
Coolant	Water-Soluble
Machine	Horizontal Machining Center

AT-1


Threading | Thread milling | Metric



Type 1

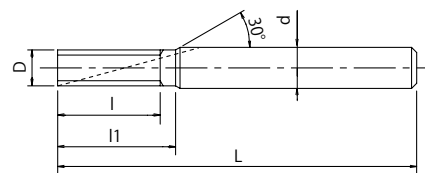

Type 2

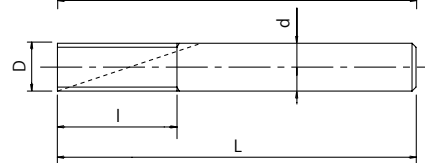

- First choice in quality and performance
- One pass thread mill
- EgiAs coating
- Milling for internal thread

P C: ≤0,2%	P C: 0,25-0,4%	P C: ≥0,45%	P SCM	M INOX	K GG	K GGG	N Al	N AC,ADC	H 25-35 HRC	H 35-45 HRC	m/min
80-160	80-160	80-160	60-120	60-120	80-160	60-120	80-160	100-300	80-200	80-200	



EDP	M	P	D	L	l	l1	d	Z	Type	Price
8331000	6	0,75	4,5	75	13,5	16	6	4	1	
8331001	6	1	4,5	75	14	16	6	4	1	
8331002	8	0,5	5,7	75	17	-	6	4	2	
8331003	8	1	5,7	75	18	-	6	4	2	
8331004	8	1,25	5,7	75	18,75	-	6	4	2	
8331005	10	1	7,7	85	22	-	8	4	2	
8331006	10	1,25	7,7	85	22,5	-	8	4	2	
8331007	10	1,5	7,7	85	24	-	8	4	2	
8331008	12	1	9,7	100	26	-	10	5	2	
8331009	12	1,25	9,7	100	27,5	-	10	5	2	
8331010	12	1,5	9,7	100	27	-	10	5	2	
8331011	12	1,75	9,7	100	28	-	10	5	2	
8331012	14	0,5	11,7	120	29	-	12	5	2	
8331013	14	0,75	11,7	120	30	-	12	5	2	
8331014	14	1	11,7	120	30	-	12	5	2	
8331015	14	1,5	10,7	120	31,5	34,5	12	5	1	
8331016	14	2	9,7	100	32	-	10	5	2	
8331017	16	1	13,7	135	34	39	16	5	1	
8331018	16	1,5	13,7	135	36	39	16	5	1	
8331019	16	2	11,7	120	36	-	12	5	2	
8331020	18	2,5	11,7	120	42,5	-	12	5	2	
8331021	20	1,5	15,7	135	43,5	-	16	5	2	
8331022	20	2,5	13,7	135	45	50	16	5	1	
8331023	24	1,5	19,7	150	51	-	20	6	2	
8331024	24	2	19,7	150	52	-	20	6	2	
8331025	24	3	19,7	150	54	-	20	6	2	

Threading | Thread milling

Metric

CUTTING DATA

Effects of left-hand helix


Comparison of differences in internal thread pitch diameter at initial cutting stage.

Size	Ø7,7 × 22 P1 4F
Work Material	SCM440 (30 HRC)
Cutting Speed	100 m/min (4.136min ⁻¹)
Feed	380 mm/min (0,1mm/t)
Internal Thread Size	M10 x 1 mm
Drill Hole Size	Ø9 × 18 mm (Through)
Threading Length	15 mm
Machining Method	Climb milling 1-Pass
Coolant	Water-Soluble
Machine	Vertical Machining Center

The left-hand helix's small pitch diameter difference between the hole entry and inner hole allows a delay in gauge-out failure. Moreover, longer tool life can be achieved with "zero cutting" for correcting bending being eliminated.

	Hole Entry	Inner Hole Area	Dia. Difference
Right Hand Helix	+0,120 ~ +0,140	+0,040 ~ +0,060	0,060 ~ 0,100
Left Hand Helix	+0,120 ~ +0,140	+0,120 ~ +0,140	0 ~ +0,020



Pitch diameter measurement method : Step gauge

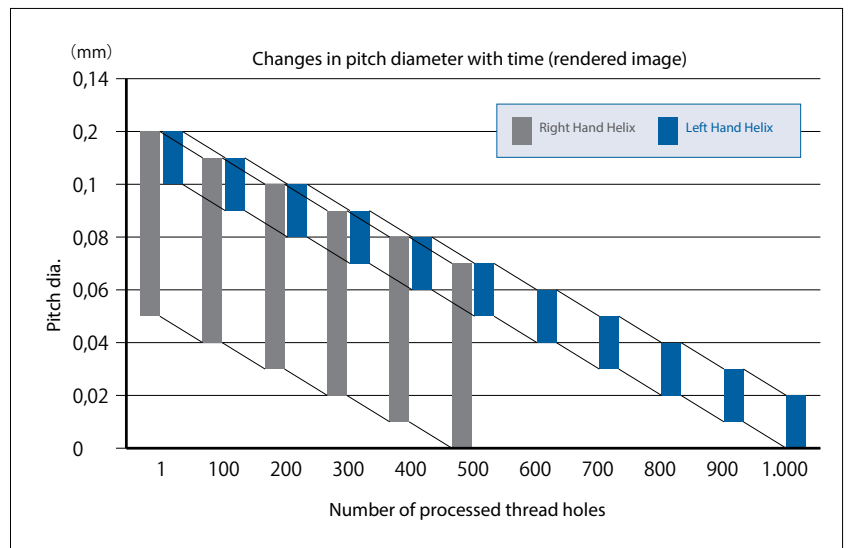

Effects of EgiAs coating

Cutting edge after threading 2.000 holes.

Size	Ø7,7 × 22 P1 4F
Work Material	SCM440 (30 HRC)
Cutting Speed	100 m/min (4.136min ⁻¹)
Feed	380 mm/min (0,1mm/t)
Internal Thread Size	M10 x 1 mm
Drill Hole Size	Ø9 × 18 mm (Through)
Threading Length	15 mm
Coolant	Water-Soluble
Machine	Vertical Machining Center

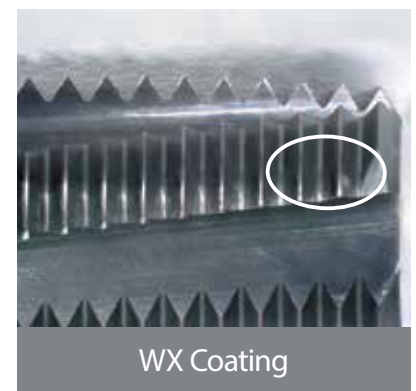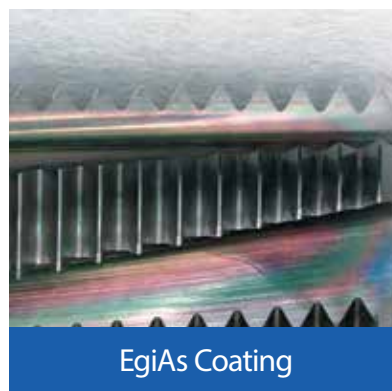

CUTTING DATA


Work materials ① to ② are machined under the conditions shown below.

Internal Thread Size	M10 x 1 mm
Drill Hole Size	Ø9 x 25 mm (Blind)
Threading Length	19 mm
Coolant	Water-Soluble
Machine	Vertical Machining Center

- Internal thread pitch diameter difference between hole entry and inner hole area: 20µm or less
Eg: +0.080 step gauge passes completely, +0.100 step gauge stops less than or equal to one revolution.
- Fastest cutting condition (including number of passes) while fulfilling the requirement of Condition 1.


① Machining SUS304

Tool	AT-1 Ø7,7x22 P1 4F	Competitor
Cutting Speed	120m/min (4.961min ⁻¹)	140m/min (5.122min ⁻¹)
Feed	228mm/min (0,05mm/t)	200mm/min (0,1mm/t)
Number of Passes	1-Pass	2-Passes
Cutting Time	2,26 sec	3,03 sec

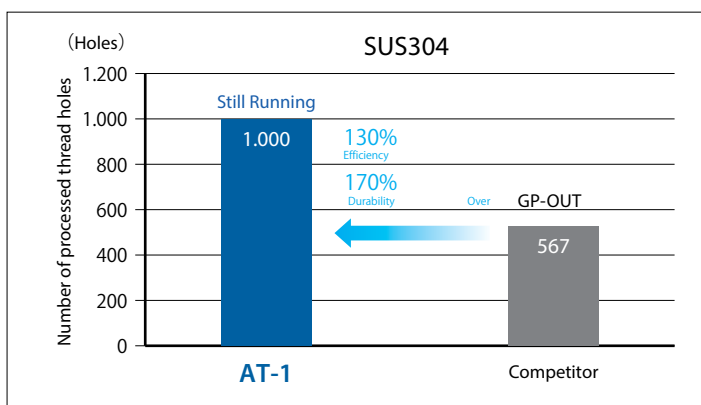


② Machining S50C

Tool	AT-1 Ø7,7x22 P1 4F	Competitor
Cutting Speed	160m/min (6.614min ⁻¹)	140m/min (5.122min ⁻¹)
Feed	122mm/min (0,02mm/t)	200mm/min (0,1mm/t)
Number of Passes	1-Pass	3-Passes
Cutting Time	4,28 sec	45,4 sec

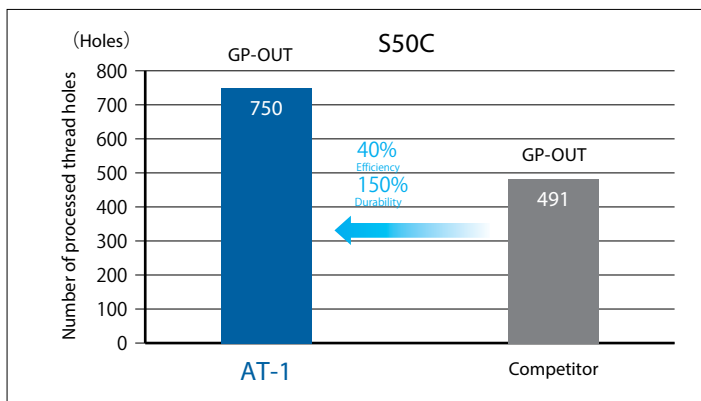

③ Machining SCM440

Tool	AT-1 Ø7,7x22 P1 4F	Competitor
Cutting Speed	80m/min (3.307min ⁻¹)	140m/min (5.122min ⁻¹)
Feed	30mm/min (0,01mm/t)	200mm/min (0,1mm/t)
Number of Passes	1-Pass	4-Passes
Cutting Time	17,12 sec	60,54 sec


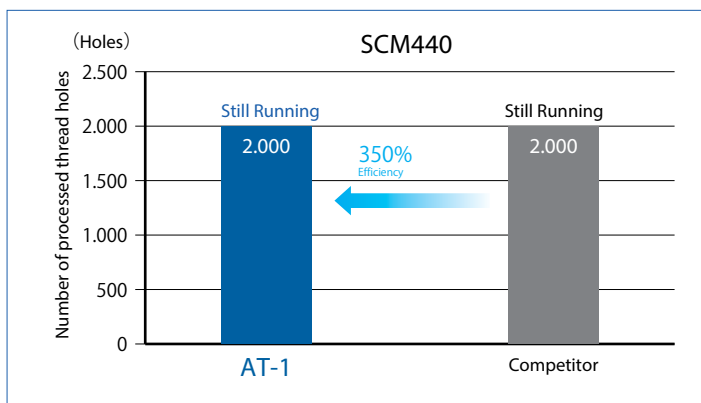


SUS304 durability test result

Tool	AT-1 Ø9,7×27 P1,5 5F	WX-ST-PNC Ø9,5×22,5 P1,5
Work Material	SUS304	
Cutting Speed	100m/min (3.283min ⁻¹)	120m/min (4.021min ⁻¹)
Feed	12,5mm/min (0,01mm/t)	42mm/min (0,01mm/t)
Internal Thread Size	M12 x 1,5	
Drill Hole Size	Ø10,5 × 25 mm (Through)	
Threading Length	22,5 mm	
Coolant	Water-Soluble	
Machine	Vertical Machining Center	
Number of Passes	1-Pass	2-Passes

Threading | Thread milling


Cutting Data

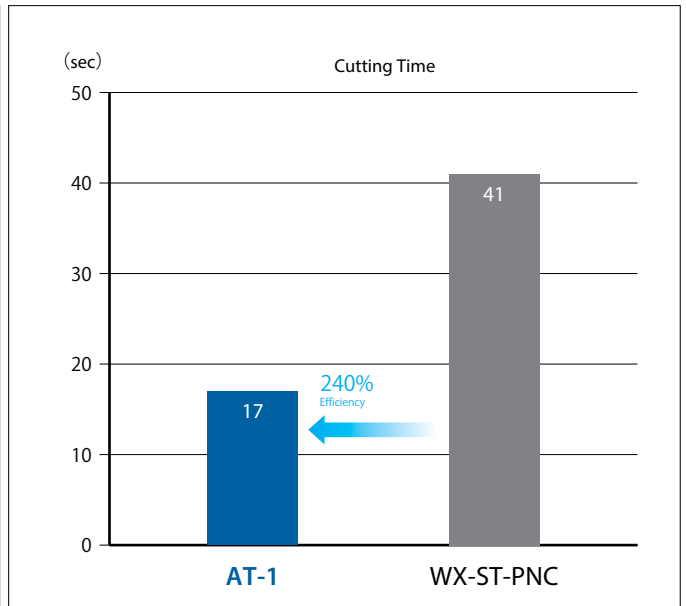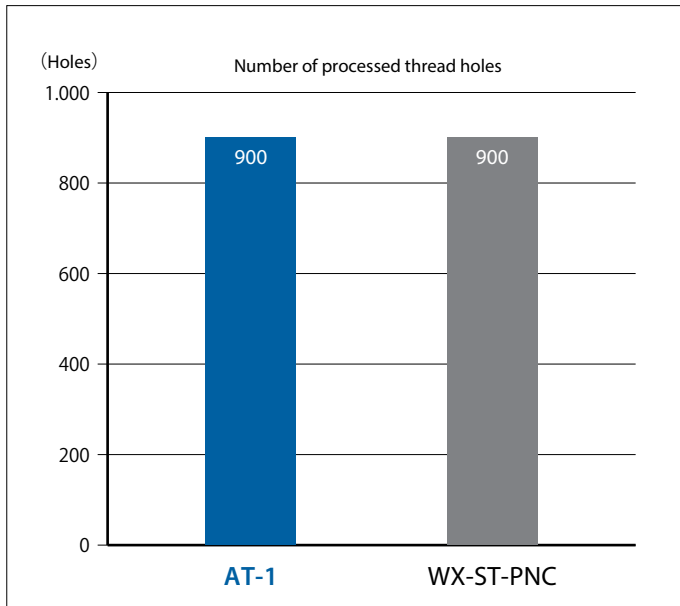

Q&A FAQ ABOUT THREAD MILLING

Why internal thread cutting tools cannot be used to cut external threads?

Metric and unified threads have different thread profiles between internal and external threads. For these threads, internal thread cutting tools cannot be used to cut external threads because in their basic thread profiles, the crest and root shapes are not uniform. However, for pipe threads, which have uniform crests and roots, thread cutting tools can be shared for internal and external thread cutting.

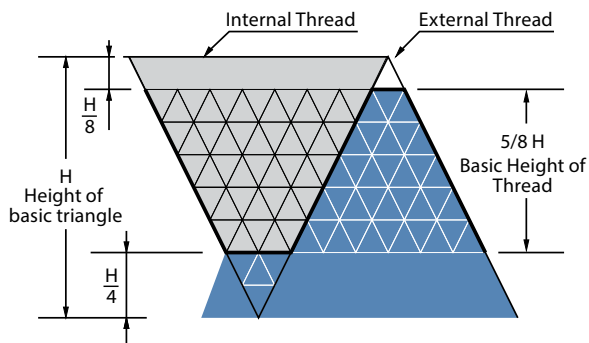

Compare the shapes of internal and external threads.


?	1/8 H	1/4 H
Height cut off from crest:	External Thread	Internal Thread
?	1/4 H	1/8 H
Height cut off at root:	External Thread	Internal Thread

Both threads have the same basic height of thread (5/8H). However, their shapes are different from each other.

Example of basic thread profile (metric thread)

What does the number "75" under "Fit %" mean, which is displayed on the data entry screen of ThreadPro?

It means to aim at the acceptable range of threads. Default values are 75% (larger side) for internal threads and 25% (smaller side) for external threads in light of their engagement. You can change these to your desired values.

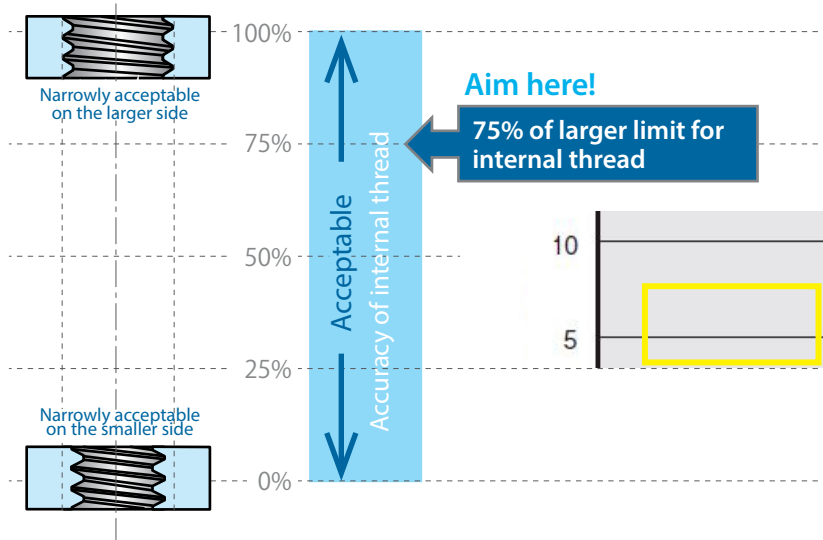

Is ThreadPro compatible with NC programs developed for custom-made thread mills ?


Yes, please consult our sales representatives.

KEY FEATURES: WH-EM-PNC



WH-EM-PNC NEW

Threading | Thread milling | Metric

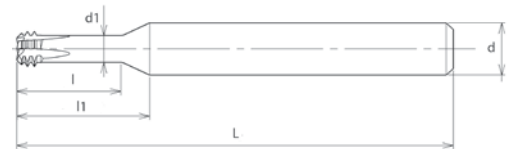

- Thread milling without pre-drilled hole
- WXS coating
- Left-hand (spindle rotation left)
- Direction of tool feed: right
- 4 flutes, strong & negative rake angle

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ● 25-45 HRC	H ● 45-55 HRC	
40-100	40-100	40-100	40-100	40-100	40-120	40-100	40-100	40-160	40-80	40-80	40-100	30-80	m/min
0,01~0,03	0,01~0,03	0,01~0,03	0,01~0,03	0,01~0,03	0,01~0,1	0,01~0,05	0,01~0,05	0,01~0,1	0,01~0,03	0,01~0,03	0,01~0,03	0,01~0,03	mm/t



EDP	M	P	L	l	l1	d1	d	Z	Price
T1606081	3	0,5	50	7,5	12,3	1,70	6	4	
T1606082	4	0,7	50	9,9	14,2	2,18	6	4	
T1606083	5	0,8	50	12	15,5	2,97	6	4	
T1606084	6	1	50	14,5	17,5	3,36	6	4	
T1606085	8	1,25	70	19,2	24,1	4,66	10	4	
T1606086	10	1,5	70	23,7	27,7	5,78	10	4	
T1606087	12	1,75	80	28,4	31,4	6,92	10	4	

CUTTING DATA


Tool	WH-EM-PNC M4
Work Material	1.2379 (Cold work tool steel) 60HRC
Cutting speed	30 m/min (3.082 min ⁻¹)
Feed	123 mm/min (0.01 mm/t)
Depth of cut	8 mm
Coolant	Airblow
Machine	Exeron HSC600
Interface	HSK-40
Holder	Shrink holder
Hole type	Blind hole

Tool	WH-EM-PNC M4
Work Material	1.6582 (Alloy engineering steel) 1400-1550 N/mm ²
Cutting speed	50 m/min (5.137 min ⁻¹)
Feed	205 mm/min (0.01 mm/t)
Depth of cut	9 mm
Coolant	Airblow
Machine	Hermle C32U
Interface	HSK63-A
Holder	Hydraulic chuck
Hole type	Blind hole

Tool	WH-EM-PNC M4
Work Material	Vanadis (Cold work steel) 64HRC
Cutting speed	30 m/min (3.082 min ⁻¹)
Feed	123 mm/min (0.01 mm/t)
Depth of cut	8 mm
Coolant	Airblow
Machine	n.a.
Interface	n.a.
Holder	Shrink holder
Hole type	Blind hole

WX-ST-PNC-3P

Threading | Thread milling | Metric & Metric Fine

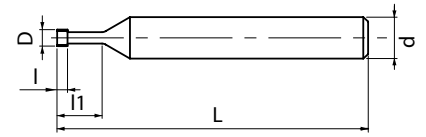

- Carbide thread milling cutter with 3 crest thread length
- WXS coating
- For all materials and hardened steels up to 50 HRC
- "ThreadPro" NC code generator software available

Threading | Thread milling

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ● 25-35 HRC	H ● 35-45 HRC	m/min
60-90	60-90	60-90	30-60	60-90	50-100	50-70	50-100	50-100	20-60	20-60	30-60	30-60	


M	MF	CARBIDE	SC D ≤ 1,3	WXS 1,5 ≤ D	11°	h6
----------	-----------	----------------	----------------------	-----------------------	------------	-----------

Metric & Metric Fine

EDP	D	Minimum cutting bore Ø	P	L	I	l1	d	Z	Price
48216000	1,3	M1,8	0,35	40	1,05	5,4	3	3	
48216001	1,5	M2	0,4	40	1,2	6	3	3	
48216002	1,9	M2,5	0,45	40	1,35	7,5	6	3	
48216003	2,4	M3	0,5	60	1,5	9,5	6	3	
48216004	3,1	M4	0,7	60	2,1	12,7	6	3	
48216005	4	M5	0,8	60	2,4	15,8	6	3	
48216006	4,5	M6	1	60	3	20	6	4	
48216007	6	M8	1,25	60	3,75	24	6	4	
48216008	7,5	M10	1,5	80	4,5	33	8	4	
48216009	12	M16	1,5	100	4,5	50	12	5	
48216010	16	M20	1,5	100	4,5	50	16	5	
48216011	9,5	M12	1,75	80	5,25	38	10	5	
48216012	12	M16	2	100	6	50	12	5	
48216013	16	M20	2	100	6	50	16	5	
48216014	16	M20	2,5	100	7,5	50	16	5	

WH-VM-PNC

Threading | Thread milling | Metric & Metric Fine

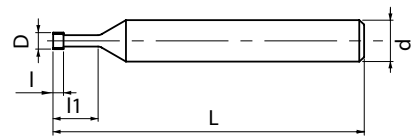

- Carbide thread milling cutter for small sizes
- WXS coating $1,5 \leq D$, SC coating $D_c \leq 1,3$
- For all materials and hardened steels up to 50 HRC
- "ThreadPro " NC code generator software available

Material compatibility icons:

- P: C < 0,2% (60-90)
- P: $0,25 < C < 0,4$ (60-90)
- P: C > 0,45% (60-90)
- P: SCM (30-60)
- M: INOX (60-90)
- K: GG (50-100)
- K: GGG (50-70)
- N: Al (50-100)
- N: AC,ADC (50-100)
- S: Ti (20-60)
- S: Ni (20-60)
- H: 25-35 HRC (30-60)
- H: 35-45 HRC (30-60)

m/min

Coatings and features:

- M
- MF
- CARBIDE
- SC ($D \leq 1,3$)
- WXS ($1,5 \leq D$)
- 11°
- h6

EDP	D	Minimum cutting bore \varnothing	Thread per flute	P	L	I	I1	d	Z	Price
3900495	0,72	M1	1	0,25	40	0,25	2,75	3	3	
3900496	0,92	M1,2	1	0,25	40	0,25	3,25	3	3	
3900497	1,05	M1,4	1	0,3	40	0,3	3,8	3	3	
3900498	1,2	M1,6	1	0,35	40	0,35	4,35	3	3	
3900499	1,3	M1,7 ~ M1,8	1	0,35	40	0,35	4,85	3	3	
3900500	1,5	M2	3	0,4	40	1,2	4,4	6	3	
3900501	1,9	M2,5 ~ M2,6	3	0,45	40	1,4	5,6	6	3	
3900502	2,4	M3	3	0,5	40	1,5	6,5	6	3	
3900503	3,1	M4	3	0,7	40	2,1	8,7	6	3	
3900504	4	M5	3	0,8	40	2,4	10,8	6	3	

Threading | Thread milling


Metric & Metric Fine

WX-PNC


Threading | Thread milling | Metric & Metric Fine



Type 1

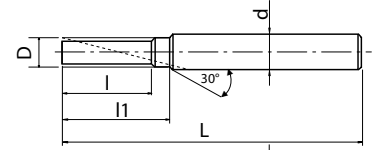

Type 2

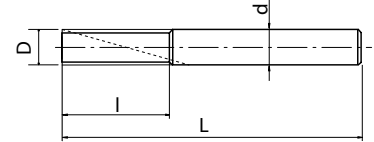

- Carbide thread milling cutter
- WX coating
- For all materials
- "ThreadPro" NC code generator software available

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ○ 25-35 HRC	H ○ 35-45 HRC	m/min
50-75	50-75	40-70	15-30	20-40	50-100	50-65	50-70	65-130	20-60	20-60	15-30	15-30	

M	MF	CARBIDE	WX	30°	h6
----------	-----------	----------------	-----------	------------	-----------

EDP	D	Minimum cutting bore Ø	P	L	l	l1	d	Z	Type	Price
3900001	4,5	M6	1	60	13	15	6	3	1	
3900011	6	M8	1	65	17	-	6	3	2	
3900012	6	M8	1,25	65	17,5	-	6	3	2	
3900021	7,5	M10	1	70	21	26	8	3	1	
1004470640	7,5	M10	1,25	70	21,3	26	8	3	1	
3900023	7,5	M10	1,5	70	22,5	26	8	3	1	
3900032	9,5	M12	1,25	85	26,3	28	10	4	1	
3900033	9,5	M12	1,5	85	25,5	28	10	4	1	
3900034	9,5	M12	1,75	85	26,3	28	10	4	1	
3900042	10	M14	1	85	29	-	10	4	2	
3900043	10	M14	1,5	85	30	-	10	4	2	
3900044	10	M14	2	85	30	-	10	4	2	
3900052	12	M16	1	95	33	-	12	4	2	
3900053	12	M16	1,5	95	34,5	-	12	4	2	
3900054	12	M16	2	95	34	-	12	4	2	
3900073	16	M20	1,5	105	42	-	16	4	2	
3900075	16	M20	2,5	105	42,5	-	16	4	2	
3900083	20	M27	1,5	120	49,5	-	20	5	2	
3900084	20	M27	2	120	50	-	20	5	2	
3900086	20	M27	3	120	51	-	20	5	2	

Threading | Thread milling


Metric & Metric Fine

WXO-ST-PNC


Threading | Thread milling | Metric & Metric Fine



Type 1

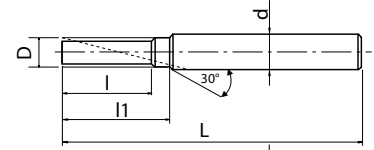

Type 2

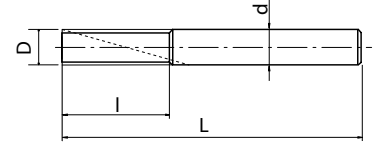

- Carbide thread milling cutter with Centre through coolant
- WX coating
- For all materials and hardened steels up to 45 HRC
- "ThreadPro" NC code generator software available

P ○ C < 0,2%	P ● 0,25 < C < 0,4	P ● C > 0,45%	P ● SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	H ● 25-35 HRC	H ● 35-45 HRC	m/min
80-120	80-120	80-120	80-120	40-80	50-100	50-65	50-70	65-130	60-100	60-100	

M	MF	CARBIDE	WX	11°		h6
----------	-----------	----------------	-----------	------------	--	-----------


EDP	D	Minimum cutting bore Ø	P	L	l	l1	d	Z	Type	Price
8304700	4,5	M6	0,75	60	12,8	15	6	4	1	
8304701	4,5	M6	1	60	13	15	6	4	1	
8304710	6	M8	0,5	65	16,5	-	6	4	2	
8304711	6	M8	1	65	17	-	6	4	2	
8304712	6	M8	1,25	65	17,5	-	6	4	2	
8304721	7,5	M10	1	70	21	26	8	4	1	
8304723	7,5	M10	1,5	70	22,5	26	8	4	1	
8304732	9,5	M12	1,25	85	26,3	28	10	5	1	
8304733	9,5	M12	1,5	85	25,5	28	10	5	1	
8304734	9,5	M12	1,75	85	26,3	28	10	5	1	
8304740	10	M14	0,5	85	28,5	-	10	5	2	
8304741	10	M14	0,75	85	29,3	-	10	5	2	
8304742	10	M14	1	85	29	-	10	5	2	
8304743	10	M14	1,5	85	30	-	10	5	2	
8304744	10	M14	2	85	30	-	10	5	2	
8304752	12	M16	1	95	33	-	12	5	2	
8304753	12	M16	1,5	95	34	-	12	5	2	
8304754	12	M16	2	95	34	-	12	5	2	
8304773	16	M20	1,5	105	42	-	16	5	2	
8304775	16	M20	2,5	105	42,5	-	16	5	2	
8304783	20	M27	1,5	120	49,5	-	20	6	2	
8304784	20	M27	2	120	50	-	20	6	2	
8304786	20	M27	3	120	51	-	20	6	2	

Threading | Thread milling

Metric & Metric Fine

WH-VM-PNC

Threading | Thread milling | U UNJ UNF UNJF

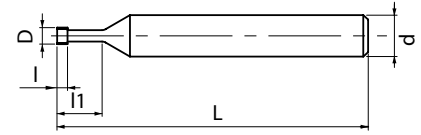

- Carbide thread milling cutter for small sizes
- SC coating $D_c \leq 1,3$
- For all materials and hardened steels up to 50 HRC
- "ThreadPro" NC code generator software available

Threading | Thread milling

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ● 25-35 HRC	H ● 35-45 HRC	m/min
60-90	60-90	60-90	30-60	60-90	50-100	50-70	50-100	50-100	20-60	20-60	30-60	30-60	

U	UNJ	UNF	UNJF	CARBIDE	WXS	11°	h6
---	-----	-----	------	---------	-----	-----	----

EDP	D	Minimum cutting bore Ø	Thread per flute	P	L	I	l1	d	Z	Price
3900513	3,2	N°8	3	32	40	2,4	9,1	6	3	


U UNJ UNF UNJF

WX-PNC


Threading | Thread milling | UNC & UNF



Type 1

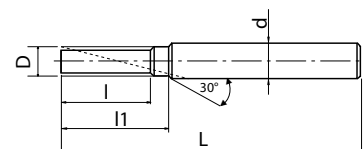

Type 2

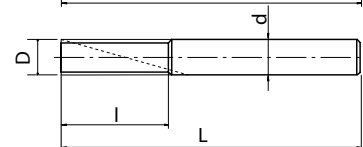

- Carbide thread milling cutter
- WX coating
- For all materials
- "ThreadPro" NC code generator software available

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ○ Ti	S ○ Ni	H ○ 25-35 HRC	H ○ 35-45 HRC	m/min
50-75	50-75	40-70	15-30	20-40	50-100	50-65	50-70	65-130	20-60	20-60	15-30	15-30	

UNC	UNF	CARBIDE	WX	30°	h6
-----	-----	---------	----	-----	----


EDP	D	Minimum cutting bore ø	P	L	I	I1	d	Z	Type	Price
3900350	4,55	1/4	20	60	10,2	11,4	6	3	1	
3900351	4,55	1/4	28	60	10	10,9	6	3	1	
3900355	6,2	5/16	18	65	12,7	14,1	8	3	1	
3900356	6,2	5/16	24	65	12,7	14,1	8	3	1	
3900360	7,6	3/8	16	65	14,3	-	8	3	2	
3900361	7,6	3/8	24	65	14,8	-	8	3	2	
3900365	8,8	7/16	14	75	18,1	19,9	10	3	1	
3900366	8,8	7/16	20	75	17,8	19,1	10	3	1	
3900370	9,4	1/2	13	75	19,5	21,5	10	4	1	
3900371	9,4	1/2	20	75	19,1	20,4	10	4	1	
3900375	10,9	9/16	12	85	23,3	25,4	12	4	1	
3900380	11,4	9/16	18	85	22,6	24	12	4	1	
3900390	18,9	7/8	12	110	33,9	36	20	4	1	

Threading | Thread milling

UNC & UNF

WX-ST-PNC-3P

Threading | Thread milling | G

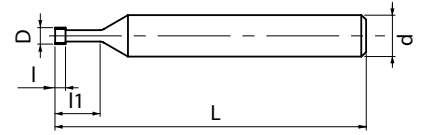

- Carbide thread milling cutter with 3 crest thread length
- WXS coating
- For all materials and hardened steels up to 50 HRC
- "ThreadPro" NC code generator software available

P ○ C < 0,2% 60-90	P ○ 0,25 < C < 0,4 60-90	P ○ C > 0,45% 60-90	P ○ SCM 30-60	M ○ INOX 60-90	K ○ GG 50-100	K ○ GGG 50-70	N ○ Al 50-100	N ○ AC,ADC 50-100	S ● Ti 20-60	S ● Ni 20-60	H ● 25-35 HRC 30-60	H ● 35-45 HRC 30-60	m/min
---------------------------------	---------------------------------------	----------------------------------	----------------------------	-----------------------------	----------------------------	----------------------------	----------------------------	--------------------------------	---------------------------	---------------------------	----------------------------------	----------------------------------	-------

G

CARBIDE

WXS

11°

h6


EDP	D	Minimum cutting bore Ø	P	L	l	l1	d	Z	Price
48216100	5,9	G1/8 G1/16	28	64	2,72	19,5	8	4	
48216101	10	G1/4 G3/8	19	80	4	30	10	5	
48216102	12	G1/2 G7/8	14	100	5,44	37	12	5	
48216103	16	G1 G2	11	100	6,93	48	16	5	

WX-PNC


Threading | Thread milling | G



Type 1

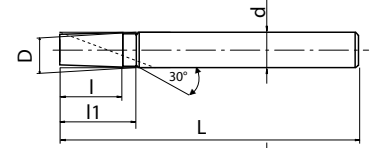

Type 2

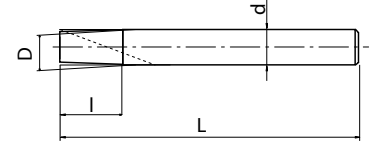

- Carbide thread milling cutter
- WX coating
- For all materials
- "ThreadPro" NC code generator software available

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ○ 25-35 HRC	H ○ 35-45 HRC	m/min
50-75	50-75	40-70	15-30	20-40	50-100	50-65	50-70	65-130	20-60	20-60	15-30	15-30	

G	CARBIDE	WX	30°	h6
----------	----------------	-----------	------------	-----------

EDP	D	Minimum cutting bore \emptyset	P	L	l	l1	d	Z	Type	Price
3900299	5,9	1/16 - 1/8	28	60	11,8	-	6	3	2	
3900301	7,5	1/8	28	65	14,5	15,4	8	3	1	
3900311	10	1/4 - 3/8	19	75	20,1	-	10	4	2	
3900312	11	3/8	19	85	25,4	26,7	12	4	1	




WX-PNC


Threading | Thread milling | RC



Type 1

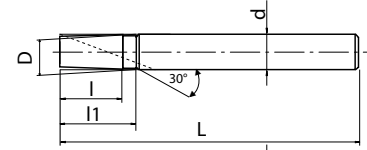

Type 2

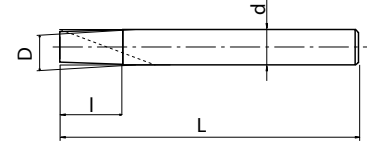

- Carbide thread milling cutter
- WX coating
- For all materials
- "ThreadPro" NC code generator software available

Threading | Thread milling

P ○ C < 0,2%	P ○ 0,25 < C < 0,4	P ○ C > 0,45%	P ○ SCM	M ○ INOX	K ○ GG	K ○ GGG	N ○ Al	N ○ AC,ADC	S ● Ti	S ● Ni	H ○ 25-35 HRC	H ○ 35-45 HRC	m/min
50-75	50-75	40-70	15-30	20-40	50-100	50-65	50-70	65-130	20-60	20-60	15-30	15-30	

Rc (PT)	CARBIDE	WX	30°	h6
-------------------	----------------	-----------	------------	-----------

EDP	D	Minimum cutting bore \varnothing	P	L	I	l1	d	Z	Type	Price
3900201	7,5	1/8	28	60	9,1	12,7	8	3	1	
3900211	10	1/4~3/8	19	75	14,7	-	10	4	2	
3900214	12	1/2~3/4	14	85	20	-	12	4	2	
3900218	20	1~2	11	95	27,7	-	20	5	2	

RC

CUTTING CONDITIONS

Threading | Thread mills | Cutting conditions

AT-1

Work Material		Vc (m/min)	F (mm/tooth)
Low Tensile Strength Steel	C~0,25%	80~160	0,01~0,05
Medium Tensile Strength Steel	C~0,25% ~ 0,45%	80~160	0,01~0,05
High Tensile Strength Steel	C0,45%~	80~160	0,01~0,05
Alloy Steel	SCM	60~120	0,01~0,05
Hardened Steel	25~45 HRC	80~200	0,01~0,05
	45~55 HRC	-	-
	50~60 HRC	-	-
Stainless Steel	SUS	60~120	0,01~0,05
Tool Steel	SKD	-	-
Cast Steel	SC	60~120	0,01~0,05
Cast Iron	FC	80~160	0,01~0,05
Ductile Cast Iron	FCD	60~120	0,01~0,05
Copper	Cu	80~160	0,03~0,1
Brass	Bs	80~160	0,03~0,1
Brass Casting	BsC	80~160	0,03~0,1
Bronze	PB	80~160	0,03~0,1
Aluminium Rolled Steel	AL	80~160	0,03~0,1
Aluminium Alloy Casting	AC, ADC	100~300	0,05~0,2
Magnesium Alloy Casting	MC	100~300	0,05~0,2
Zinc Alloy Casting	ZDC	100~300	0,05~0,2
Titanium Alloys	Ti-6AL-4V	-	-
Nickel Alloys	Inconel®	-	-
Thermosetting plastic	-	80~160	0,03~0,1
Thermoplastic	-	80~160	0,03~0,1

1. The indicated speeds and feeds are for water-soluble oil.
2. Water-soluble oil is not suitable for tapping magnesium alloy.
3. Please adjust the cutting conditions depending on the rigidity of machine, tool holders, and workpiece clamping.
4. If the tapping length is long, or when machining a large-pitch thread, select a smaller feed rate and separate the machining process into a few segments.
5. If a machined parallel internal thread is tapered and prevents the go-gauge from going through, add a zero cut (finish machining).

Threading | Thread milling

Cutting conditions

WH-VM-PNC/WX-ST-PNC-3P

Work Material		Vc (m/min)	F (mm/tooth)
Low Tensile Strength Steel	C~0,25%	60~90	0,02~0,08
Medium Tensile Strength Steel	C~0,25% ~ 0,45%	60~90	0,02~0,08
High Tensile Strength Steel	C0,45%~	60~90	0,02~0,08
Alloy Steel	SCM	30~60	0,01~0,03
Hardened Steel	25~45 HRC	30~60	0,01~0,03
	45~55 HRC	30~60	0,01~0,03
	50~60 HRC	-	-
Stainless Steel	SUS	60~90	0,02~0,08
Tool Steel	SKD	-	-
Cast Steel	SC	40~65	0,02~0,09
Cast Iron	FC	50~100	0,03~0,1
Ductile Cast Iron	FCD	50~70	0,03~0,1
Copper	Cu	-	-
Brass	Bs	-	-
Brass Casting	BsC	50~100	0,02~0,06
Bronze	PB	50~100	0,02~0,06
Aluminium Rolled Steel	AL	50~100	0,02~0,06
Aluminium Alloy Casting	AC, ADC	50~100	0,02~0,06
Magnesium Alloy Casting	MC	50~100	0,02~0,06
Zinc Alloy Casting	ZDC	50~100	0,02~0,06
Titanium Alloys	Ti-6AL-4V	20~60	0,01~0,03
Nickel Alloys	Inconel®	20~60	0,01~0,03
Thermosetting plastic	-	50~100	0,02~0,06
Thermoplastic	-	50~100	0,02~0,06

CUTTING CONDITIONS

Threading | Thread mills | Cutting conditions

WXO-ST-PNC


Work Material		Vc (m/min)	F (mm/tooth)
Low Tensile Strength Steel	C~0,25%	80~120	0,04~0,1
Medium Tensile Strength Steel	C~0,25% ~ 0,45%	80~120	0,04~0,1
High Tensile Strength Steel	C0,45%~	80~120	0,04~0,1
Alloy Steel	SCM	80~120	0,02~0,08
Hardened Steel	25~45 HRC	60~100	0,02~0,08
	45~55 HRC	-	-
	50~60 HRC	-	-
Stainless Steel	SUS	40~80	0,02~0,06
Tool Steel	SKD	-	-
Cast Steel	SC	40~65	0,02~0,09
Cast Iron	FC	50~100	0,03~0,1
Ductile Cast Iron	FCD	50~65	0,03~0,1
Copper	Cu	65~130	0,03~0,1
Brass	Bs	65~130	0,03~0,1
Brass Casting	BsC	65~130	0,03~0,1
Bronze	PB	65~130	0,03~0,1
Aluminium Rolled Steel	AL	50~70	0,03~0,1
Aluminium Alloy Casting	AC, ADC	65~130	0,03~0,1
Magnesium Alloy Casting	MC	65~130	0,03~0,1
Zinc Alloy Casting	ZDC	65~130	0,03~0,1
Titanium Alloys	Ti-6AL-4V	20~60	0,02~0,06
Nickel Alloys	Inconel®	20~60	0,01~0,03
Thermosetting plastic	-	65~130	0,03~0,13
Thermoplastic	-	65~130	0,03~0,13

WX-PNC

Work Material		Vc (m/min)	F (mm/tooth)
Low Tensile Strength Steel	C~0,25%	50~75	0,01~0,11
Medium Tensile Strength Steel	C~0,25% ~ 0,45%	40~70	0,01~0,11
High Tensile Strength Steel	C0,45%~	40~70	0,01~0,01
Alloy Steel	SCM	15~30	0,01~0,03
Hardened Steel	25~45 HRC	15~30	0,01~0,03
	45~55 HRC	-	-
	50~60 HRC	-	-
Stainless Steel	SUS	20~40	0,01~0,06
Tool Steel	SKD	-	-
Cast Steel	SC	40~65	0,02~0,09
Cast Iron	FC	50~100	0,03~0,1
Ductile Cast Iron	FCD	50~65	0,03~0,1
Copper	Cu	65~130	0,03~0,1
Brass	Bs	65~130	0,03~0,1
Brass Casting	BsC	65~130	0,03~0,1
Bronze	PB	65~130	0,03~0,1
Aluminium Rolled Steel	AL	50~70	0,03~0,1
Aluminium Alloy Casting	AC, ADC	65~130	0,03~0,1
Magnesium Alloy Casting	MC	65~130	0,03~0,1
Zinc Alloy Casting	ZDC	65~130	0,03~0,1
Titanium Alloys	Ti-6AL-4V	20~60	0,02~0,06
Nickel Alloys	Inconel®	20~60	0,01~0,03
Thermosetting plastic	-	65~130	0,03~0,13
Thermoplastic	-	65~130	0,03~0,13

Machining Technique


OSG's Thread Mills are developed for thread milling on a 3-Axis CNC controlled machine tool. Threads are produced by advancing one pitch feed per revolution in the axial direction, utilizing the planet-like rotation and revolution movements of the tool. Internal/external and right/left hand threads can all be produced with this one tool by simply changing the direction of rotation and/or feed

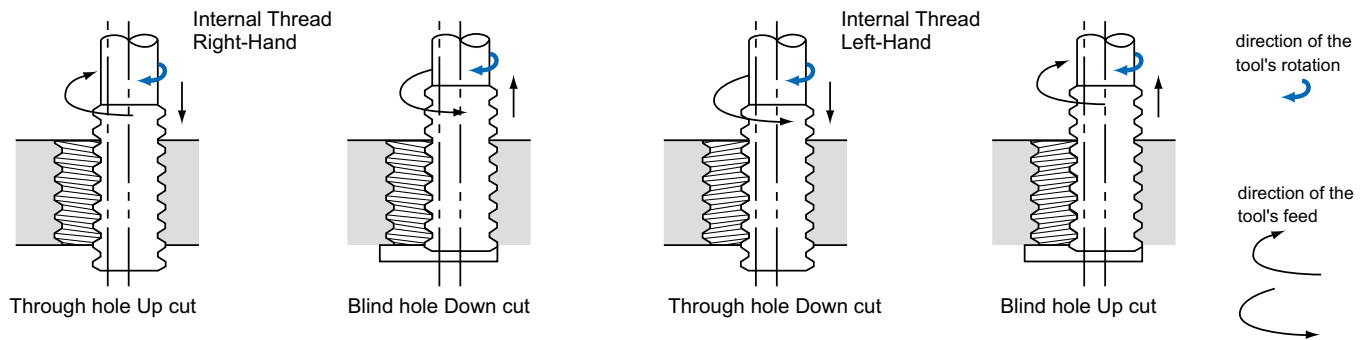

Threading Process

- 1-2 Move to edge (maintain clearance)
- 2-3 Cut with helical milling
- 3-4 Mill the circumference of the circle
- 4-5 Pull away from the edge
- 5-6 Remove tool

The transition between the start and finish of the milling operation must be smooth and the appropriate amount of feed is essential for minimizing milling resistance. There are many different methods for using this tool, but our research has shown that this technique provides the most precise and efficient operation.

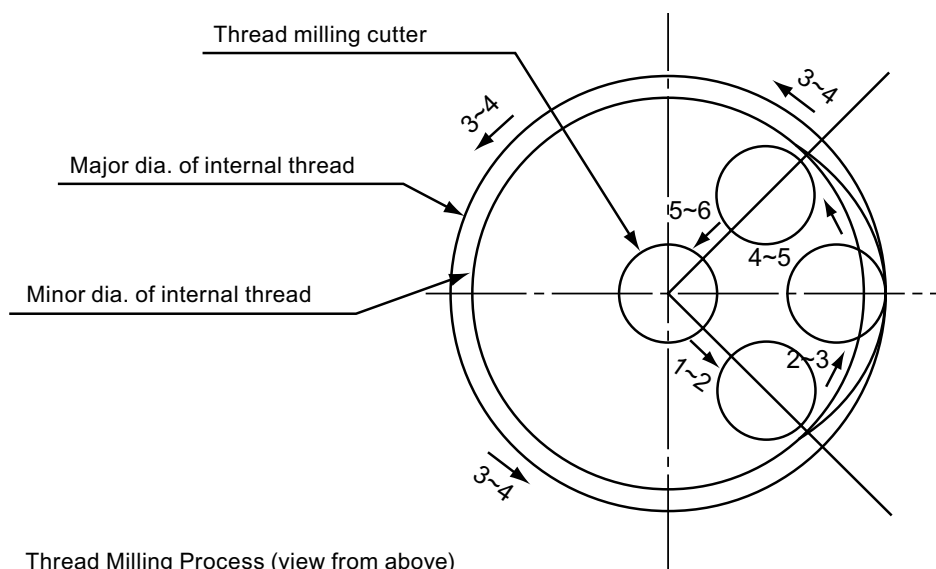

Thread Milling Process (view from above)

Machining small diameter internal threads with stainless steel

Tool	WH-VM-PNC 0,72 P0,25	Competitor	Description	Tool Life	
	SUS304			100	200
Work Material	SUS304		WH-VM-PNC	212 Holes → Gauge-Out	
Cutting Speed	80m/min (35.367min ⁻¹)			235 Holes → Gauge-Out	
Feed	594mm/min (0.02mm/t)		Competitor	122 Holes → Gauge-Out	
Internal Thread Size	M1x0.25			198 Holes → Gauge-Out	
Drill Hole Size	φ0.78x2.5mm (Blind)				
Tapping Length	2mm (2D) (Blind)				
Machining Method	Up Cut 2 passes				
Coolant	Water Soluble				
Machine	(HSK-E25) Vertical Machining Center				

The WH-VM-PNC was able to perform stably with water-soluble coolant in stainless steel, a difficult process for cut taps. It was able to achieve long tool life and perform stably when tapping M1 threads. When processing threads with limited tap drill hole depth allowance for tap drill holes, the WH-VM-PNC was able to perform more stably than a conventional cut tap.


Machining small diameter internal threads with Inconel 718

Tool	WH-VM-PNC 3,2 x 2,4 U32		Cutting Speed	N° of Passes	Number of Holes			
	Inconel 718 (40HRC)				20	40	60	80
Work Material	Inconel 718 (40HRC)		40m/min	4	50 Holes → Substantial tool chipping			
Cutting Speed	40m/min (3.980min ⁻¹)	60m/min (5.970min ⁻¹)			60 Holes → Substantial tool chipping			
Feed	120mm/min (0,03mm/t)	180mm/min (0,03mm/t)	60m/min	2	40 Holes → Substantial tool chipping			
Internal Thread Size	N°10~32 UNF							
Drill Hole Size	φ4,1x14mm (Blind)							
Tapping Length	9mm (1,9D) (Blind)							
Machining Method	Down Cut 2-4 passes							
Coolant	Water Soluble							
Machine	(HSK-A40) Vertical Machining Center							

Compared to taps, thread mills have fewer cutting condition limitations. There are no worries about chip management or coolant lubricity, and stable tapping is possible. In this example, we were able to improve the yield rate of small diameter internal threads in a high value workpiece. Further durability improvements and cost reductions can be expected by adjusting the feed rate and number of passes, and changing the cutting fluid.


Outstanding Performance in Stainless with Water-Soluble Coolant

Tool	WX-ST-PNC 7,5x9,1RC 28
Work Material	SUS304
Cutting Speed	130m/min (9.970min ⁻¹)
Feed	607mm/min (0,1mm/t)
Internal Thread Size	Rc 1/8-28
Drill Hole Size	φ8,2x9mm (Though)
Tapping Length	6,2 mm
Machining Method	Down Cut
Coolant	Water Soluble
Machine	Vertical Machining Center

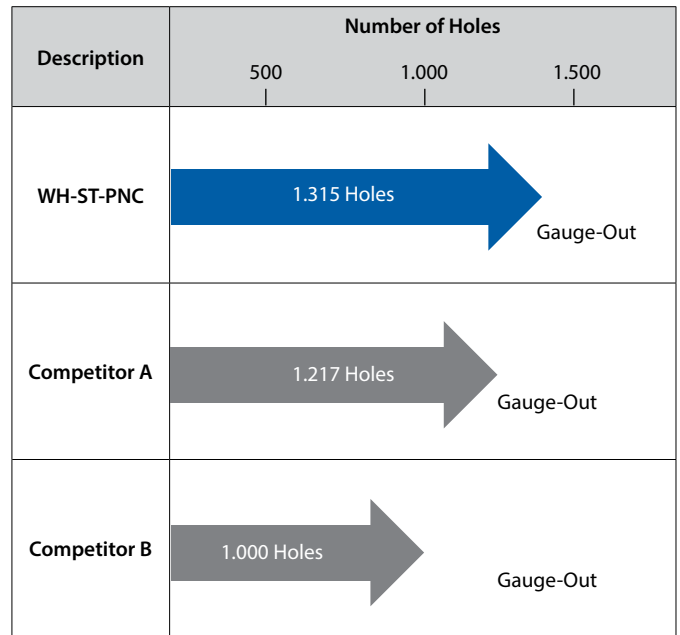

Tool life comparison against other competitors under identical cutting condition in SUS304. The tool life of the WX-ST-PNC was slightly higher than other competitors. Also, in terms of tool wear, it was the only tool that was in fair enough condition for regrinding.


Tool Wear Amount

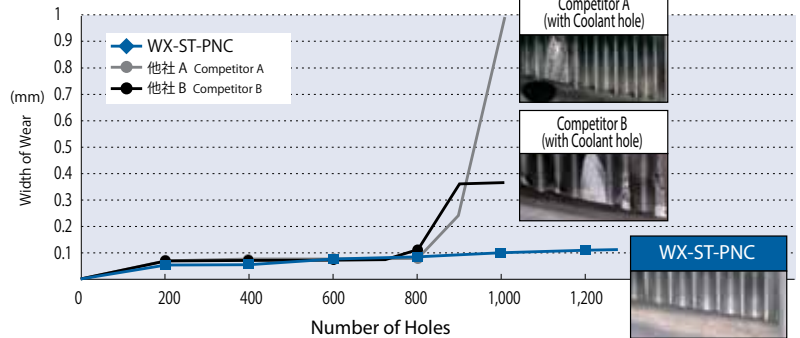

Stable performance in S45C

Tool	WX-ST-PNC 7,5x9,1RC 28
Work Material	S45C
Cutting Speed	100m/min (4.592min ⁻¹)
Feed	327mm/min (0,07mm/t)
Internal Thread Size	Rc 1/8-28
Drill Hole Size	φ8,2x9mm (Though)
Tapping Length	6,2 mm
Machining Method	Down Cut
Coolant	Water Soluble
Machine	Vertical Machining Center (BT30)


Pitch-dia. Reduced amount

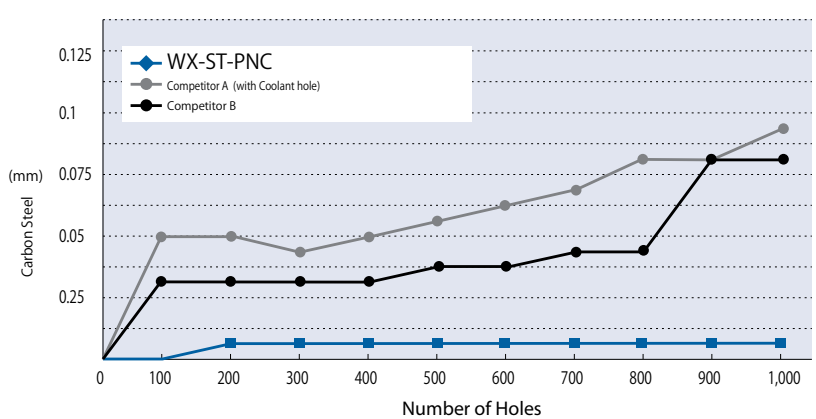

Cutting results in S45C. The WX-ST-PNC was able to stably process 1,000 holes with minimal changes in the effective diameter.

Long tool life when high-speed machining hardened steels


Tool	WXO-ST-PNC 9,5 x 26,3 P1,75
Work Material	SCM440 (40HRC)
Cutting Speed	100m/min (3.351min ⁻¹)
Feed	349mm/min (0.1mm/t)
Internal Thread Size	M12x1,75
Drill Hole Size	φ10,3
Tapping Length	20 mm
Machining Method	Down Cut 2 passes
Coolant	Water Soluble (10%) (Internal)
Machine	Vertical Machining Center

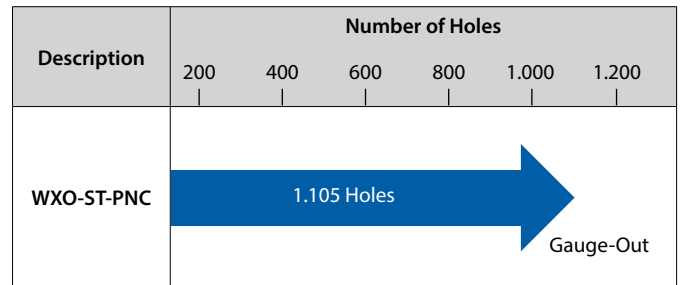


Machined continuously without making tool diameter corrections.

In this example, even when high-speed machining at 100m/min with internally supplied coolant, there was no chipping and long tool life was achieved. The internal threads' pitch diameter measurement was stable, demonstrating the effectiveness of this tool in mass production machining.

Pitch diameter of internal thread

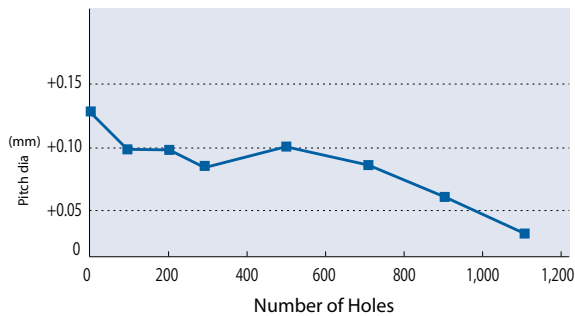


Changes in the extent of wear on the outer circumference

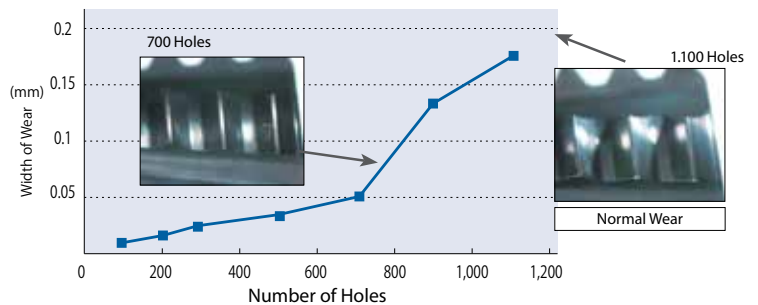


Stable machining in stainless steels, Wear is 40% less than the competitor

Tool	WXO-ST-PNC 9,5 x 26,6 P1,75
Work Material	SUS 304
Cutting Speed	80m/min (2.681min ⁻¹)
Feed	168mm/min (0,06 mm/t)
Internal Thread Size	M12x1,75
Tapping Length	23 mm
Coolant	Water Soluble
Machine	Vertical Machining Center (BT40)

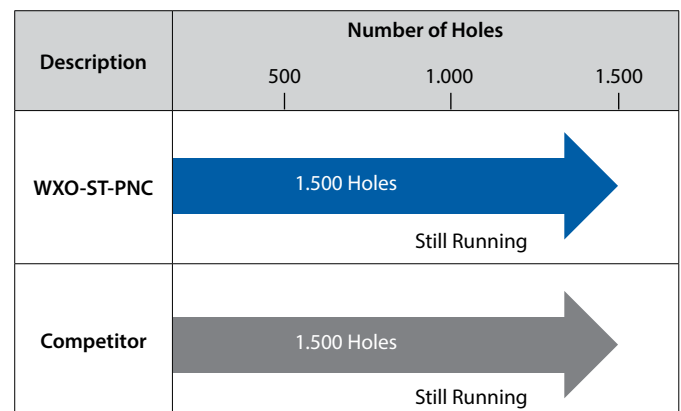

Even when machining stainless steel at 80m/min, it was possible to machine over 1,500 holes, and tool wear was 40% less than the competitor's product. Low wear, slow wear progression and long, stable machining of internal threads were achieved.

Changes in the extent of wear on the outer circumference

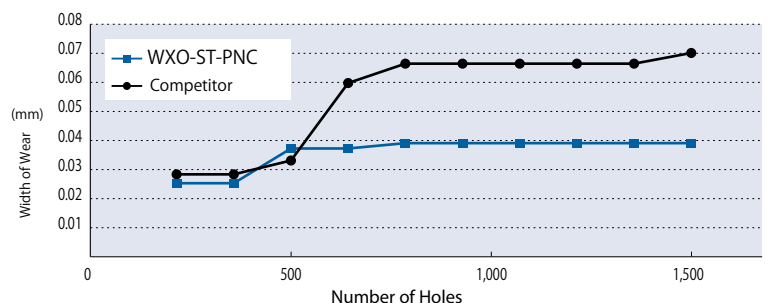

In non-ferrous materials, WX-PNC has excellent durability

Tool	WX-PNC 7,6 x 14,3 U16	Number of Holes			
Description		2.000	4.000	6.000	8.000
Work Material	A7075				
Cutting Speed	160m/min (6.701min ⁻¹)				
Feed	650mm/min (0,16 mm/t)				
Internal Thread Size	3/8-16				
Tapping Length	12 mm				
Coolant	Water Soluble				
Machine	Vertical Machining Center (BT40)				

Even after machining 8,800 holes in A7075 with a cutting speed of 160m/min, tool wear was negligible. It was still possible for the WX-PNC to continue much more, effectively achieving stable machining of internal threads on a machining center.



No.1 (after cutting 8,800 threads)




No.2 (after cutting 8,800 threads)

The WX-PNC is also for heat-resistant steels. It achieved twice the tool life of the competitor in Inconel 718

Tool	WX-PNC 4,55 x 10,8 U20
Work Material	Inconel 718 (43HRC)
Internal Thread Size	1/4-20 UNC
Tapping Length	9 mm
Feed per Tooth	0,03 mm/t
Coolant	Water Soluble (10%)
Machine	Horizontal Machining Center

Cutting Speed and Durability Count

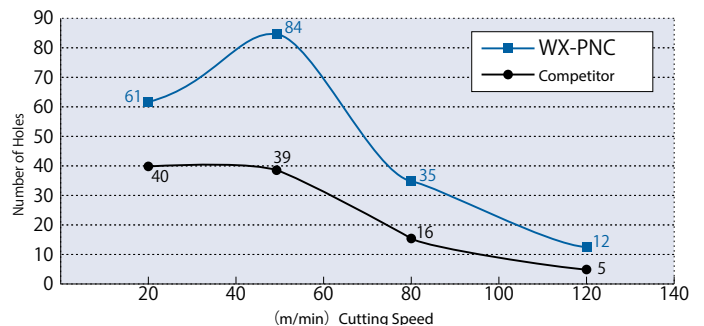

These are the test results in Inconel® 718 at various cutting speeds. At cutting speeds under 50m/min, durability is better and this seems to be an effective machining range. The WX-PNC achieves twice the tool life of the competitor, no matter the cutting speed.

FEEDBACK FROM THREADPRO USERS

"An increased variety of NC machines to select from has helped me a lot." (User)

"The RPRG is very convenient! Before RPRG, I set the depth of cut on a trial-and-error basis for the first session. Now I can confidently set the depth correctly the first time." (User)

"I have no trouble selecting a tool, although it has been difficult for me to find the right combination of a holder and an insert . (Distributor)

"It is very convenient and easy to select the type of the tool or cutting edge according to the cutting context." (User)

"The search results show relevant tool profiles and dimensions, for which I am glad." (User)


VOICE OF THREADPRO DEVELOPER

In recent years, various theories concerning cutting have been proposed for end milling, considering load control and cutting efficiency. This is due to higher flexibility in end milling than in tapping. Thread mill is a thread cutting tool. However, as cutting methods it is closer to end mills than taps. Accordingly, to achieve optimal thread milling, parameters should include the cutting path as well as other cutting conditions. Nevertheless, because the workings of a thread mill are inherently complex, it is very difficult for the user to achieve the proper arrangement. OSG has radically updated the NC program development software to enable users to realize their ideas with increased ease and make more effective use of their tools than before.



SUPPORT TOOLS FOR YOUR THREAD MILLING NEEDS


Reduce setup, machining time, and achieve stable tool life with these 3 support tools.

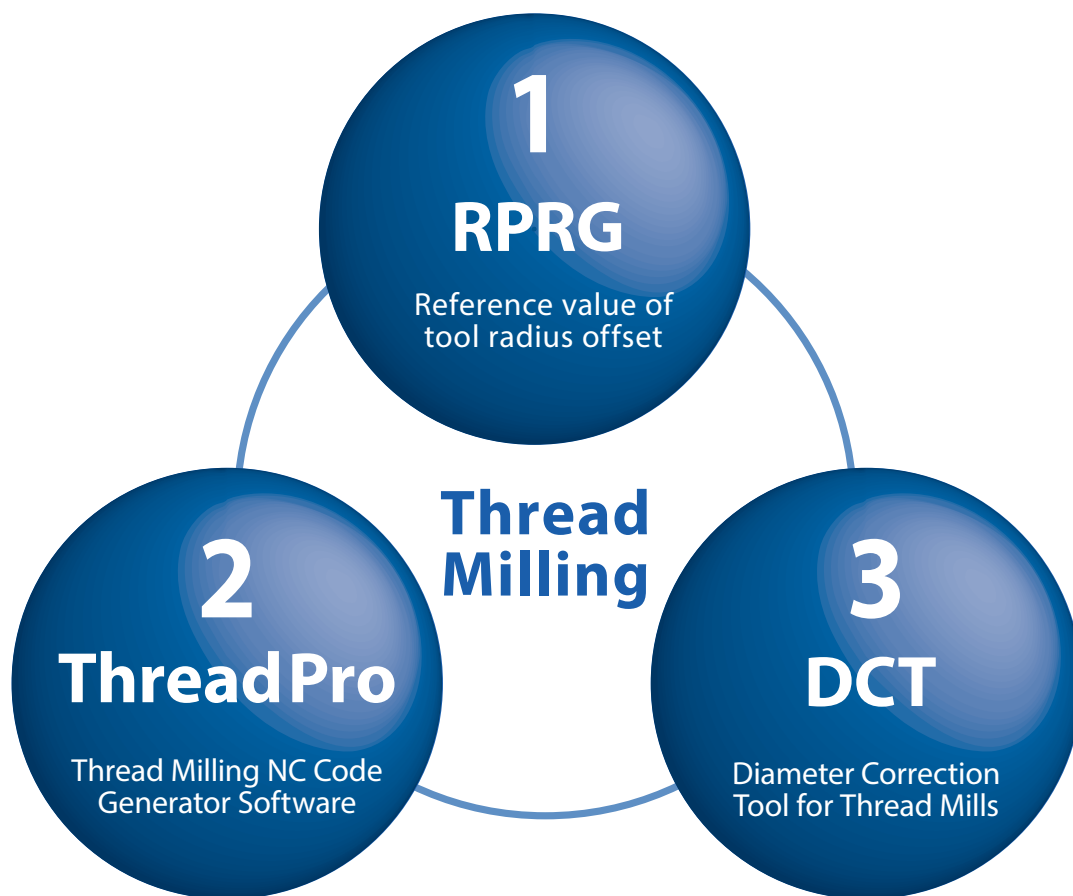

1 RPRG

RPRG is the reference value of tool radius offset

Conventionally, the tool radius was entered during setup as a parameter of the NC system, which was corrected by checking the thread with a gauge. However, it has become possible to reduce the checking and correction simply by entering the RPRG value indicated on the tool shank.

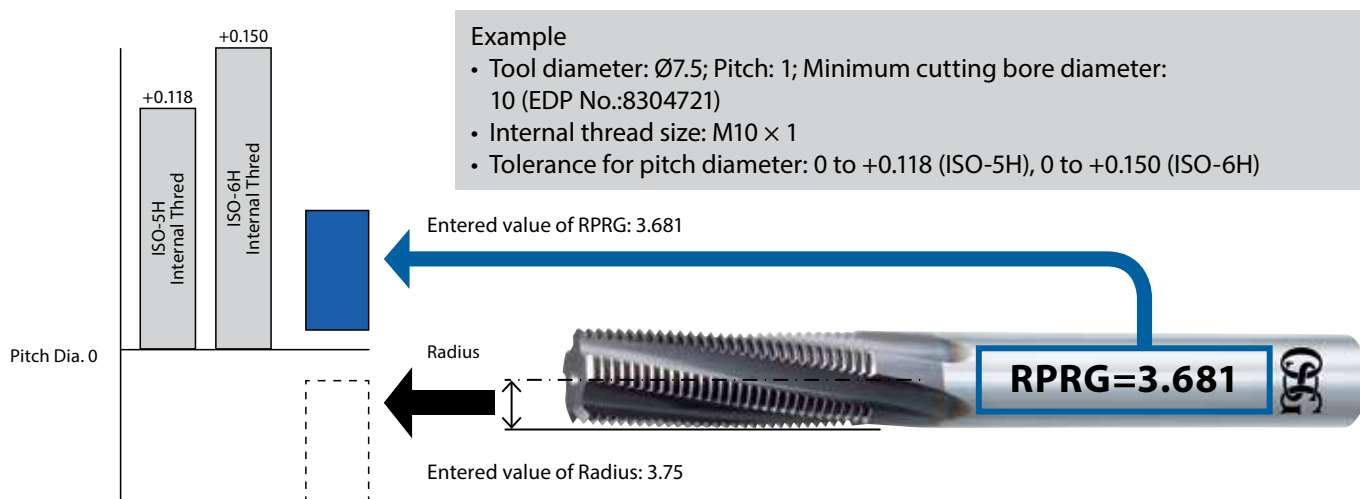


SUPPORT TOOLS FOR YOUR THREAD MILLING NEEDS

2 ThreadPro

Revamped thread milling NC Code Generator Software "ThreadPro"

Generate codes for complex machining couldn't be easier. Create machining programs at ease with OSG's revamped NC code generator software ThreadPro.

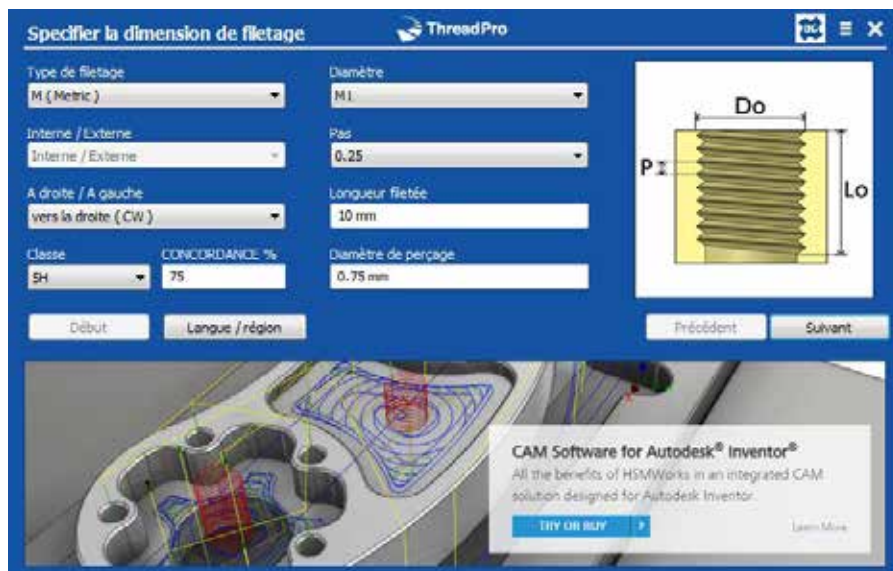

3 Key Revamped Features


- Available in 12 different languages
- Supports 8 NC programming languages
- Calculates the most appropriate RPRG value

Scan to download ThreadPro.




ThreadPro with Comprehensive Features


1. Generate programs for zero cut at ease
2. High quality machining by stair passes
3. Capability to review machining trajectory to reduce tool damage

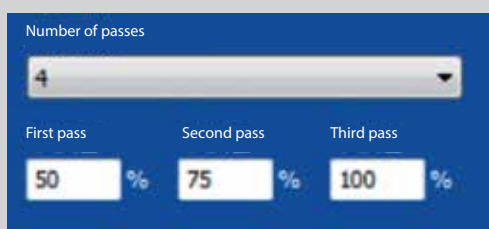

Pass type: continuous




Pass type: stairs



3 Reduce setup & machining time

The internal thread effective diameter, which used to be difficult to determine, can now be measured with readable values.

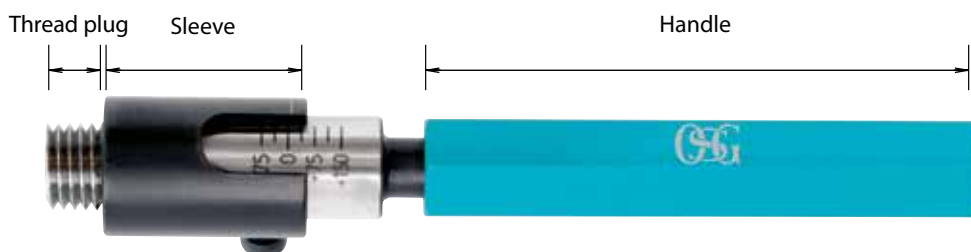

KEY FEATURES: DCT



1 Reduce setup & machining time

RPRG values are indicated on tool shank manufactured from November 2014. Now possible to reduce the checking and correction simply by entering the RPRG value.

2 Scale sleeve

Measurable range 100% ~ 50% tolerance of thread size (6H)


3 7 positions on the reading scale

With an attached reading scale, the effective diameter's position can be confirmed at a glance.

KEY FEATURES & BENEFITS

1 Reduce setup & machining time


The internal thread effective diameter, which used to be difficult to determine, can now be measured with readable values.

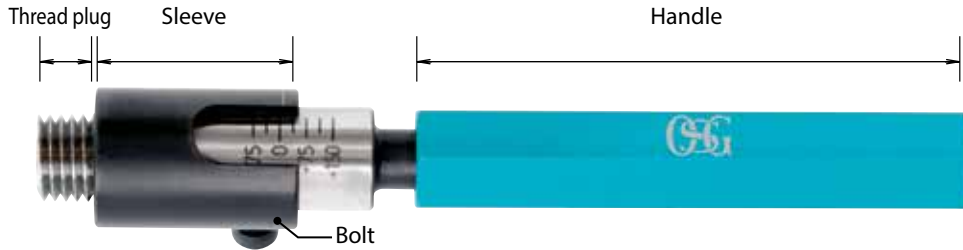





2 Scale sleeve

The DCT is made up of three components – the thread plug, scale sleeve and bolt for fixing the position. Measurable range from 100% ~ -50% tolerance of thread size (6H); with 7 positions on the reading scale.

Effective diameter & position relationship diagram

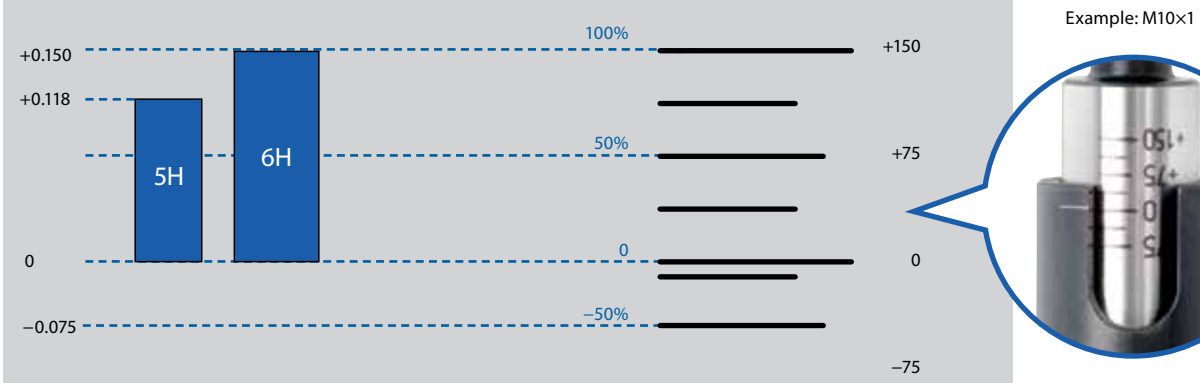

3 Measuring method

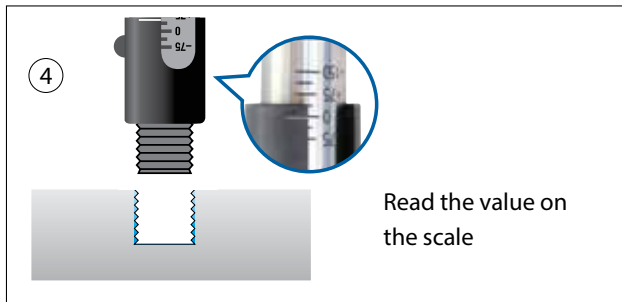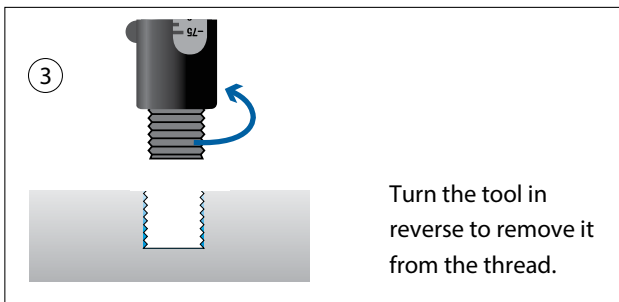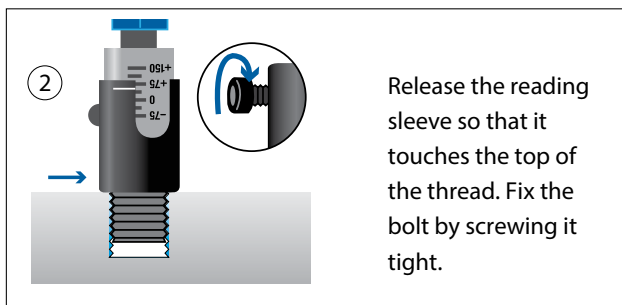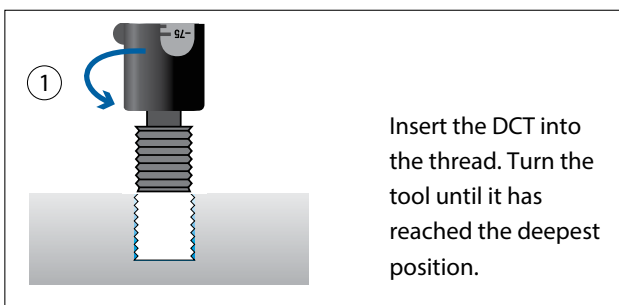

* The reading value should be used as reference only. To inspect the screw thread please use the limit gauge (refer to p.6).
 * Depending on work environment this product may not be applicable.



shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
Fax: +32 10 23 05 51
info@osgeurope.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
Fax: +32 10 23 05 31
info@osg-belgium.com

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
Fax: +33 1 49 90 10 15
sales@osg-france.com

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
Fax: +31 348 44 2144
info@osg-nl.com

OSG UK

Shelton house, 5 Bentalls
Pipps Hill Ind Est, Basildon Essex SS14 3BY
Tel: +44 845 305 1066
Fax: +44 845 305 1067
sales@osg-uk.com

SLOVAKIA

Branch office of OSG Europe Logistics s.a.
Tel (SK) +421 2 4329 1295
Tel (BE) +32 10 23 05 07
Fax (BE) +32 10 23 05 51
sales-osgsvk@osgeurope.com

OSG POLAND Sp. z.o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
Fax: +22 760 82 71
osg@osg-poland.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
Fax: +45 46 75 67 00
osg@osg-scandinavia.com

SWEDEN

Branch office of OSG SCANDINAVIA
Abrahams Gränd 8
295 35 Bromölla - Sweden
Tel: +46 40 41 22 55
Fax: +46 40 41 32 55
osg@osg-scandinavia.com

OSG COMAHER

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
Fax: +34 945 228 883
osg.iberica@osg-ib.com

RUSSIA

Butlerova street, 17B, office 5069
117342 Moscow - Russia
Tel: +7 (495) 150 41 54
info@osg-russia.com

OSG TURKEY

Rami Kişla Cad.No:56 Eyüp
Istanbul 34056 - Turkey
Tel:+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

ROMSAN INTERNATIONAL CO. SRL

Reprezentant Exclusiv OSG
23-25, Nerva Traian Street
031044 Bucuresti - România
Tel: +40 021 322 07 47
Fax: +40 021 321 56 00
romsan.int@romsan.ro

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
Fax: +49 7161 6064-444
info@osg-germany.de

OSG ITALIA

Via Cirenaiica n. 52 int. 61/63
I - 10142 Torino - Italy
Tel: +39 0117705211
Fax: +39 0117071402
info@osg-italia.it

Vischer & Bolli AG

Im Schossacher 17
CH-8600 Dübendorf
Schweiz
Tel.: +41 44 802 15 15
Fax: +41 44 802 15 95
info@vb-tools.com

OSG EUROPE LOGISTICS S.A.

08/2017 - All rights reserved. © OSG Europe 2017.

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com

