



Coolant-through carbide drill series for Titanium Alloys and Stainless Steel

# ADO-SUS

Volume 6



# KEY FEATURES: ADO-SUS SERIES

---

- 
- 1 Sharp cutting edge
  - 2 New flute geometry
  - 3 Special margin shape
  - 4 New coolant hole shape

5 WXL® Coating





# ADO-SUS DRILL FOR STAINLESS STEELS, TITANIUM ALLOYS & VARIOUS MATERIALS

OSG's next generation of carbide drills is an almighty one. Focused on the reduction of thrust and aimed at machining Stainless Steel, ADO-SUS-3D/5D is the perfect drill to use for your machine. The flute design produces optimal chip shape, thereby realizing smooth chip evacuation.

The margin form is designed to realize low resistance and low cutting temperature.

Common machining problems associated with these materials :

- Work hardening tendency
- Elongation of chips
- Low thermal conductivity
- Welding on cutting tool

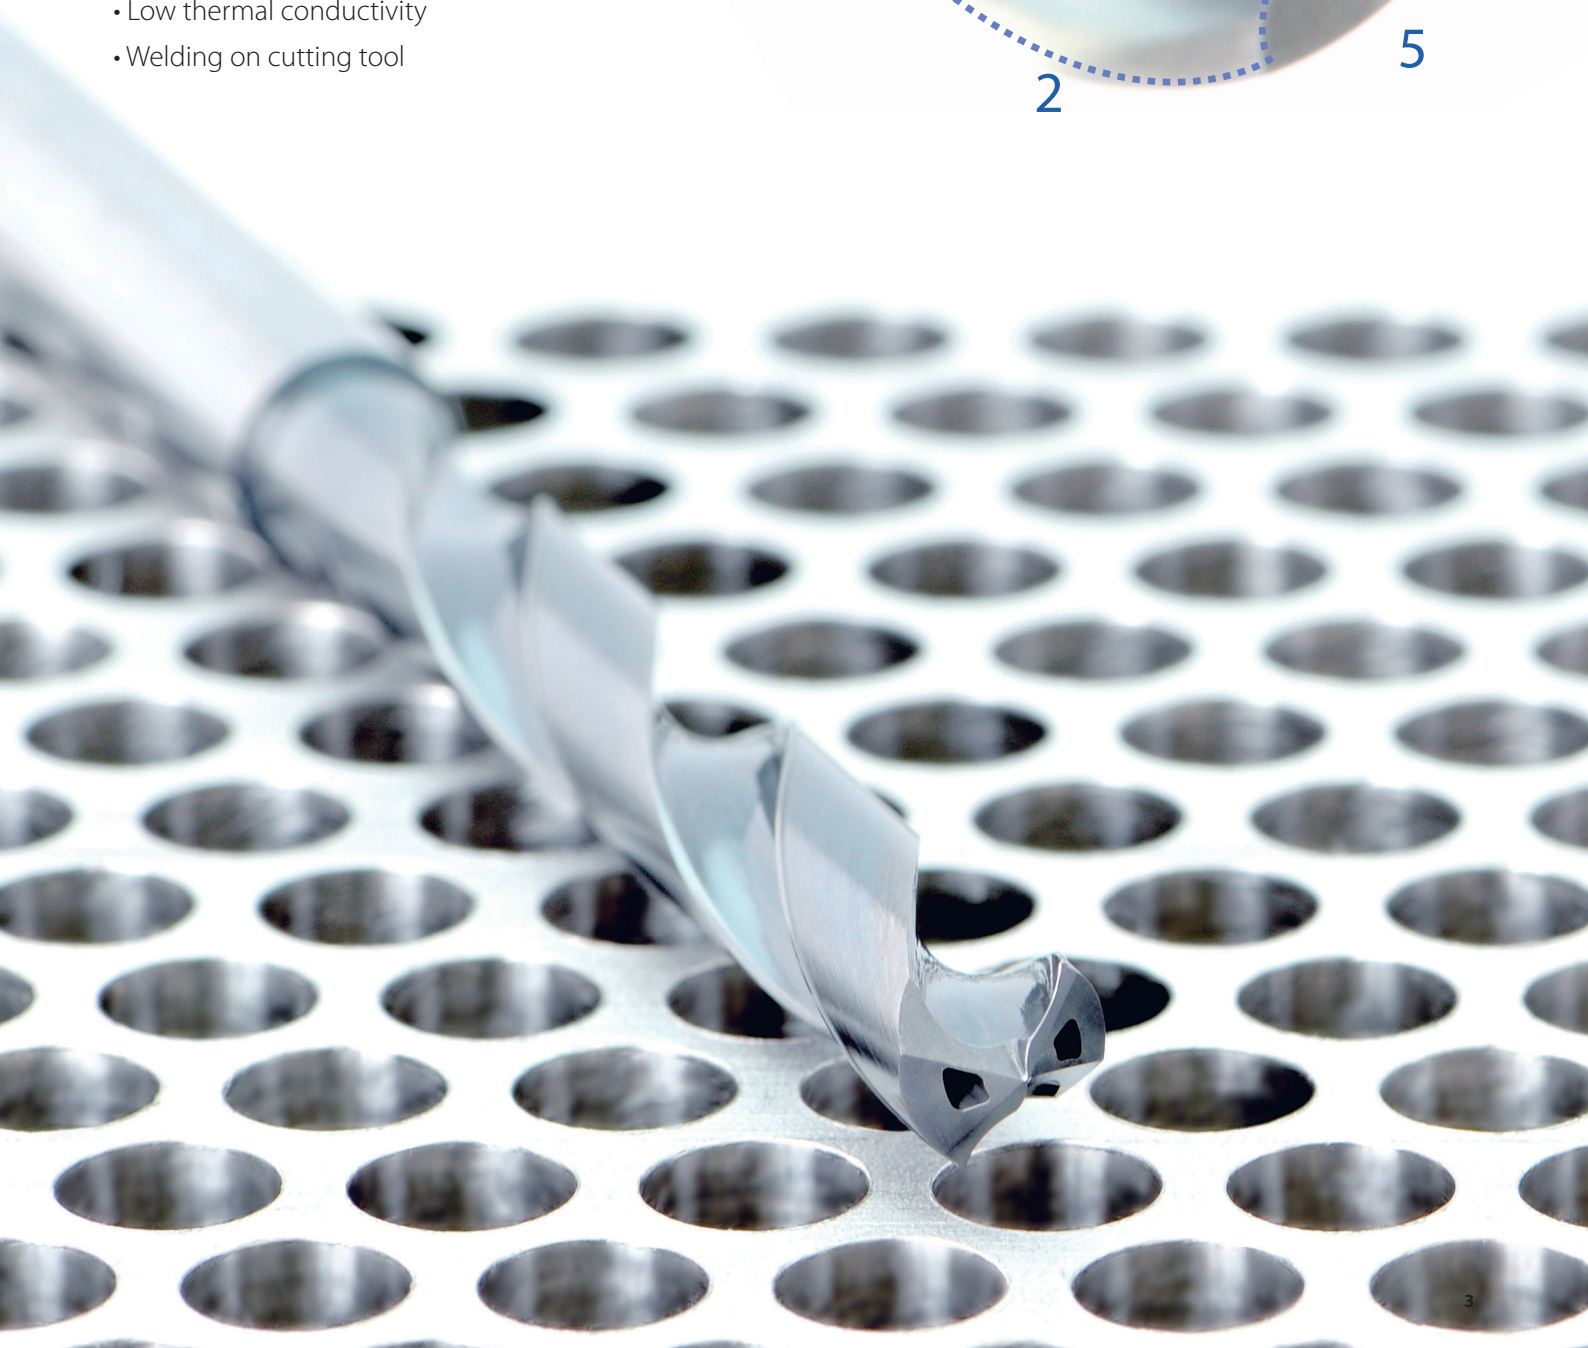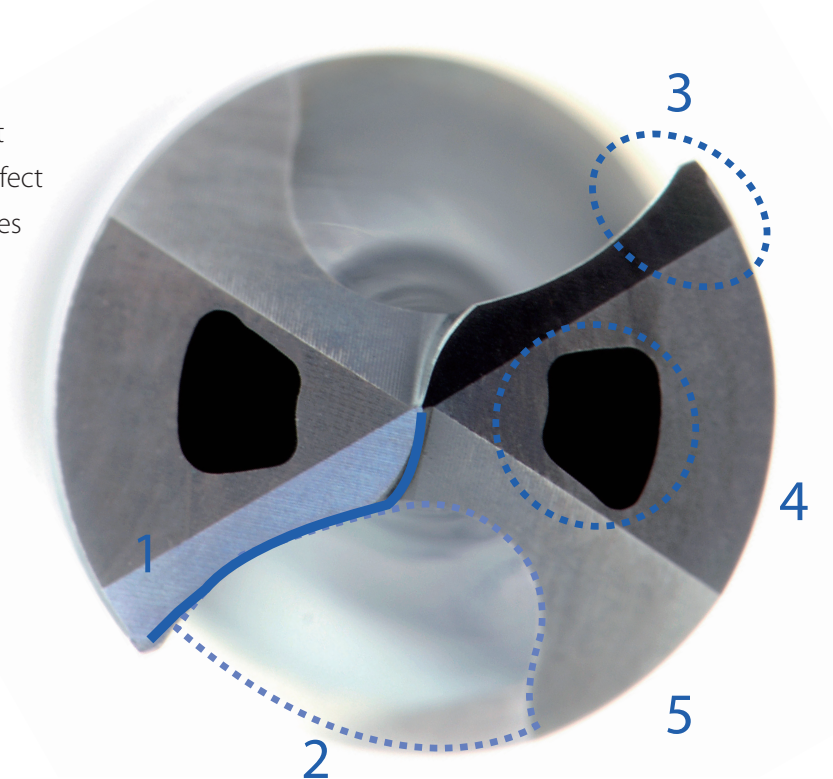


# KEY FEATURES & BENEFITS

## 1 Solution for work hardening - Sharp cutting edge

Reduces work hardening, which leads to longer tool life during tapping and reaming

Tool	ADO-SUS-5D φ10	Speed	70m/min (2,229min <sup>-1</sup> )	Coolant	1.5MPa Water Soluble Internal
Work Material	SUS3040C	Feed Rate	446mm/min(0.2mm/rev)	Machine	Horizontal Machining Center

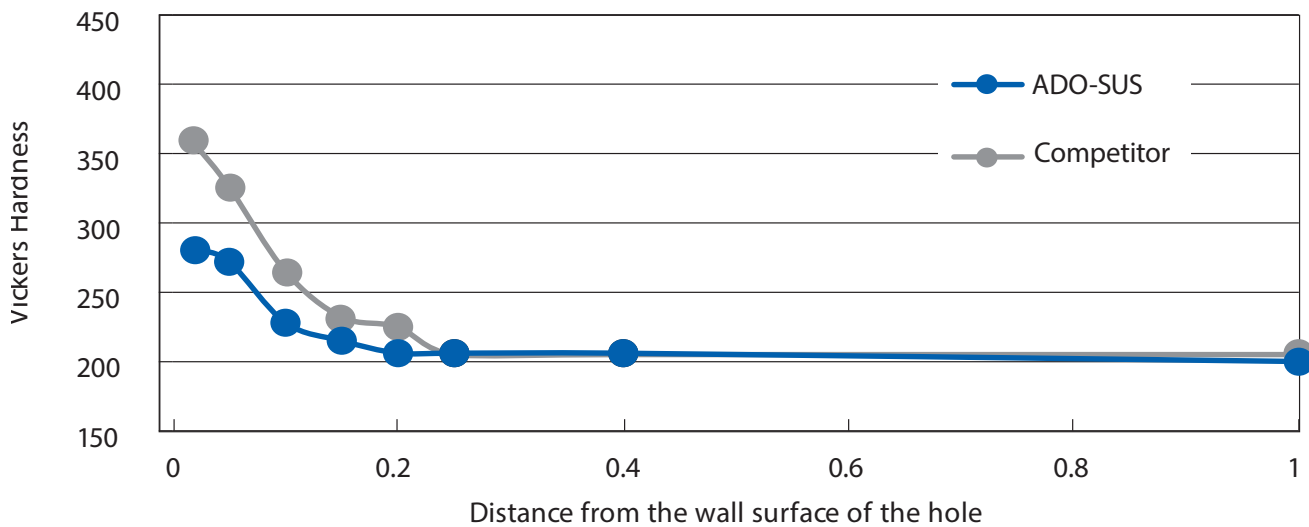

## 2 Solution for elongation of chips - New flute geometry


Enables the creation of compact cutting chips



# KEY FEATURES & BENEFITS


## 3 Solution for high machining heat - Special margin shape

Reduces friction and heat generation

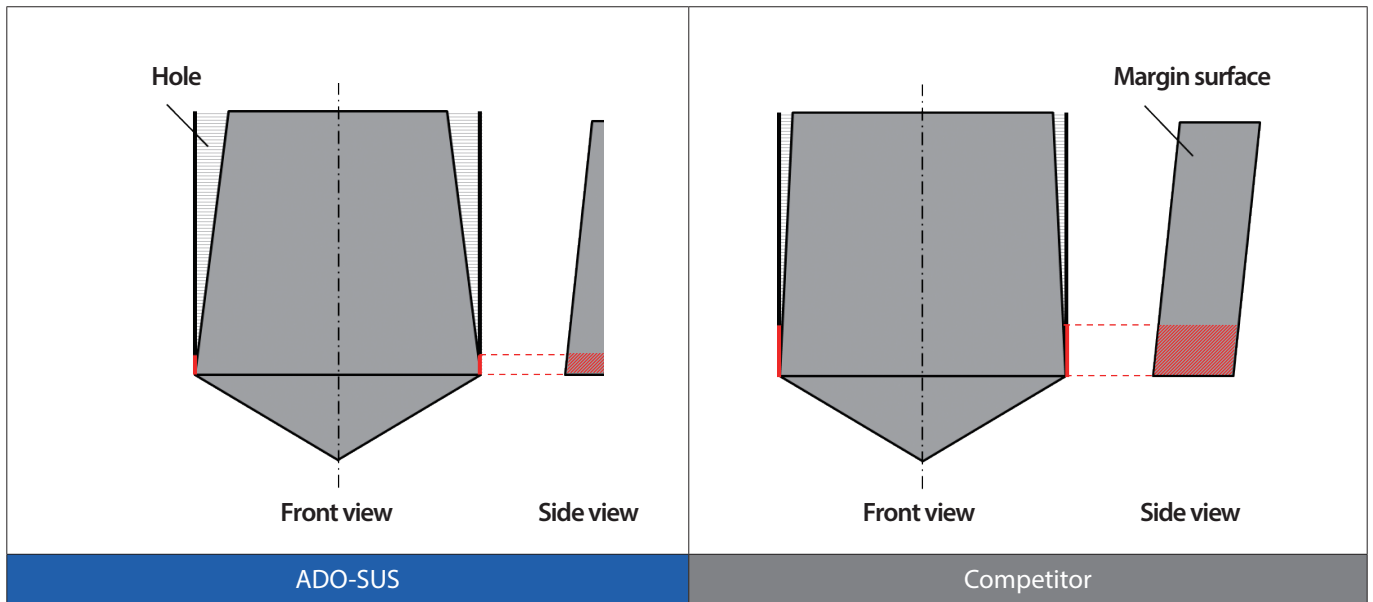

## 4 Solution for high machining heat - New coolant hole shape

Improves coolant flow, chip evacuation and cutting heat generation

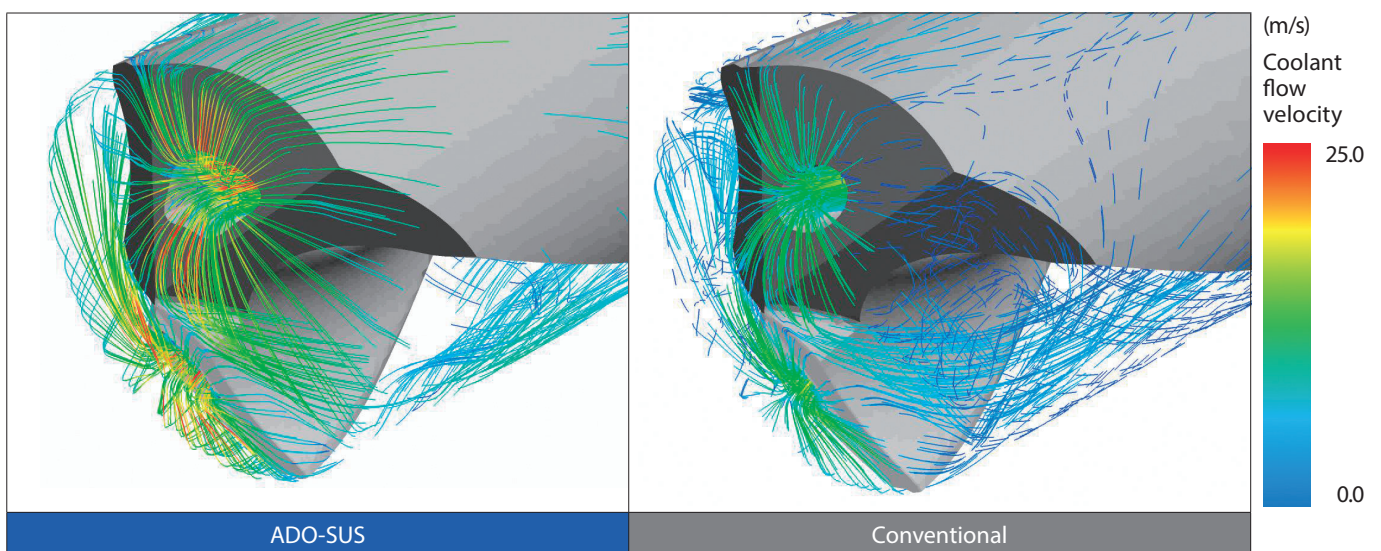


Analysis of coolant flow with spindle speed of 2,200min<sup>-1</sup>

## 5 Solution for welding - WXL<sup>®</sup> coating


High adhesion strength, which minimizes the possibility of chipping

# PERFORMANCE ADO-SUS-3D/5D VERSUS CONVENTIONAL TYPE IN STAINLESS STEEL

Cutting Dia	Ø6	Speed	80m/min	Depth of Hole	25mm (Through hole)
Material	SUS304 (1.4301)	Feed Rate	0,18mm/rev (3% x D)	Coolant	Internal - Emulsion - 1,5Mpa

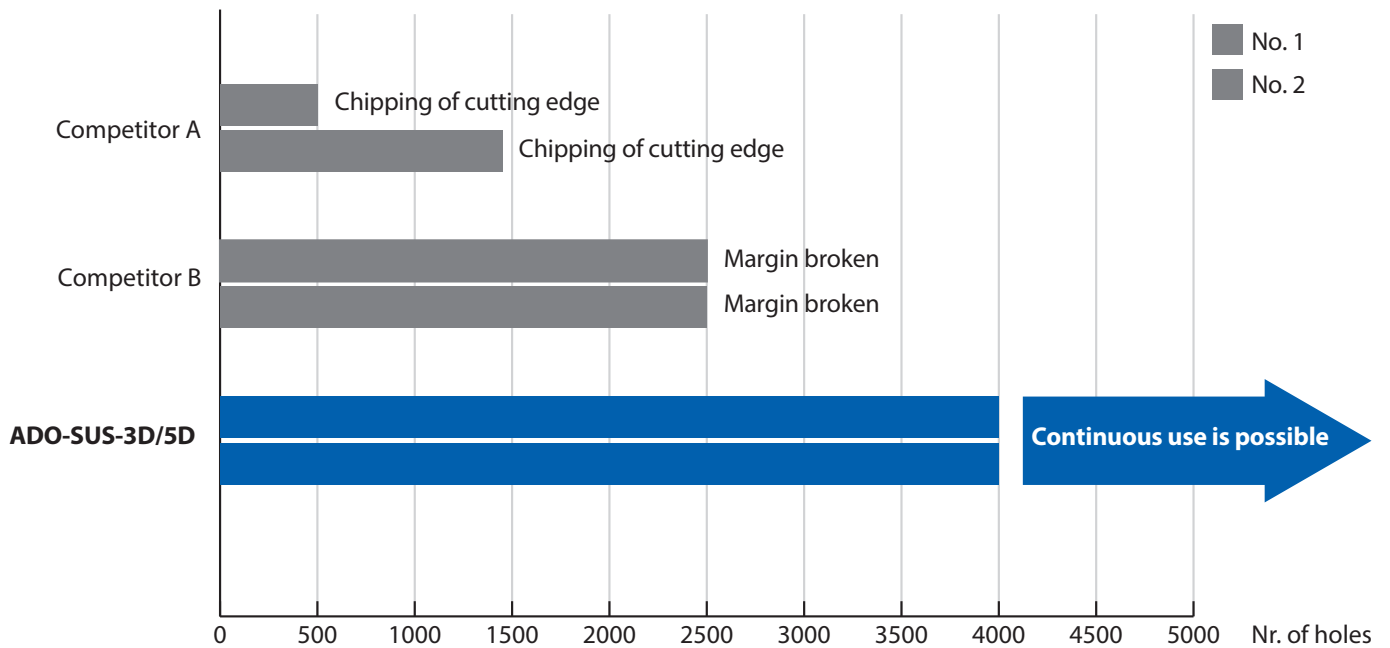


## CONVENTIONAL TYPE VERSUS ADO-SUS-3D/5D

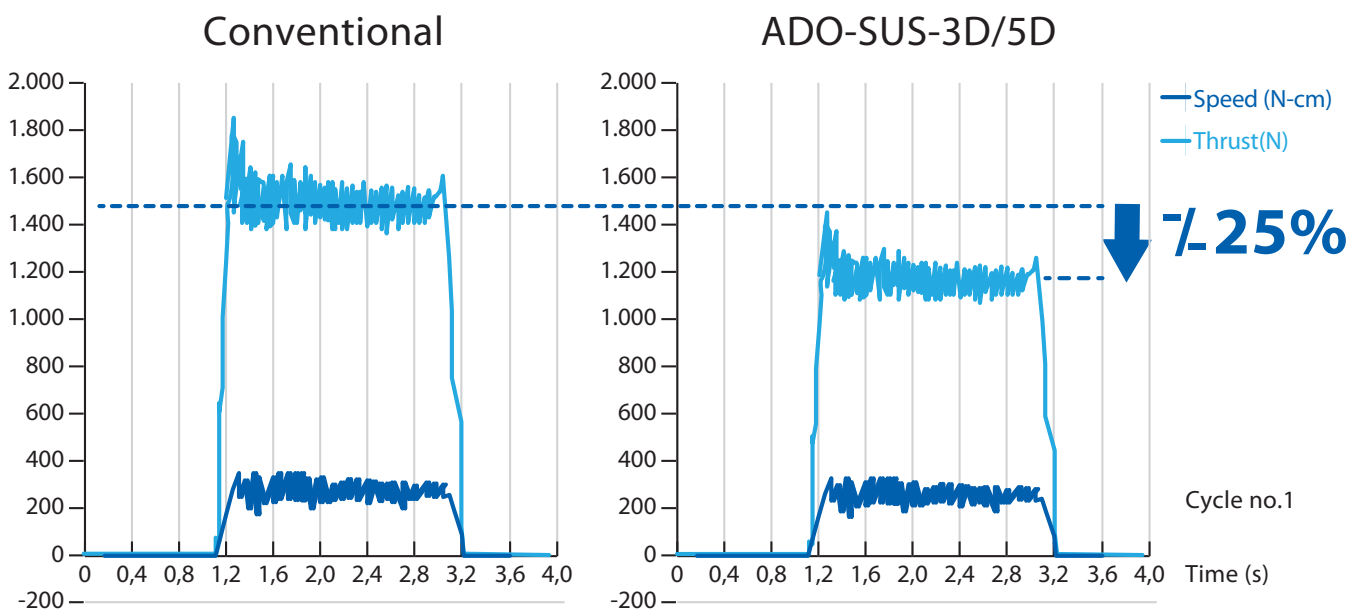

# PERFORMANCE ADO-SUS-3D/5D VERSUS CONVENTIONAL TYPE IN CARBON STEEL

Cutting Dia	Ø10	Speed	100m/min	Depth of Hole	50mm (Through hole)
Material	S50C (1.1213)	Feed Rate	0,30mm/rev (3% x D)	Coolant	Internal - Emulsion - 1,5Mpa

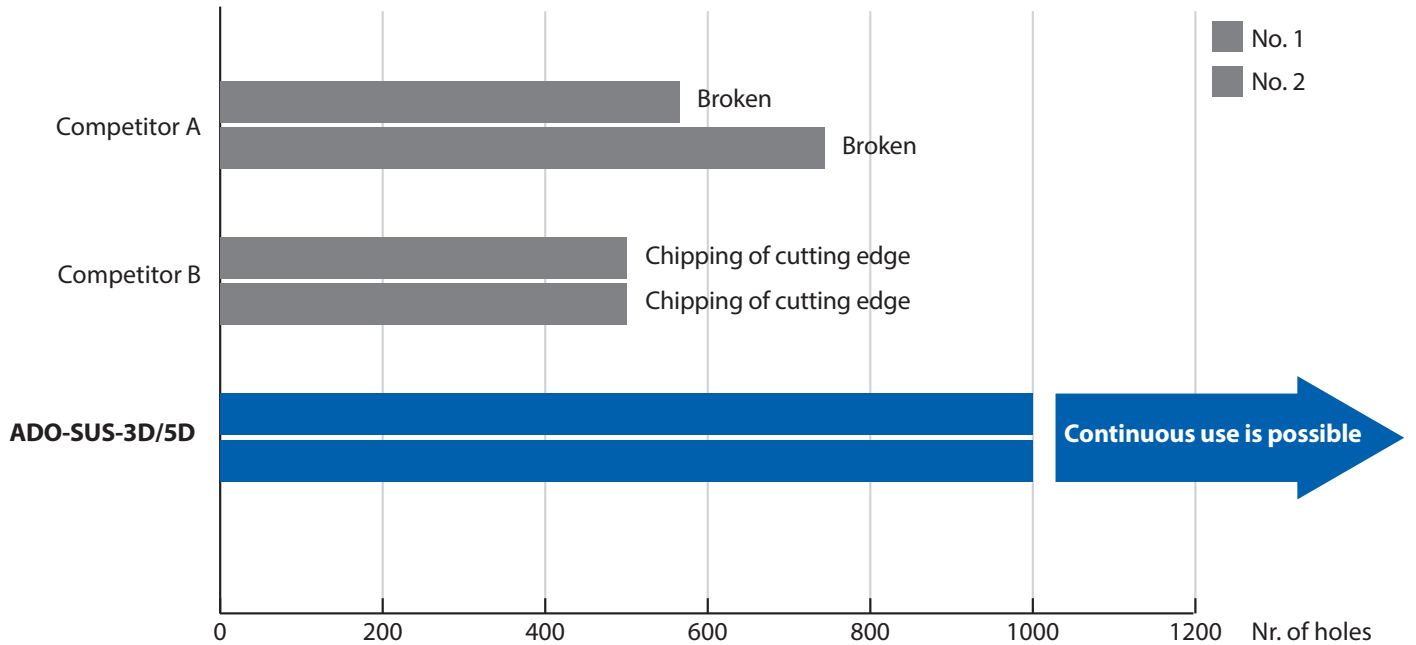


## CUTTING CONDITIONS ADO-SUS-3D/5D/8D

Vc	Carbon Steel S50C		Alloy Steel SCM440		Alloy Steel SCM440 · 30HRC		Stainless Steel SUS304 - SUS316		Super Duplex SUS630 · 17-4PH · 15-5PH		Ti Alloy	
	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
2	12.700	0,04~0,08	12.700	0,04~0,08	11.900	0,04~0,08	12.700	0,04~0,08	9.500	0,04~0,08	6.400	0,04~0,08
3	10.600	0,06~0,12	10.600	0,06~0,12	7.400	0,06~0,12	8.500	0,06~0,12	4.800	0,06~0,09	3.700	0,05~0,09
4	8.000	0,08~0,16	8.000	0,08~0,16	5.600	0,08~0,16	6.400	0,08~0,16	3.600	0,08~0,12	2.800	0,06~0,12
5	6.400	0,10~0,20	6.400	0,10~0,20	4.500	0,10~0,20	5.100	0,10~0,20	2.900	0,10~0,15	2.200	0,08~0,15
6	5.300	0,12~0,24	5.300	0,12~0,24	3.700	0,12~0,24	4.200	0,12~0,24	2.400	0,12~0,18	1.900	0,09~0,18
7	4.500	0,14~0,26	4.500	0,14~0,26	3.200	0,14~0,26	3.600	0,14~0,26	2.000	0,14~0,21	1.600	0,11~0,21
8	4.000	0,16~0,28	4.000	0,16~0,28	2.800	0,16~0,28	3.200	0,16~0,28	1.800	0,16~0,24	1.400	0,12~0,24
9	3.500	0,18~0,30	3.500	0,18~0,30	2.500	0,18~0,30	2.800	0,18~0,30	1.600	0,18~0,27	1.200	0,14~0,27
10	3.200	0,20~0,30	3.200	0,20~0,30	2.200	0,20~0,30	2.500	0,20~0,30	1.400	0,20~0,30	1.100	0,15~0,30
11	2.900	0,20~0,30	2.900	0,20~0,30	2.000	0,20~0,30	2.300	0,20~0,30	1.300	0,20~0,30	1.000	0,15~0,30
12	2.700	0,21~0,30	2.700	0,21~0,30	1.900	0,21~0,30	2.100	0,21~0,30	1.200	0,21~0,30	900	0,16~0,30
13	2.400	0,21~0,33	2.400	0,21~0,33	1.700	0,21~0,33	2.000	0,21~0,33	1.100	0,21~0,33	900	0,18~0,33
14	2.300	0,22~0,35	2.300	0,22~0,35	1.600	0,22~0,35	1.800	0,22~0,35	1.000	0,22~0,35	800	0,19~0,35
16	2.000	0,25~0,36	2.000	0,25~0,36	1.400	0,25~0,36	1.600	0,25~0,36	900	0,25~0,36	700	0,22~0,36
18	1.800	0,28~0,38	1.800	0,28~0,38	1.200	0,28~0,38	1.400	0,28~0,38	800	0,28~0,38	600	0,24~0,38
20	1.600	0,30~0,40	1.600	0,30~0,40	1.100	0,30~0,40	1.300	0,30~0,40	700	0,30~0,40	600	0,27~0,40

# MACHINING DATA OF STAINLESS STEEL


## Machining precipitation hardening Stainless Steel

Tool	ADO-SUS-5D	Competitor
Size	Ø 6,7	
Work Material	15-5 PH	
Cutting Speed	50m/min (2.377 min <sup>-1</sup> )	
Feed Rate	357 mm/min (0,15 mm/rev)	
Depth of Hole	45 mm (Blind)	
Coolant	Water Soluble (Internal)	
Machine	Horizontal Machining Center	

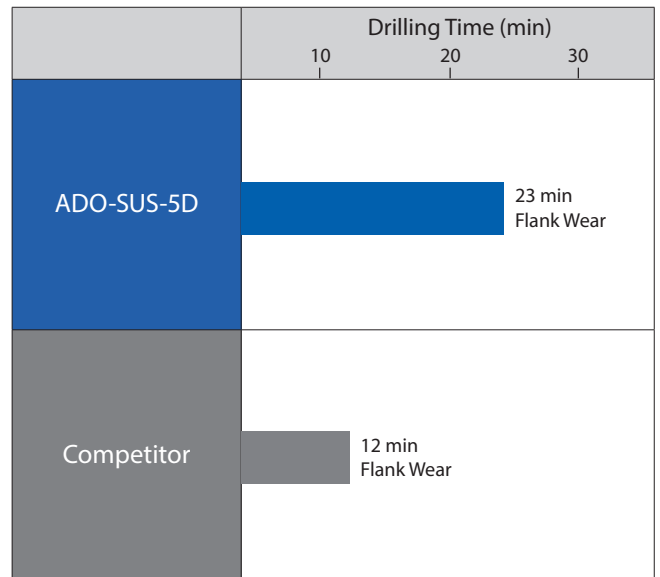

## Machining Duplex Stainless Steel

Tool	ADO-SUS-5D	Competitor
Size	Ø 10,3	
Work Material	SUS329J3L	
Cutting Speed	65m/min (2.010 min <sup>-1</sup> )	
Feed Rate	462 mm/min (0,23 mm/rev)	
Depth of Hole	48 mm (Through)	
Coolant	Water Soluble (Internal)	
Machine	Multifunction Lathe	

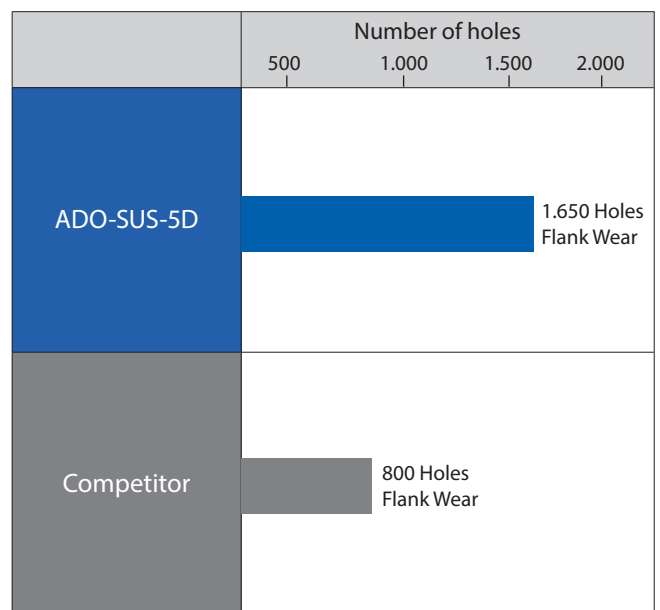




# MACHINING DATA OF TITANIUM ALLOY

## ADO-SUS-3D in Titanium Alloy

<b>Tool</b>	ADO-SUS-3D Ø 5,1
<b>Work Material</b>	Ti-6Al-4V (34~36 HRC) (After aging treatment)
<b>Cutting Speed</b>	40m/min (2.498 min <sup>-1</sup> )
<b>Feed Rate</b>	300 mm/min (0,12 mm/rev)
<b>Depth of Hole</b>	17 mm (Through)
<b>Coolant</b>	Water Soluble (Internal)
<b>Machine</b>	Horizontal Machining Center

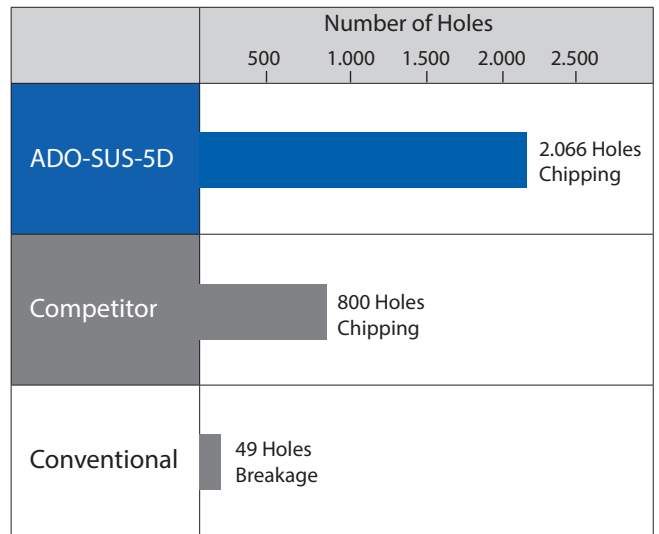


Cutting chips





## ADO-SUS-5D in Titanium Alloy

<b>Tool</b>	ADO-SUS-5D Ø 10,5
<b>Work Material</b>	Ti-6Al-4V
<b>Cutting Speed</b>	45m/min (1.365 min <sup>-1</sup> )
<b>Feed Rate</b>	177,5 mm/min (0,13 mm/rev)
<b>Depth of Hole</b>	29 mm (Blind)
<b>Coolant</b>	Water Soluble (Internal)
<b>Machine</b>	Horizontal Machining Center

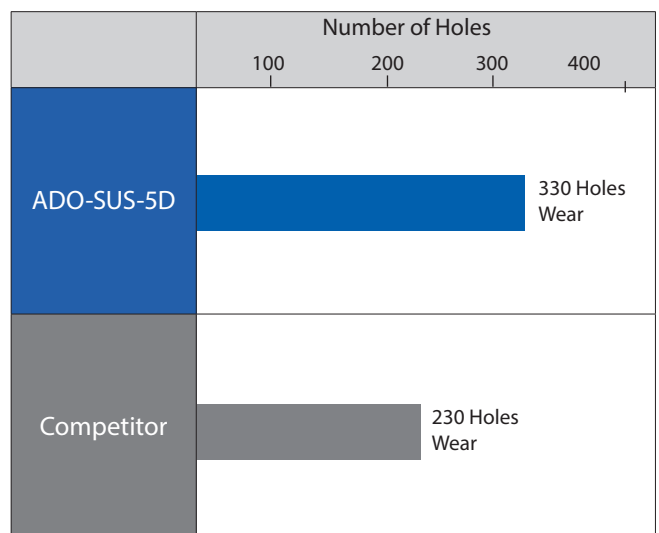

# ADO-SUS-3D NEW SIZES

Drilling | Solid carbide | 3xD



- First choice in quality and performance
- Carbide drill with internal coolant, WXL coating
- Up to 3xD
- Designed for stainless steel and titanium alloys
- 179 sizes

<b>P</b> C < 0,2%	<b>P</b> 0,25 < C < 0,4	<b>P</b> C ≥ 0,45%	<b>P</b> SCM	<b>M</b> INOX	<b>K</b> GG	<b>K</b> GGG	<b>N</b> AC, ADC	<b>S</b> Ti	<b>H</b> 25-35 HRC	<b>H</b> 35-45 HRC	<b>H</b> 45-52 HRC
----------------------	----------------------------	-----------------------	-----------------	------------------	----------------	-----------------	---------------------	----------------	-----------------------	-----------------------	-----------------------

<b>A</b>	<b>CARBIDE</b>	<b>WXL</b>	<b>30°</b>	<b>SHRINK FIT</b>	<b>140°</b>	<b>h8</b>
----------	----------------	------------	------------	-------------------	-------------	-----------





Drilling | Solid carbide

3xD

EDP	DC	LCF	OAL	DCON	EDP	DC	LCF	OAL	DCON
8665200	2	12	66	3	8680555	5,55	28	82	6
8665210	2,1	13	66	3	8665560	5,6	28	82	6
8665220	2,2	14	66	3	8665570	5,7	29	82	6
8665230	2,3	14	66	3	8665580	5,8	29	82	6
8665240	2,4	15	66	3	8665590	5,9	30	82	6
8665250	2,5	15	66	3	8665600	6	30	82	6
8665260	2,6	16	66	3	8680610	6,1	31	88	8
8665270	2,7	17	66	3	8680620	6,2	31	88	8
8665280	2,8	17	66	3	8680630	6,3	32	88	8
8665283	2,83	17	66	3	8680640	6,4	32	88	8
8665287	2,87	18	66	3	8680650	6,5	33	88	8
8665290	2,9	18	66	3	8680660	6,6	33	88	8
8665300	3	18	66	3	8680670	6,7	34	88	8
8665310	3,1	19	74	4	8680680	6,8	34	88	8
8665315	3,15	19	74	4	8680690	6,9	35	88	8
8665320	3,2	20	74	4	8680700	7	35	88	8
8665326	3,26	20	74	4	8665710	7,1	36	94	8
8665330	3,3	20	74	4	8665720	7,2	36	94	8
8665340	3,4	21	74	4	8665725	7,25	37	94	8
8665350	3,5	21	74	4	8665730	7,3	37	94	8
8665360	3,6	22	74	4	8665740	7,4	37	94	8
8665370	3,7	23	74	4	8680745	7,45	38	94	8
8665373	3,73	23	74	4	8665750	7,5	38	94	8
8665375	3,75	23	74	4	8680755	7,55	38	94	8
8665380	3,8	23	74	4	8665760	7,6	38	94	8
8665390	3,9	24	74	4	8665770	7,7	39	94	8
8665400	4	24	74	4	8665775	7,75	39	94	8
8680410	4,1	25	80	6	8665780	7,8	39	94	8
8680420	4,2	26	80	6	8665790	7,9	40	94	8
8680430	4,3	26	80	6	8665800	8	40	94	8
8680440	4,4	27	80	6	8680810	8,1	41	101	10
8680445	4,45	27	80	6	8680820	8,2	41	101	10
8680450	4,5	27	80	6	8680830	8,3	42	101	10
8680460	4,6	28	80	6	8680840	8,4	42	101	10
8680465	4,65	28	80	6	8680850	8,5	43	101	10
8680470	4,7	29	80	6	8680860	8,6	43	101	10
8680480	4,8	29	80	6	8680870	8,7	44	101	10
8665485	4,85	29	80	6	8680880	8,8	44	101	10
8680490	4,9	30	80	6	8680890	8,9	45	101	10
8680500	5	25	80	6	8680900	9	45	101	10
8665510	5,1	26	82	6	8665910	9,1	46	106	10
8665520	5,2	26	82	6	8665920	9,2	46	106	10
8665525	5,25	27	82	6	8665925	9,25	47	106	10
8665530	5,3	27	82	6	8665930	9,3	47	106	10
8665540	5,4	27	82	6	8665940	9,4	47	106	10
8665550	5,5	28	82	6	8665950	9,5	48	106	10

# ADO-SUS-3D NEW SIZES

Drilling | Solid carbide | 3xD



- First choice in quality and performance
- Carbide drill with internal coolant, WXL coating
- Up to 3xD
- Designed for stainless steel and titanium alloys
- 179 sizes



EDP	DC	LCF	OAL	DCON
8680955	9,55	48	106	10
8665960	9,6	48	106	10
8665970	9,7	49	106	10
8665975	9,75	49	106	10
8665980	9,8	49	106	10
8665990	9,9	50	106	10
8666000	10	50	106	10
8681010	10,1	51	113	12
8681020	10,2	51	113	12
8681030	10,3	52	113	12
8681040	10,4	52	113	12
8681050	10,5	53	113	12
8681060	10,6	53	113	12
8681070	10,7	54	113	12
8681080	10,8	54	113	12
8681090	10,9	55	113	12
8681100	11	55	113	12
8666110	11,1	56	120	12
8666120	11,2	56	120	12
8666130	11,3	57	120	12
8666140	11,4	57	120	12
8666150	11,5	58	120	12
8666160	11,6	58	120	12
8666170	11,7	59	120	12
8666180	11,8	59	120	12
8666190	11,9	60	120	12
8666200	12	60	120	12
8681210	12,1	61	128	14
8681220	12,2	61	128	14
8681230	12,3	62	128	14
8681240	12,4	62	128	14
8681250	12,5	63	128	14
8681260	12,6	63	128	14
8681270	12,7	64	128	14
8681280	12,8	64	128	14
8681290	12,9	65	128	14
8681300	13	65	128	14
8666310	13,1	66	134	14
8666320	13,2	67	134	14
8666330	13,3	68	134	14
8666340	13,4	67	134	14
8681343	13,43	68	134	14
8666350	13,5	68	134	14
8681355	13,55	68	134	14
8666360	13,6	68	134	14
8666370	13,7	69	134	14



EDP	DC	LCF	OAL	DCON
8666380	13,8	69	134	14
8666390	13,9	70	134	14
8666400	14	70	134	14
8681410	14,1	71	140	16
8681420	14,2	71	140	16
8681430	14,3	72	140	16
8681440	14,4	72	140	16
8681450	14,5	73	140	16
8681460	14,6	73	140	16
8681470	14,7	74	140	16
8681480	14,8	74	140	16
8681490	14,9	75	140	16
8681500	15	75	140	16
8666510	15,1	76	145	16
8666520	15,2	76	145	16
8666530	15,3	77	145	16
8666540	15,4	77	145	16
8666550	15,5	78	145	16
8681555	15,55	78	145	16
8666560	15,6	78	145	16
8666570	15,7	79	145	16
8666580	15,8	79	145	16
8666590	15,9	80	145	16
8666600	16	80	145	16
48350161	16,1	80	145	18
8681650	16,5	83	150	18
8681670	16,7	84	150	18
8681700	17	85	150	18
8681730	17,3	87	155	18
8666750	17,5	88	155	18
8681755	17,55	88	155	18
48350178	17,8	90	155	18
8666800	18	90	155	18
48350181	18,1	90	155	20
8681850	18,5	93	160	20
8681870	18,7	94	160	20
8681900	19	95	160	20
8681930	19,3	97	165	20
8666950	19,5	98	165	20
8681955	19,55	98	165	20
8667000	20	100	165	20

Drilling | Solid carbide 3xD



# ADO-SUS-5D NEW SIZES

Drilling | Solid carbide | 5xD



- First choice in quality and performance
- Carbide drill with internal coolant, WXL coating
- Up to 5xD
- Designed for stainless steel and titanium alloys
- 198 sizes

<b>P</b> C < 0,2%	<b>P</b> 0,25 < C < 0,4	<b>P</b> C ≥ 0,45%	<b>P</b> SCM	<b>M</b> INOX	<b>K</b> GG	<b>K</b> GGG	<b>N</b> AC, ADC	<b>S</b> Ti	<b>H</b> 25-35 HRC	<b>H</b> 35-45 HRC	<b>H</b> 45-52 HRC
-------------------	-------------------------	--------------------	--------------	---------------	-------------	--------------	------------------	-------------	--------------------	--------------------	--------------------

<b>A</b>	<b>CARBIDE</b>	<b>WXL</b>	<b>30°</b>	<b>SHRINK FIT</b>		<b>140°</b>	<b>h8</b>
----------	----------------	------------	------------	-------------------	--	-------------	-----------





Drilling | Solid carbide



EDP	DC	LCF	OAL	DCON	EDP	DC	LCF	OAL	DCON
8667200	2	18	70	3	8682490	4,9	45	95	6
8667210	2,1	19	70	3	8682500	5	45	95	6
48349215 <small>NEW</small>	2,15	20	70	3	8667510	5,1	41	100	6
8667220	2,2	20	70	3	8667520	5,2	42	100	6
48349225 <small>NEW</small>	2,25	21	70	3	8667530	5,3	43	100	6
8667230	2,3	21	70	3	8667540	5,4	44	100	6
48349235 <small>NEW</small>	2,35	22	70	3	8667550	5,5	44	100	6
8667240	2,4	22	70	3	8667552	5,52	45	100	6
8667250	2,5	23	70	3	8667554	5,54	45	100	6
48349255 <small>NEW</small>	2,55	24	70	3	8667560	5,6	45	100	6
8667260	2,6	24	78	3	8667570	5,7	46	100	6
8667270	2,7	25	78	3	8667580	5,8	47	100	6
8667276	2,76	25	78	3	8667590	5,9	48	100	6
8667278	2,78	26	78	3	8667600	6	48	100	6
8667280	2,8	26	78	3	8682610	6,1	49	109	8
8667283	2,83	26	78	3	8682620	6,2	50	109	8
8667287	2,87	26	78	3	8682630	6,3	51	109	8
8667290	2,9	27	78	3	8682640	6,4	52	109	8
8667300	3	27	78	3	8682650	6,5	52	109	8
8667310	3,1	28	86	4	8682660	6,6	53	109	8
8667315	3,15	29	86	4	8682670	6,7	54	109	8
8667320	3,2	29	86	4	8682680	6,8	55	109	8
8667326	3,26	29	86	4	8682690	6,9	56	109	8
8667330	3,3	30	86	4	8682700	7	56	109	8
48349335 <small>NEW</small>	3,35	31	86	4	8667710	7,1	57	118	8
8667340	3,4	31	86	4	8667720	7,2	58	118	8
8667350	3,5	32	86	4	8667725	7,25	58	118	8
8667360	3,6	33	86	4	8667730	7,3	59	118	8
8667366	3,66	33	86	4	8667736	7,36	59	118	8
8667368	3,68	34	86	4	8667738	7,38	60	118	8
8667370	3,7	34	86	4	8667740	7,4	60	118	8
8667373	3,73	34	86	4	8682745	7,45	60	118	8
8667375	3,75	34	86	4	8667750	7,5	60	118	8
8667380	3,8	35	86	4	8667752	7,52	61	118	8
8667390	3,9	36	86	4	8667754	7,54	61	118	8
8667400	4	36	86	4	8667760	7,6	61	118	8
8682410	4,1	37	95	6	8667770	7,7	62	118	8
8682420	4,2	38	95	6	8667775	7,75	62	118	8
8682430	4,3	39	95	6	8667780	7,8	63	118	8
8682440	4,4	40	95	6	8667790	7,9	64	118	8
8682445	4,45	41	95	6	8667800	8	64	118	8
8682450	4,5	41	95	6	8682810	8,1	65	128	10
8682460	4,6	42	95	6	8682820	8,2	66	128	10
8682464	4,64	42	95	6	8682830	8,3	67	128	10
8682470	4,7	43	95	6	8682840	8,4	68	128	10
8682480	4,8	44	95	6	8682850	8,5	68	128	10

# ADO-SUS-5D NEW SIZES

Drilling | Solid carbide | 5xD



- First choice in quality and performance
- Carbide drill with internal coolant, WXL coating
- Up to 5xD
- Designed for stainless steel and titanium alloys
- 198 sizes





EDP	DC	LCF	OAL	DCON
8682860	8,6	69	128	10
8682870	8,7	70	128	10
8682880	8,8	71	128	10
8682890	8,9	72	128	10
8682900	9	72	128	10
8667910	9,1	73	136	10
8667920	9,2	74	136	10
8667924	9,24	74	136	10
8667925	9,25	74	136	10
8667926	9,26	75	136	10
8667930	9,3	75	136	10
8667936	9,36	75	136	10
8667938	9,38	76	136	10
8667940	9,4	76	136	10
8667950	9,5	76	136	10
8667952	9,52	77	136	10
8667954	9,54	77	136	10
8667960	9,6	77	136	10
8667970	9,7	78	136	10
8667975	9,75	78	136	10
8667980	9,8	79	136	10
8667990	9,9	80	136	10
8668000	10	80	136	10
8683010	10,1	81	146	12
8683020	10,2	82	146	12
8683030	10,3	83	146	12
8683040	10,4	84	146	12
8683050	10,5	84	146	12
8683060	10,6	85	146	12
8683070	10,7	86	146	12
8683080	10,8	87	146	12
8683090	10,9	88	146	12
8683100	11	88	146	12
8668110	11,1	89	156	12
8668120	11,2	90	156	12
8668122	11,22	90	156	12
8668124	11,24	90	156	12
8668130	11,3	91	156	12
8668136	11,36	91	156	12
8668138	11,38	92	156	12
8668140	11,4	92	156	12
8668150	11,5	92	156	12
8668160	11,6	93	156	12
8668170	11,7	94	156	12
8668180	11,8	95	156	12
8668190	11,9	96	156	12

EDP	DC	LCF	OAL	DCON
8668200	12	96	156	12
8683210	12,1	97	167	14
8683220	12,2	98	167	14
8683230	12,3	99	167	14
8683240	12,4	100	167	14
8683250	12,5	100	167	14
8683260	12,6	101	167	14
8683270	12,7	102	167	14
8683280	12,8	103	167	14
8683290	12,9	104	167	14
8683300	13	104	167	14
8668310	13,1	105	176	14
8668320	13,2	106	176	14
8668325	13,25	106	176	14
8668330	13,3	107	176	14
8668340	13,4	108	176	14
8683343	13,43	108	176	14
8668350	13,5	108	176	14
8683355	13,55	109	176	14
8668360	13,6	109	176	14
8668370	13,7	110	176	14
8668380	13,8	111	176	14
8668390	13,9	112	176	14
8668400	14	112	176	14
8683410	14,1	113	185	16
8683420	14,2	114	185	16
8683430	14,3	115	185	16
8683440	14,4	116	185	16
8683450	14,5	116	185	16
8683460	14,6	117	185	16
8683470	14,7	118	185	16
8683480	14,8	119	185	16
8683490	14,9	120	185	16
8683500	15	120	185	16
8668510	15,1	121	193	16
8668520	15,2	122	193	16
8668525	15,25	122	193	16
8668530	15,3	123	193	16
8668540	15,4	124	193	16
8668550	15,5	124	193	16
8683555	15,55	125	193	16
8668560	15,6	125	193	16
8668570	15,7	126	193	16
8668580	15,8	127	193	16
8668590	15,9	128	193	16
8668600	16	128	193	16



# ADO-SUS-8D

Drilling | Solid carbide | 8xD



- First choice in quality and performance
- Carbide drill with internal coolant, WXL coating
- Up to 8xD
- Designed for stainless steel and titanium alloys
- 101 sizes



EDP	DC	LCF	OAL	DCON	EDP	DC	LCF	OAL	DCON
8686200	2	22	75	3	8684660	6,6	73	125	8
8686210	2,1	24	75	3	8684670	6,7	74	125	8
8686220	2,2	25	75	3	8684680	6,8	75	125	8
8686230	2,3	26	75	3	8684690	6,9	76	125	8
8686240	2,4	27	75	3	8684700	7	77	125	8
8686250	2,5	28	75	3	8684710	7,1	78	140	8
8686260	2,6	29	80	3	8684720	7,2	79	140	8
8686270	2,7	30	80	3	8684730	7,3	80	140	8
8686280	2,8	31	80	3	8684740	7,4	81	140	8
8686290	2,9	32	80	3	8684750	7,5	83	140	8
8686300	3	33	80	3	8684760	7,6	84	140	8
8684310	3,1	34	95	4	8684770	7,7	85	140	8
8684320	3,2	35	95	4	8684780	7,8	86	140	8
8684330	3,3	36	95	4	8684790	7,9	87	140	8
8684340	3,4	37	95	4	8684800	8	88	140	8
8684350	3,5	39	95	4	8684810	8,1	89	150	10
8684360	3,6	40	95	4	8684820	8,2	90	150	10
8684370	3,7	41	95	4	8684830	8,3	91	150	10
8684380	3,8	42	95	4	8684840	8,4	92	150	10
8684390	3,9	43	95	4	8684850	8,5	94	150	10
8684400	4	44	95	4	8684860	8,6	95	150	10
8684410	4,1	45	105	6	8684870	8,7	96	150	10
8684420	4,2	46	105	6	8684880	8,8	97	150	10
8684430	4,3	47	105	6	8684890	8,9	98	150	10
8684440	4,4	48	105	6	8684900	9	99	150	10
8684450	4,5	50	105	6	8684910	9,1	100	160	10
8684460	4,6	51	105	6	8684920	9,2	101	160	10
8684470	4,7	52	105	6	8684930	9,3	102	160	10
8684480	4,8	53	105	6	8684940	9,4	103	160	10
8684490	4,9	54	105	6	8684950	9,5	105	160	10
8684500	5	55	105	6	8684960	9,6	106	160	10
8684510	5,1	56	115	6	8684970	9,7	107	160	10
8684520	5,2	57	115	6	8684980	9,8	108	160	10
8684530	5,3	58	115	6	8684990	9,9	109	160	10
8684540	5,4	59	115	6	8685000	10	110	160	10
8684550	5,5	61	115	6	8685010	10,1	111	182	12
8684560	5,6	62	115	6	8685020	10,2	112	182	12
8684570	5,7	63	115	6	8685030	10,3	113	182	12
8684580	5,8	64	115	6	8685040	10,4	114	182	12
8684590	5,9	65	115	6	8685050	10,5	116	182	12
8684600	6	66	115	6	8685060	10,6	117	182	12
8684610	6,1	67	125	8	8685070	10,7	118	182	12
8684620	6,2	68	125	8	8685080	10,8	119	182	12
8684630	6,3	69	125	8	8685090	10,9	120	182	12
8684640	6,4	70	125	8	8685100	11	121	182	12
8684650	6,5	72	125	8	8685110	11,1	122	194	12

Drilling | Solid carbide



8xD







[www.osgeurope.com](http://www.osgeurope.com)



## SWEDEN

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö  
Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

## OSG SCANDINAVIA

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde  
Denmark  
Tel: +45 46 75 65 55  
osg@osg-scandinavia.com

## OSG NETHERLANDS

Bedrijfsweg 5  
3481 MG Harmelen  
The Netherlands  
Tel: +31 348 44 2764  
info@osg-nl.com

## OSG UK

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton  
United Kingdom  
Tel: +44 (0) 1827 720 013  
uk\_sales@osg-uk.com

## OSG EUROPE LOGISTICS

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 07  
info@osgeurope.com

## OSG BELUX

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 11  
info@osg-belgium.com

## OSG IBÉRICA

Bekolarra 4  
E - 01010 Vitoria-Gasteiz  
Spain  
Tel: +34 945 242 400  
osg.iberica@osg-ib.com

## OSG FRANCE

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte  
France  
Tel: +33 1 49 90 10 10  
sales@osg-france.com

## OSG ITALY

Via Ferrero, 65 A/B  
I - 10098 Rivoli  
Italy  
Tel: +39 0117705211  
info@osg-italia.it



# OSG IN EUROPE

## CZECH REPUBLIC, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.  
Slovakia, organizačná zložka  
Račianska 22/A, Bratislava 831 02  
Slovakia  
Tel.: +421 24 32 91 295  
info@osgeurope.com

## OSG POLAND

ul. Spółdzielcza 57  
05-074 Halinów  
Polska  
Tel: +22 760 82 71  
Mob. +48 570 677 711  
osg@osg-poland.com

## OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)  
051431 Bucuresti  
România  
Tel: +40 21 322 07 47  
info@osgromania.ro

## OSG TURKEY

Rami Kışla Cad.No:56 Eyüp  
Istanbul 34056  
Turkey  
Tel: +90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

## Vischer & Bolli AG

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
Switzerland  
Tel.: +41 44 802 15 15  
info@vb-tools.com

## OSG GERMANY

Karl-Ehmann-Str. 25  
D - 73037 Göppingen  
Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de



*shaping your dreams*

**OSG EUROPE LOGISTICS**

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 07  
info@osgeurope.com

**OSG POLAND Sp. z o.o.**

Spółdzielcza 57  
05-074 Halinów - Poland  
Tel: +22 760 82 71  
osg@osg-poland.com

**OSG ROMANIA SRL**

25C, Bucuresti-Magurele Street (Sector 5)  
051431 Bucuresti - România  
Tel: +40 21 322 07 47  
info@osgromania.ro

**OSG BELUX**

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 11  
info@osg-belgium.com

**OSG GERMANY**

Karl-Ehmann-Str. 25  
D - 73037 Göppingen - Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de

**AUSTRIA**

Branch office of OSG GERMANY  
Messestraße 11  
A-6850 Dornbirn  
Tel: +49 7161 6064-0  
info@osg-germany.de

**OSG FRANCE**

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte - France  
Tel: +33 1 49 90 10 10  
sales@osg-france.com

**OSG SCANDINAVIA**

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde - Denmark  
Tel: +45 46 75 65 55  
osg@osg-scandinavia.com

**OSG ITALIA**

Via Ferrero, 65 A/B3  
I - 10098 Rivoli - Italy  
Tel: +39 0117705211  
info@osg-italia.it

**OSG NETHERLANDS**

Bedrijfsweg 5 - 3481 MG Harmelen  
Tel: +31 348 44 2764  
info@osg-nl.com

**SWEDEN**

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö - Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

**Vischer & Bolli AG**

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
T +41 44 802 15 15  
info@vb-tools.com

**OSG UK**

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton, United Kingdom.  
Tel: +44 1827 720 013  
uk\_sales@osg-uk.com

**OSG IBERICA**

Bekolarra 4  
E - 01010 Vitoria-Gasteiz - Spain  
Tel: +34 945 242 400  
osg.iberica@osg-ib.com

**CZECH, SLOVAKIA, HUNGARY**

OSG Europe Logistics S.A.  
Slovakia organizacna zlozka  
Racianská 22/A, SK-83102 Bratislava  
Slovakia  
Tel. +421 24 32 91 295  
Orders-osgsvk@osgeurope.com

**OSG TURKEY**

Rami Kışla Cad.No:56 Eyüp  
Istanbul 34056 - Turkey  
Tel+90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

**OSG EUROPE LOGISTICS S.A.**

01/2022 - All rights reserved. © OSG Europe 2022

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

[www.osgeurope.com](http://www.osgeurope.com)

