



Endmills for milling built-up of welding parts

# ADDITIVE MANUFACTURING

AM-EBT · AM-CRE · AM-HFC · PXHF-AM

Volume 3



High Feed Radius Type:  
9 new items - Ø4~ Ø20

# INDEX

Features of Durorey coating ..... PAGE 3  
 Cutting Data ..... PAGE 4

## AM-EBT Ball Type

Features ..... PAGE 6  
 Cutting Data.....PAGE 7



Dimensions.....PAGE 8  
 Cutting Conditions .....PAGE 9

## AM-CRE Radius Type

Features .....PAGE 10  
 Cutting Data.....PAGE 11



Dimensions.....PAGE 12  
 Cutting Conditions .....PAGE 13

## AM-HFC High Feed Radius Type

Features .....PAGE 14  
 Cutting Data.....PAGE 16



Dimensions.....PAGE 18  
 Cutting Conditions .....PAGE 19

## PXHF-AM Exchangeable Head End Mill

Dimensions .....PAGE 21  
 Straight Shank Holder for PXM .....PAGE 22




Collet for PXM Exchangeable Head End Mill.....PAGE 25  
 Cutting Conditions .....PAGE 27

Milling | Additive manufacturing

## What is Additive Manufacturing?

In contrast to subtractive manufacturing processes such as cutting, where an object is formed by removing excessive materials, "additive manufacturing" deposits materials layer upon layer by metal 3D printing to create an object. By utilizing 3D data, short delivery and low production cost are made possible.

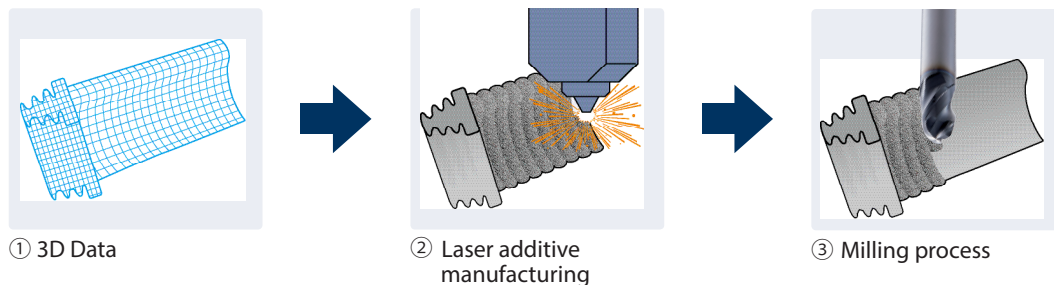


The name Additive Manufacturing was established in 2009 by the American Society for Testing and Materials (ASTM).

# FEATURES OF DUROREY COATING

## DUROREY coating enables superior heat resistance and high toughness optimized for high-hardness steel milling

Super heat resistant layer and ultra-fine periodic nano-layered structure provide superior toughness while maintaining high heat resistance and abrasion resistance. Also suppresses chipping even in high-hardness milling and achieves long tool life.

### Coating Structure

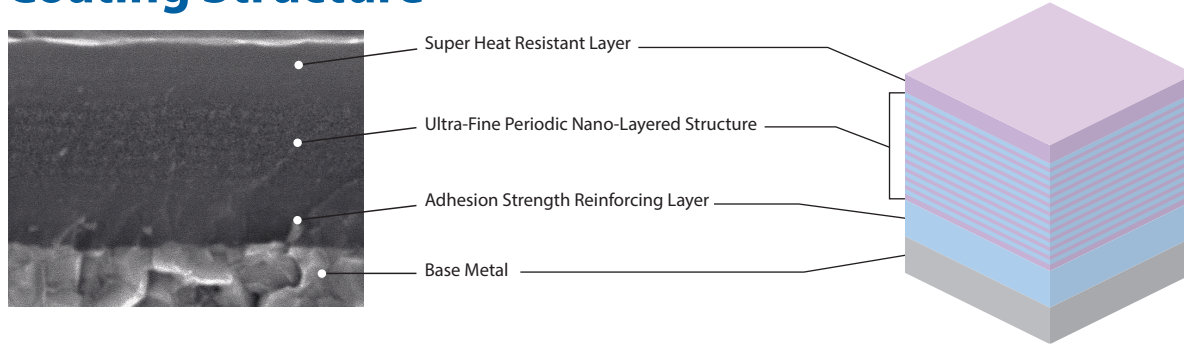

### Super Heat Resistant Layer

Smoothing of surface, high toughness and adhesion resistance due to the SiC containing ultra-heat-resistance material and crystal miniaturization

### Ultra-Fine Periodic Nano-Layered Structure

Crystal miniaturization and improvement of mechanical properties due to the laminated structure of periodic nano-layer and wear-resistant layer

Coating Color	Coating Structure	(GPa) Hardness	Oxidation Temperature (C°)	Heat Resistance	Adhesion Strength	Surface roughness	Wear Resistance	Welding Resistance	Toughness
Black Grey	Ultra-Fine Periodic Nano-Layered	41	1.300	☆	◎	○	☆	◎	○

(Good) ○ → ◎ → ☆ (Best)


### Characteristics of Additive Manufacturing Part

- The surface is very hard
- Large fluctuations in the part to be removed by cutting (cutting allowance)

### Required Tool Specifications

- Ability to withstand the hardness of the surface
- Ability to respond to fluctuations in cutting allowance

### Additive Manufacturing Part

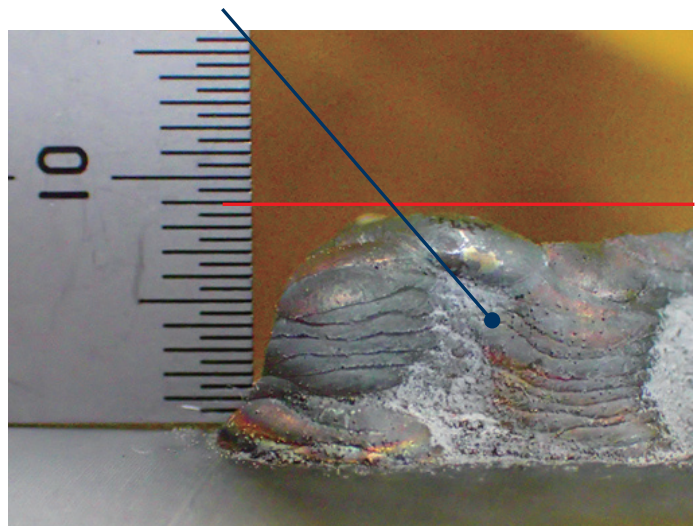

# CUTTING DATA

## High efficiency milling by the AM-EBT in additive manufacturing part with high-hardness and unequal cutting allowance

### Machining of propeller wing additive part

Work Material: SUS630 (34HRC)

Machine: Five-axis Machining Center




Main Spindle: HSK-A63

Maximum RPM: 20.000min<sup>-1</sup>

Holder: Shrink Fit

Coolant: MQL\*

\*MQL is used for filming purposes

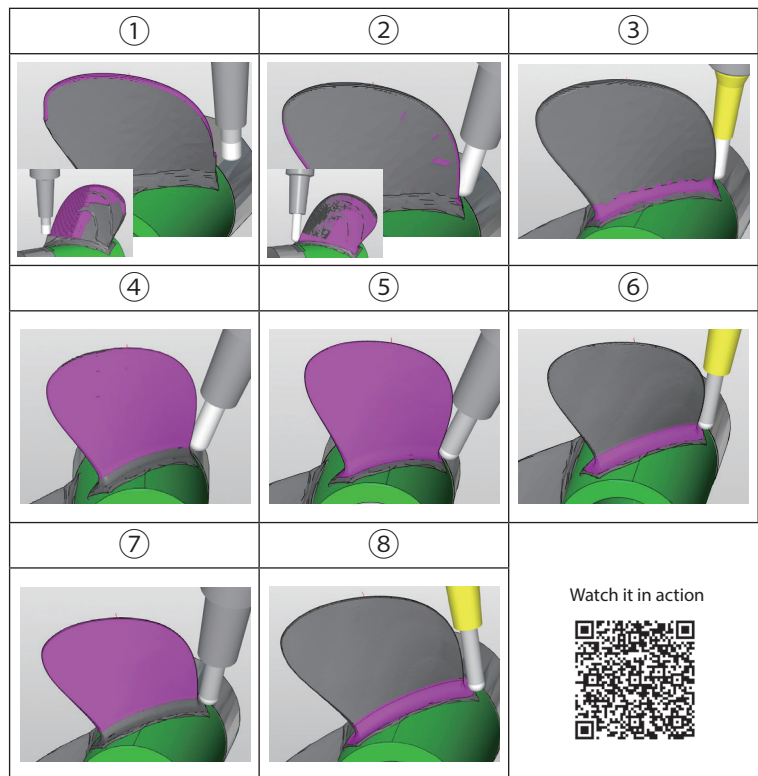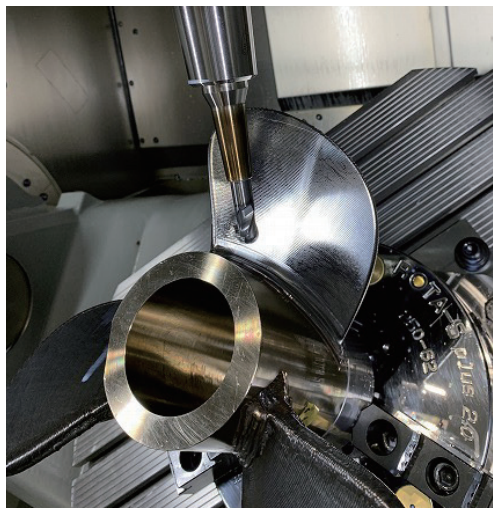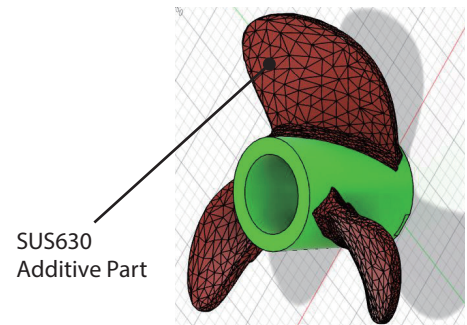

Total machining time: approximately 12 hours / wing(ATC tool change time not included)

Process	Milling Part	Milling Process	Tool	Cutting Speed (m/min)	Feed (mm/min)	ap (mm)	ae (mm)	Machining Time(hr)
①	Overall	Roughing	NEO-CR-PHS Ø16×R2	60 (1.194min <sup>-1</sup> )	239 (0,05mm/t)	1	3	1:40
②	Wing Surface	Roughing	AM-EBT R8×16	60 (1.194min <sup>-1</sup> )	179 (0,05mm/t)	1	3,5	2:30
③	Wing Surface	Semi-roughing	AM-EBT R8×16	60 (1.194min <sup>-1</sup> )	179 (0,05mm/t)	1	1	2:30
④	Base of Wing	Roughing	AM-EBT R6×12	60 (1.592min <sup>-1</sup> )	239 (0,05mm/t)	0,5	2	0:20
⑤	Wing Surface	Semi-finishing	WXL-EBD R8×30	70 (1.393min <sup>-1</sup> )	334 (0,12mm/t)	0,5	1	2:20
⑥	Base of Wing	Semi-finishing	WXL-EBD R6×18	60 (1.592min <sup>-1</sup> )	382 (0,12mm/t)	0,5	0,5	0:10
⑦	Wing Surface	Finishing	WXL-EBD R8×30	70 (1.393min <sup>-1</sup> )	334 (0,12mm/t)	0,5	0,5	2:20
⑧	Base of Wing	Finishing	WXL-EBD R6×18	70 (1.857min <sup>-1</sup> )	446 (0,12mm/t)	0,5	0,5	0:10

## AM-HFC enables highly efficient milling of Inconel additive material with unequal cutting allowance

### Milling of blade wing additive part

Work Material: Inconel 718 Additive Material

Machine: Five-axis Machining Center

Main Spindle: BT50


Maximum RPM: 12.000min<sup>-1</sup>

Holder: Shrink Fit



Coolant: Water-Soluble

### Shape of Work Material

Before Machining

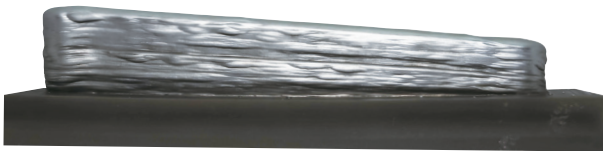

After Machining

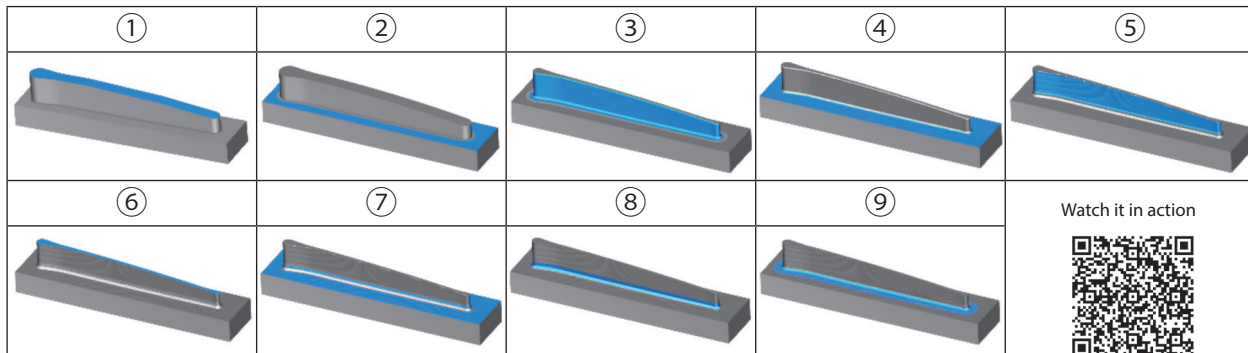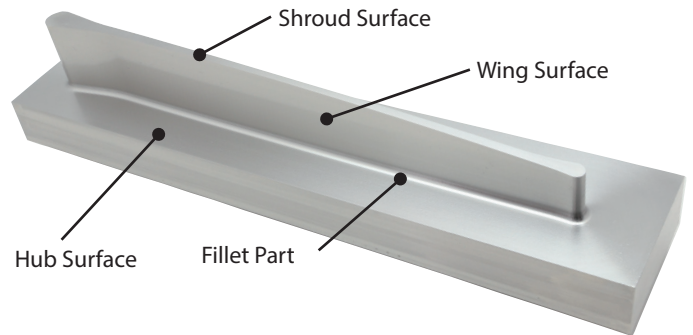

Total machining time: approximately 6 hours (ATC tool change time not included)

Process	Milling Part	Milling Process	Tool	Cutting Speed (m/min)	Feed (mm/min)	ap (mm)	ae (mm)	Machining Time(hr)
①	Shroud Surface	Roughing	AM-HFC 12xR1.5	60 (1,591min <sup>-1</sup> )	1,146 (0.12mm/t)	0.3	4.5	0:46
②	Hub Surface	Roughing						0:24
③	Wing Surface	Roughing						0:54
④	Hub Surface	Semi-roughing	AM-HFC 12xR1.5	60 (1,591min <sup>-1</sup> )	1,146 (0.12mm/t)	0.3	4.5	0:04
⑤	Wing Surface	Finishing	AM-EBT R5x10	45 (1,432min <sup>-1</sup> )	430 (0.1mm/t)	0.1	0.45	1:37
⑥	Shroud Surface	Finishing						1:16
⑦	Hub Surface	Finishing	AM-EBT R3x6	40 (2,068min <sup>-1</sup> )	620 (0.1mm/t)	0.1	0.45	0:15
⑧	Fillet Part	Finishing						0:12
⑨	Fillet Part	Finishing						0:25



## KEY FEATURES: AM-EBT

### Ball end mill that can accommodate large fluctuations in cutting allowance



- 1** Three-dimensional negative geometry that achieves both rigidity and sharpness
  - Compatible with hard additive manufacturing parts
  - Corresponds to fluctuations in cutting allowance

- 2** Large chip pocket
  - Corresponds to fluctuation in chip volume
  - Good chip evacuation

- 3** Flute specification that allows regrinding


- 4** DUROREY coating optimized for high-hardness steel machining

# CUTTING DATA



## Long tool life even in milling of built-up welding parts with large depth of cut

Tool	AM-EBT R6X12	Conventional 2-flute ball end mill
Work Material	BK-660R	
Milling Method	Linear Machining	
Cutting Speed	37 m/min (1.000 min <sup>-1</sup> )	
Feed	1.000 mm/min (0,33 mm/t)	666 mm/min (0,33 mm/t)
Depth of Cut	ap=3 mm Pf=0,5 mm	
Coolant	Air Blow	
Machine	Vertical Machining Center	

AM-EBT After milling 25m

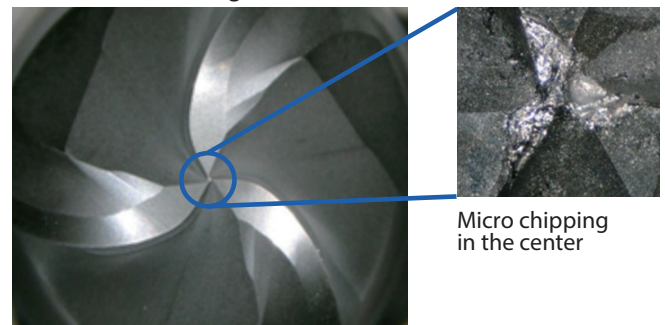


Conventional - 2 flutes ball end mill After milling 0,7m

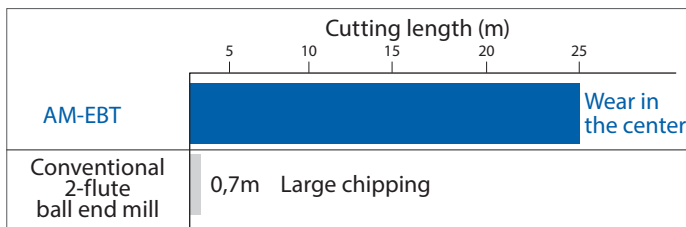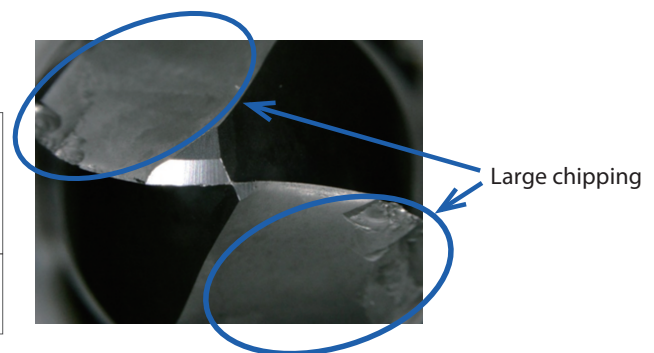


## Machining example with high-hardness additive material

Stable wear transition and good machined surface without peeling

Tool	AM-EBT R3X6
Work Material	Additive High-speed Steel DAP540MOD (66 HRC)
Milling Method	Pick milling (direction perpendicular to the deposited direction)
Cutting Speed	90 m/min (4.800 min <sup>-1</sup> )
Feed	1.340 mm/min (0,093 mm/t)
Depth of Cut	ap=0,3 mm Pf=0,9 mm
Coolant	Air Blow
Machine	Horizontal Machining Center (HSK63)

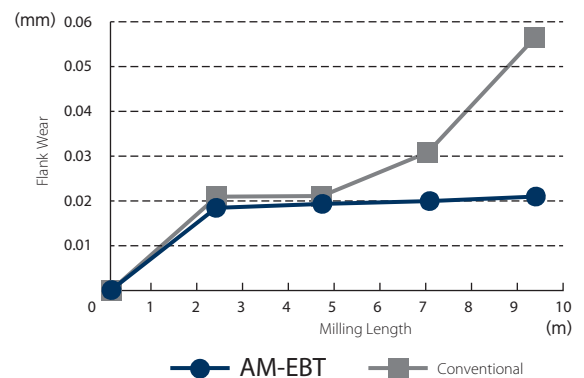

Condition after milling 9,38 m

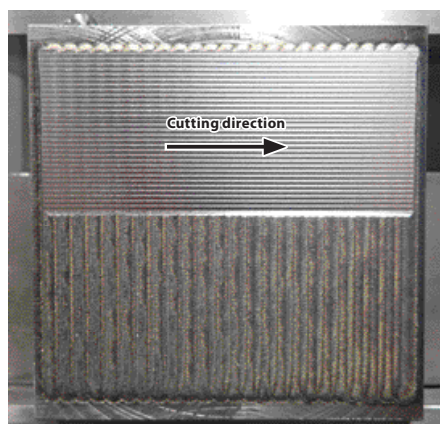

	Wear condition of ball section		Machined Surface
	Flank	Rake Face	
AM-EBT			
Conventional			




# AM-EBT


Milling | Additive manufacturing



Type 1

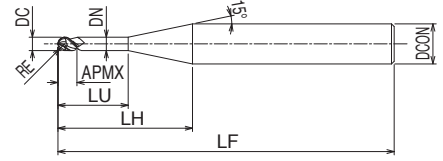


Type 2



- Carbide end mill with Durorey coating
- For challenging applications, removing welding seams
- 3 flutes, ball type

Effective Neck length (Le) depending on Inclined Angle ( $\alpha$ ) of workpiece

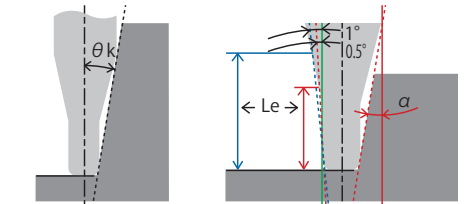

No numerical value means no interference with workpiece.

Material compatibility icons: P (~45 HRC), P (~55 HRC), M (~35 HRC), S (Ti), S (Ni), H (~65 HRC)

Properties icons: CARBIDE, DUOREY, 30°, R ± 0.01, SHRINK FIT

EDP	ZEFP	DC	RE	LU	DN	APMX	LH	DCON	LF	ØK	Effective length by inclined angles (Le)					Type	Price
											0,5°	1°	1,5°	2°	3°		
3187240	3	2	1	4	1,95	2	11,9	6	60	10,32°	4,22	4,44	4,65	4,86	5,26	1	
3187280	3	2	1	8	1,95	2	15,9	6	60	7,62°	8,47	8,87	9,22	9,54	10,24	1	
3187360	3	3	1,5	6	2,85	3	11,8	6	60	8,18°	6,25	6,49	6,72	6,94	7,4	1	
3187392	3	3	1,5	12	2,85	3	17,8	6	60	5,23°	12,53	12,98	13,4	13,85	14,85	1	
3187408	3	4	2	8	3,85	4	12	6	60	5,68°	8,32	8,62	8,91	9,17	9,76	1	
3187416	3	4	2	16	3,85	4	20	6	60	3,18°	16,68	17,23	17,78	18,37	19,71	1	
3187510	3	5	2,5	10	4,85	5	12,1	6	60	2,97°	10,4	10,75	11,08	11,4	-	1	
3187520	3	5	2,5	20	4,85	5	22,1	6	60	1,46°	20,82	21,47	-	-	-	1	
3188060	3	6	3	-	-	9	-	6	60	-	-	-	-	-	-	2	
3188080	3	8	4	-	-	12	-	8	70	-	-	-	-	-	-	2	
3188100	3	10	5	-	-	15	-	10	80	-	-	-	-	-	-	2	
3188120	3	12	6	-	-	18	-	12	90	-	-	-	-	-	-	2	
3188160	3	16	8	-	-	24	-	16	105	-	-	-	-	-	-	2	
3188200	3	20	10	-	-	30	-	20	110	-	-	-	-	-	-	2	

Milling | Additive manufacturing




# CUTTING CONDITIONS

Milling | Cutting conditions

## AM-EBT

Ball type

		Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~65HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)													
Vc		50~70m/min		40~60m/min		20~40m/min		60~80m/min		50~70m/min		40~60m/min		20~40m/min													
R	Lu (mm)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)												
1	4	9.500	940	8.000	790	4.800	480	11.100	1.100	9.500	940	8.000	790	4.800	480												
1	8	4.800	430	4.300	390	2.600	230	5.600	500	4.800	430	4.300	390	2.600	230												
1,5	6	6.400	960	5.300	800	3.200	480	7.400	1.110	6.400	960	5.300	800	3.200	480												
1,5	12	3.800	510	3.300	450	2.000	270	4.400	590	3.800	510	3.300	450	2.000	270												
2	8	4.800	930	4.000	770	2.400	470	5.600	1.080	4.800	930	4.000	770	2.400	470												
2	16	2.900	490	2.500	420	1.500	250	3.400	570	2.900	490	2.500	420	1.500	250												
2,5	10	3.800	910	3.200	770	1.900	460	4.500	1.080	3.800	910	3.200	770	1.900	460												
2,5	20	2.400	550	2.000	430	1.200	280	2.800	600	2.400	520	2.000	430	1.200	280												
3	-	3.200	960	2.700	800	1.600	480	3.700	1.120	3.200	960	2.700	800	1.600	480												
4	-	2.400	860	2.000	720	1.200	430	2.800	1.000	2.400	860	2.000	720	1.200	430												
5	-	1.900	860	1.600	720	960	430	2.200	1.000	1.900	860	1.600	720	960	430												
6	-	1.600	960	1.300	800	800	480	1.900	1.120	1.600	960	1.300	800	800	480												
8	-	1.200	790	1.000	660	600	390	1.400	920	1.200	790	1.000	660	600	390												
10	-	1.000	720	800	600	480	360	1.100	840	1.000	720	800	600	480	360												
Depth of cut		<table border="1"> <thead> <tr> <th colspan="2"></th> <th>ap</th> <th>pf</th> </tr> </thead> <tbody> <tr> <td>Rs6</td> <td>Max:0,15D</td> <td></td> <td>0,05D</td> </tr> <tr> <td>8sR</td> <td>Max:3mm</td> <td></td> <td></td> </tr> </tbody> </table>																ap	pf	Rs6	Max:0,15D		0,05D	8sR	Max:3mm		
		ap	pf																								
Rs6	Max:0,15D		0,05D																								
8sR	Max:3mm																										
<ol style="list-style-type: none"> <li>This tool is recommended for the roughing of additive manufacturing and mold overlay surfaces.</li> <li>Please use machines and holders that are rigid and highly accurate.</li> <li>The values listed above are for reference. Please set the cutting condition in accordance with the actual machining environment.</li> <li>Please reduce the feed rate when the depth of cut is greater than specified.</li> <li>Please adjust the speed, feed and depth of cut accordingly when the overhang length is longer than specified.</li> <li>Please use a suitable fluid with high smoke retardant properties.</li> <li>During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.</li> <li>Please use water-soluble coolant when machining stainless steel, cobalt-chromium based alloy, titanium alloy, and Ni-based alloy.</li> <li>Tool runout should be kept to a minimum for maximum accuracy.</li> <li>When the cutting load fluctuates in areas such as the corners, please reduce the rotational speed.</li> </ol>																											



# KEY FEATURES: AM-CRE

## Stable performance and enhanced efficiency with multi-flute configuration

- 1 Three-dimensional negative geometry that achieves both rigidity and sharpness
  - Corner configuration that enables milling of hard additive manufacturing parts
  - Corresponds to fluctuations in cutting allowance

- 2 Flute specification that allows regrinding

- 3 Multi-flute specification that achieves long tool life and high efficiency

Outer diameter under  
Ø10  
6-flute specification



Outer diameter  
Ø12 or above  
8-flute specification




- 4 DUREY coating optimized for high-hardness steel machining



# CUTTING DATA

## Milling example in Stellite Alloys

Tool	AM-CRE Ø8XR2 (6FL)
Work Material	Stellite (48HRC)
Milling Method	Contour Line Operation
Cutting Speed	50 m/min (2.000 min <sup>-1</sup> )
Feed	600 mm/min (0,05 mm/t)
Depth of Cut	ap=0,5 mm ae=0,5 mm
Coolant	Air Blow
Machine	Vertical Machining Center


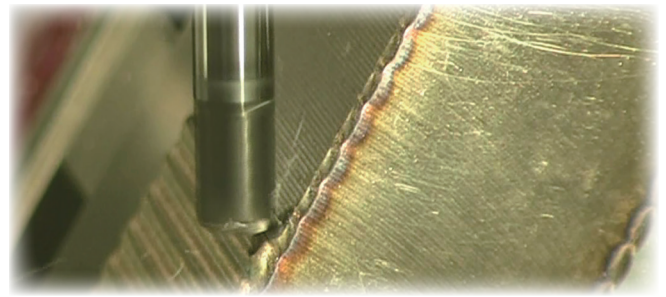


AM-CRE • After milling 190 m

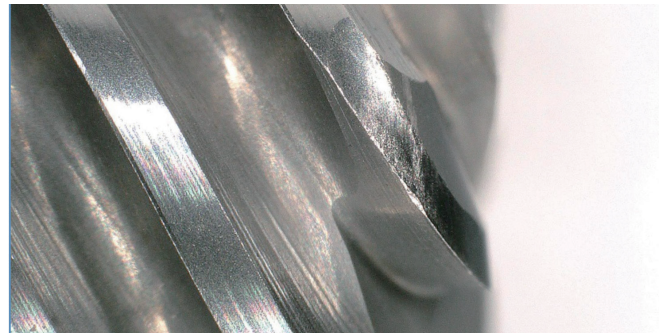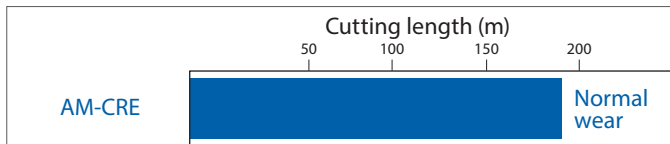

## Machining example with precipitation hardening stainless steel additive material

Tool	AM-CRE Ø8XR2 (6FL)
Work Material	SUS630 (45 HRC)
Milling Method	Contour Line Operation
Cutting Speed	63 m/min (2.500 min <sup>-1</sup> )
Feed	869 mm/min (0,058 mm/t)
Depth of Cut	ap=0,1 mm ae=1,0 mm
Coolant	Water Soluble
Machine	Five-axis Machining Center (BT50)

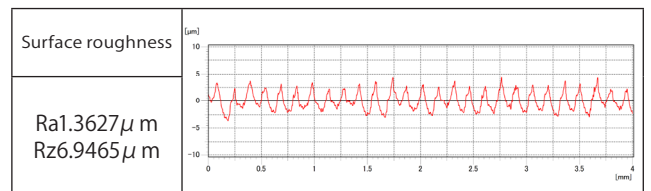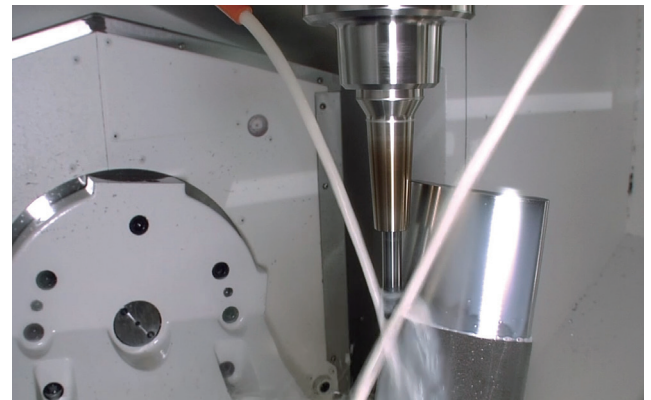


Milling | Additive manufacturing

## End mills for additive manufacturing are also suitable for milling built-up welding parts of molds

Overlay welding is a method for partially modifying a mold.

Built-up weld has high-hardness and high fluctuation in cutting allowance, making machining extremely difficult.

End mills for additive manufacturing can also be used for built-up welding parts due to their tough cutting edge geometry.

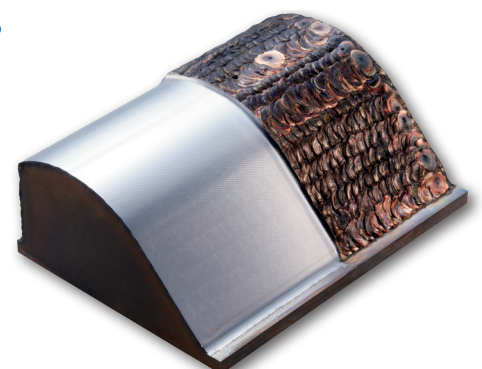



# CUTTING CONDITIONS

Milling | Cutting conditions

## AM-CRE

Radius type

DC x RE	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~60HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)	
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)
Vc	50~70m/min		40~60m/min		20~40m/min		60~80m/min		50~70m/min		40~60m/min		20~40m/min	
6xR1	3.700	1.330	3.200	1.150	1.910	690	4.240	1.530	3.700	1.330	3.200	1.150	1.910	690
6xR1.5	3.200	960	2.700	800	1.600	480	3.700	1.120	3.200	960	2.700	800	1.600	480
8xR1	2.780	1.250	2.400	1.080	1.430	640	3.180	1.430	2.780	1.250	2.400	1.080	1.430	640
8xR2	2.400	720	2.000	600	1.200	360	2.800	840	2.400	720	2.000	600	1.200	360
10xR1	2.220	1.600	1.900	1.370	1.150	830	2.540	1.830	2.220	1.600	1.900	1.370	1.150	830
10xR2	1.900	920	1.600	760	960	460	2.200	1.070	1.900	920	1.600	760	960	460
12xR1	1.850	2.220	1.600	1.920	960	1.150	2.120	2.540	1.850	2.220	1.600	1.920	960	1.150
12xR2	1.600	1.270	1.300	1.060	800	640	1.900	1.490	1.600	1.270	1.300	1.060	800	640
16xR1	1.380	2.430	1.200	2.110	720	1.270	1.590	2.800	1.380	2.430	1.200	2.110	720	1.270
16xR3	1.200	1.430	1.000	1.190	600	720	1.400	1.670	1.200	1.430	1.000	1.190	600	720
20xR1	1.110	2.490	1.000	2.240	570	1.280	1.270	2.840	1.110	2.490	1.000	2.240	570	1.280
20xR3	1.000	1.530	800	1.270	480	760	1.100	1.780	1.000	1.530	800	1.270	480	760

Depth of cut	<b>ae</b>	<b>ap</b>
	Max:0,5xD	Max:0,2xR

1. This tool is recommended for the roughing of additive manufacturing and mold overlay surfaces.
2. Please use machines and holders that are rigid and highly accurate.
3. The values listed above are for reference. Please set the cutting condition in accordance with the actual machining environment.
4. Please reduce the feed rate when the depth of cut is greater than specified.
5. Please adjust the speed, feed and depth of cut accordingly when the overhang length is longer than specified.
6. Please use a suitable fluid with high smoke retardant properties.
7. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
8. Please use water-soluble coolant when machining stainless steel, cobalt-chromium based alloy, titanium alloy, and Ni-based alloy.
9. Tool runout should be kept to a minimum for maximum accuracy.
10. When the cutting load fluctuates in areas such as the corners, please reduce the rotational speed.



# KEY FEATURES: AM-HFC / PXHF-AM


**High Feed Radius Type enables high feed milling of high-hardness additive manufacturing parts.**

AM-HFC

PXHF-AM

1 Composite radius cutting edge optimized for flat surface milling

● A robust cutting edge that can withstand shapes with unstable depth of cut



Large arc

Corner R

2 Flat cutting edge


● Suppresses chipping of the end cutting edge

● Achieves good machined surface quality



3 Specification with coolant hole

## Mold surface by additive manufacturing

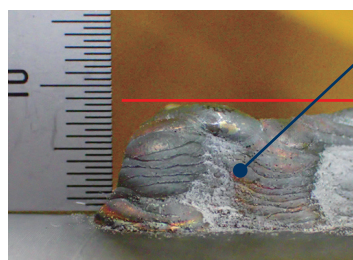

Deposited additive material  
Large fluctuations in the part to be removed by cutting (cutting allowance)


- Cutting edge specification that minimizes chipping even if the amount of cut suddenly increases
- Reduction of machining time

# HIGH EFFICIENCY MACHINING

## Composite radius cutting edge

Since the depth of cut is small, cutting resistance in the feed direction is reduced, suppressing tool vibration and deflection.


By reducing the chip thickness, cutting heat is easily transferred to the chip, making it more difficult for heat to remain on the tool cutting edge and work material.

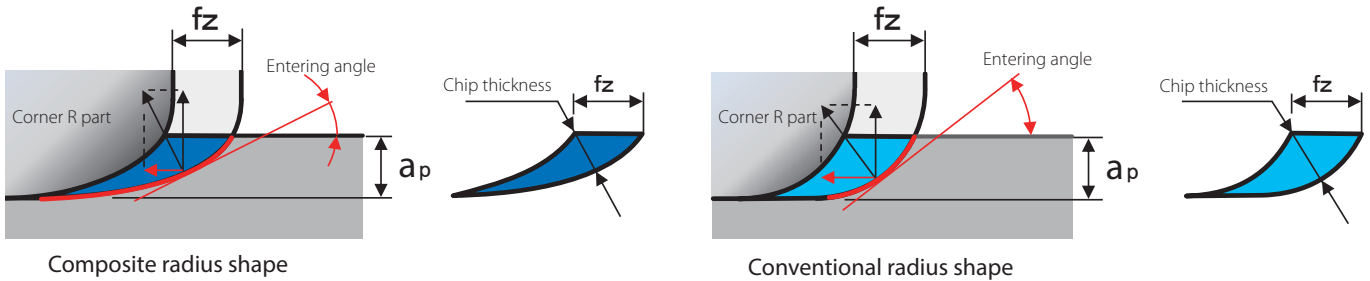

## Good machined surface

Wiper edge enables good machined surface

<b>Tool</b>	AM-HFC Ø4XR0,5	Competitor 6FL	Competitor 4FL
<b>Work Material</b>	SKD61 (50HRC) Additive Material		
<b>Milling Method</b>	Frontal Milling		
<b>Cutting Speed</b>	60 m/min (4.775 min <sup>-1</sup> )		
<b>Feed</b>	4.300 mm/min		
	0,15 mm/t	0,225 mm/t	
<b>Depth of Cut</b>	ap= 0,16 mm ae= 2 mm		
<b>Coolant</b>	Air Blow		
<b>Machine</b>	Vertical Machining Center (BT40)		

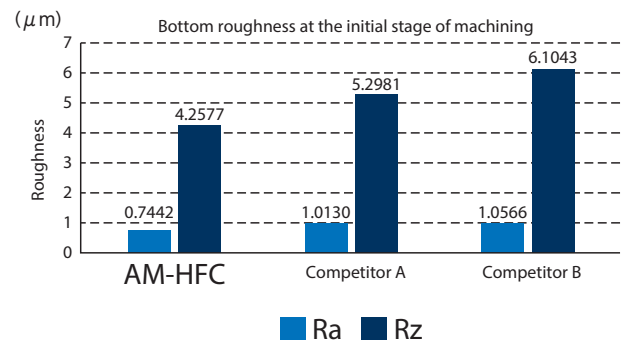

## Good chip evacuation


Specification with coolant hole improves chip evacuation and prevents chips from getting tangled  
 DUROREY coating optimized for high-hardness steel machining



# CUTTING DATA





## Stable machining with no chipping on both the end cutting edge and outer peripheral cutting edge

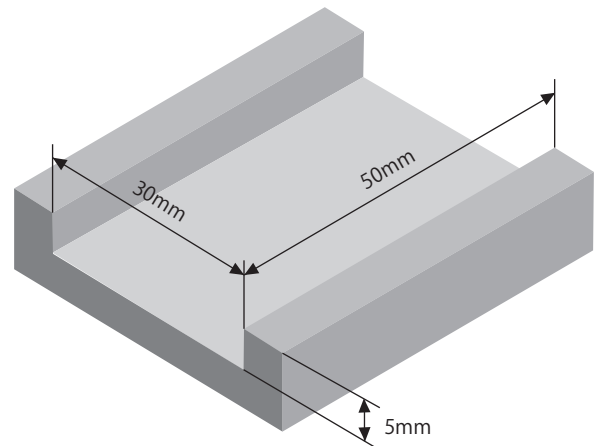Tool	AM-HFC Ø10XR1,2	
Work Material	S600 (SKH51) 65HRC	
Milling Method	Frontal Milling	Trochoidal Milling
Cutting Speed	100 m/min (3.200 min <sup>-1</sup> )	
Feed	1.536 mm/min (0,08 mm/t)	900 mm/min (0,046 mm/t)
Depth of Cut	ap= 0,1 mm ae= 4 mm	ap= 5 mm ae= 0,2 mm
Coolant	Air Blow	
Machine	Vertical Machining Center (BT40)	





Shape of work material

## Worn state after frontal milling 3 slots and trochoidal milling 2 slots

End cutting edge		Peripheral cutting edge	
AM-HFC	Competitor	AM-HFC	Competitor
			

The AM-HFC exhibits no chipping on the end cutting edge and outer peripheral cutting edge, and can continued to be used.


## Condition of the bottom surface machined by AM-HFC

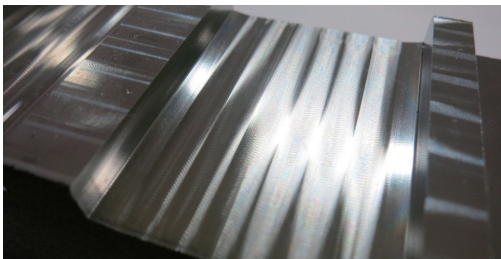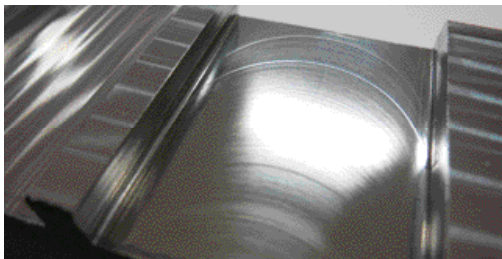Frontal milling	Trochoidal milling
	




## Machining example in SKH51 (65 HRC)

<b>Tool</b>	Head: PXHF-AM160C16-06R200-O Holder: PXMZ-C16SS16-S100-O		A,B Competitor
<b>Size</b>	Ø16 6FL		φ16 4FL
<b>Work Material</b>	SKH51 (65HRC)		
<b>Milling Method</b>	Frontal Milling		
<b>Cutting Speed</b>	60 m/min (1.200 min <sup>-1</sup> )		
<b>Feed</b>	1.440 mm/min (0,2 mm/t)	1.440 mm/min (0,3 mm/t)	
<b>Depth of Cut</b>	ap= 0,3 mm ae= 8 mm		
<b>Coolant</b>	Air Blow		
<b>Machine</b>	Vertical Machining Center (BT40)		

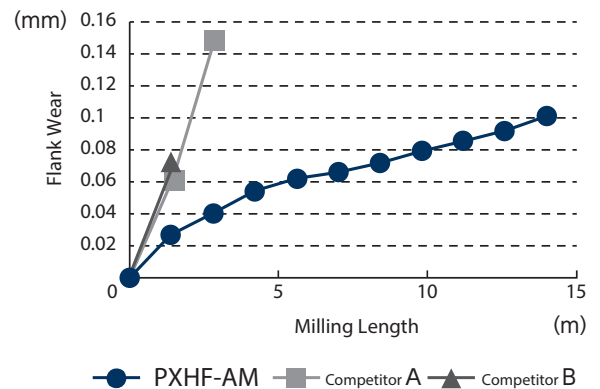

## Worn state of corner R

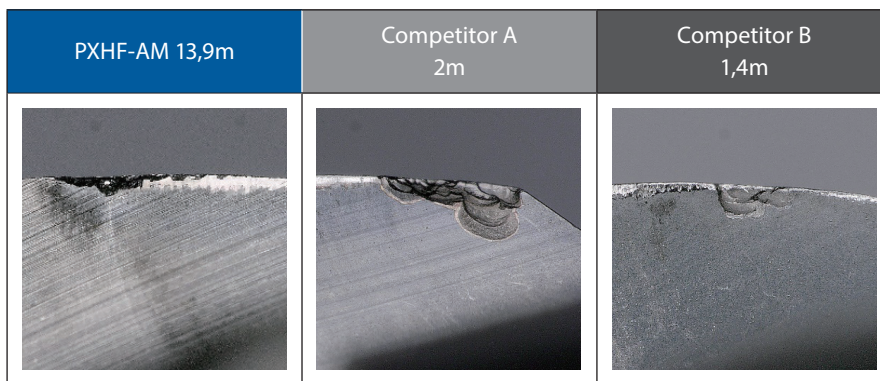

Four times the durability was achieved versus the competitor products in the machining of SKH51 (65 HRC).

## Machining example in Inconel 718 (additive material)

<b>Tool</b>	AM-HFC Ø10XR1,2
<b>Work Material</b>	Inconel 718 (Additive Material)
<b>Milling Method</b>	Frontal Milling
<b>Cutting Speed</b>	50 m/min (1.592 min <sup>-1</sup> )
<b>Feed</b>	478 mm/min (0,05 mm/t)
<b>Depth of Cut</b>	ap= 0,5 mm ae= 2 mm
<b>Coolant</b>	Air Blow
<b>Machine</b>	Five-axis Maching Center



The machining of up to 8 workpieces (total cutting amount: 188,8 cm<sup>3</sup> and more) in Inconel 718 (additive material) was made possible.




# AM-HFC NEW

Milling | Additive manufacturing




Type 1




6 flutes

Type 2


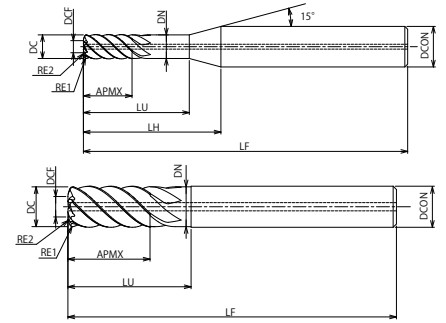


Effective Neck length (Le) depending on Inclined Angle ( $\alpha$ ) of workpiece

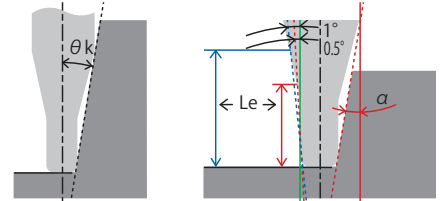

No numerical value means no interference with workpiece.

- Carbide end mill with Durorey coating
- End Mills for Additive Manufacturing
- 6 flutes, High Feed Radius Type
- With oil hole

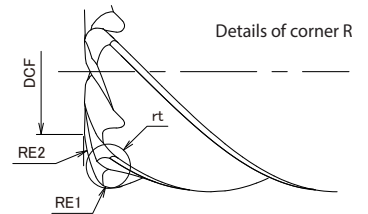

EDP	DC	rt	DCF	RE1	RE2	ZEPF	DCON	APMX	LH	DN	LF	LU	ØK	Effective length by inclined angles (Le)					Type	Price
														0,5°	1°	1,5°	2°	3°		
3188204	4	0,5	2	0,4	2,5	6	6	8	15,9	3,8	50	12	3,73°	12,53	12,98	13,43	13,91	15	1	
3188205	5	0,6	2,5	0,5	3	6	6	10	17	4,8	60	15	1,76°	15,64	16,18	16,74	-	-	1	
3188206	6	0,8	3	0,6	3,5	6	6	12	-	5,8	60	18	-	-	-	-	-	-	2	
3188208	8	1	4	0,8	5	6	8	16	-	7,7	70	24	-	-	-	-	-	-	2	
3188210	10	1,2	5	1	6	6	10	20	-	9,7	80	30	-	-	-	-	-	-	2	
3188212	12	1,5	6	1,2	7	6	12	24	-	11,7	90	36	-	-	-	-	-	-	2	

Milling | Additive manufacturing




# CUTTING CONDITIONS

Milling | Cutting conditions

## AM-HFC

High Feed Radius type Maximum Ramping Angle (E°)


DC x rt	Ramping Angle E°	Helical Milling (mm)		Helical Angle P°
		D0 Min.	D0 Max.	
4xR0,5	3°	6	7	1,5°
5xR0,6	3°	7,5	9	1,5°
6xR0,8	3°	9	11	1,5°
8xR1	3°	12	15	1,5°
10xR1,2	3°	15	19	1,5°
12xR1,5	3°	18	23	1,5°

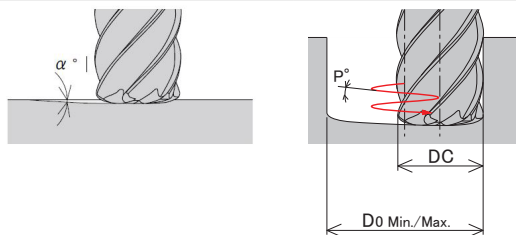

### Edge shape definitions for the purpose of creating a program

DC	rt	Remainder Z
4	R0,5	0,11
5	R0,6	0,15
6	R0,8	0,17
8	R1	0,22
10	R1,2	0,31
12	R1,5	0,36

During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.

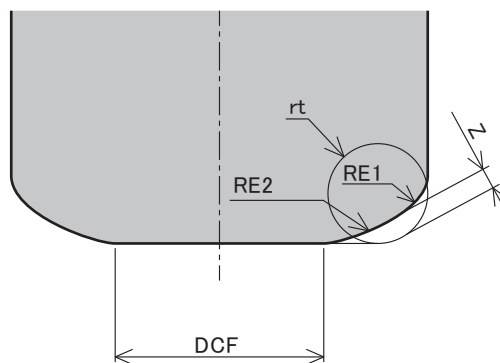

# CUTTING CONDITIONS

Milling | Cutting conditions

## AM-HFC

High Feed Radius type

Frontal Milling

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)					
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)				
90~110m/min	70~90m/min		50~70m/min		100~120m/min		90~110m/min		70~90m/min		30~50m/min							
DC x rt																		
4 × R0,5	7.960	5.730	6.370	4.590	4.780	1.720	8.760	6.310	7.960	5.730	6.370	4.590	3.180	760				
5 × R0,6	6.370	5.730	5.100	4.590	3.820	1.720	7.010	6.310	6.370	5.730	5.100	4.590	2.550	770				
6 × R0,8	5.310	5.730	4.250	4.590	3.180	1.720	5.840	6.310	5.310	5.730	4.250	4.590	2.120	760				
8 × R1	3.980	5.730	3.180	4.580	2.390	1.720	4.380	6.310	3.980	5.730	3.180	4.580	1.590	760				
10 × R1,2	3.180	5.720	2.550	4.590	1.910	1.720	3.500	6.300	3.180	5.720	2.550	4.590	1.270	760				
12 × R1,5	2.650	5.720	2.120	4.580	1.590	1.720	2.920	6.310	2.650	5.720	2.120	4.580	1.060	760				
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,5D</td> <td>Max: 0,04D</td> </tr> </table> <p>If the pick amount is 0.5 x D or more, cusp may occur on the machined surface.</p>														ae	ap	Max: 0,5D	Max: 0,04D
ae	ap																	
Max: 0,5D	Max: 0,04D																	
During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.																		

## AM-HFC

High Feed Radius type

Side Milling

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)																					
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)																				
80~100m/min	50~70m/min		30~50m/min		90~110m/min		80~100m/min		50~70m/min		20~40m/min																							
DC x rt																																		
4 × R0,5	7.170	1.200	4.780	570	3.180	230	7.960	1.340	7.170	1.200	4.780	570	2.390	230																				
5 × R0,6	5.730	1.200	3.820	570	2.550	230	6.370	1.340	5.730	1.200	3.820	570	1.910	230																				
6 × R0,8	4.780	1.200	3.180	570	2.120	230	5.310	1.340	4.780	1.200	3.180	570	1.590	230																				
8 × R1	3.580	1.720	2.390	800	1.590	380	3.980	1.910	3.580	1.720	2.390	800	1.190	230																				
10 × R1,2	2.870	1.720	1.910	800	1.270	380	3.180	1.910	2.870	1.720	1.910	800	960	230																				
12 × R1,5	2.390	1.720	1.590	800	1.060	380	2.650	1.910	2.390	1.720	1.590	800	800	230																				
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,05D</td> <td>Max: 1,5D</td> </tr> </table>		ae	ap	Max: 0,05D	Max: 1,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,02D</td> <td>Max: 1,5D</td> </tr> </table>		ae	ap	Max: 0,02D	Max: 1,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,02D</td> <td>Max: 1D</td> </tr> </table>		ae	ap	Max: 0,02D	Max: 1D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,05D</td> <td>Max: 1,5D</td> </tr> </table>		ae	ap	Max: 0,05D	Max: 1,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,02D</td> <td>Max: 1,5D</td> </tr> </table>		ae	ap	Max: 0,02D	Max: 1,5D				
ae	ap																																	
Max: 0,05D	Max: 1,5D																																	
ae	ap																																	
Max: 0,02D	Max: 1,5D																																	
ae	ap																																	
Max: 0,02D	Max: 1D																																	
ae	ap																																	
Max: 0,05D	Max: 1,5D																																	
ae	ap																																	
Max: 0,02D	Max: 1,5D																																	
<ol style="list-style-type: none"> <li>This tool is recommended for the roughing of additive manufacturing and mold overlay surfaces.</li> <li>Please use machines and holders that are rigid and highly accurate.</li> <li>The values listed above are for reference. Please set the cutting condition in accordance with the actual machining environment.</li> <li>Please reduce the feed rate when the depth of cut is greater than specified.</li> <li>The above table is a guide when the amount of protrusion of the tool is 4 x D or less. If the amount of protrusion is large, chattering is likely to occur, so adjust the rotation speed, feed rate and depth of cut with reference to the coefficients.</li> <li>Please use a suitable fluid with high smoke retardant properties.</li> <li>During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.</li> <li>Please use water-soluble coolant when machining stainless steel, cobalt-chromium alloy, titanium alloy, and Ni-based alloy.</li> <li>Tool runout should be kept to a minimum for maximum accuracy.</li> <li>When the cutting load fluctuates in areas such as the corners, please reduce the rotational speed.</li> </ol>																																		

### Tool extension coefficients

Overhang Length	Cutting Speed	ap	fz
L/D ≤ 4	100%	100%	100%
4 < L/D ≤ 5	90%	75%	80%
5 < L/D ≤ 6	80%	50%	60%




# PXMZ

## Milling | Indexables





- Straight Shank Holder for PXM
- Carbide shank with coolant hole
- Shank & matching spanner sold as set

Type 1

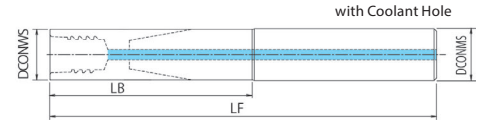

Type 2

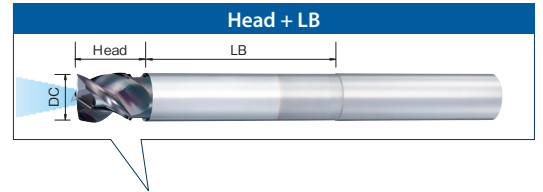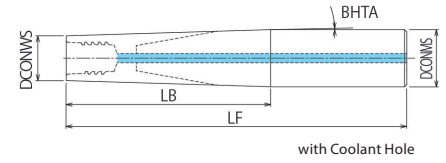

EDP	Designation	DCONWS	DCONMS	BHTA	LF	LB	Head + LB	CS	Type	Price
48309005	PXMZ-C12SS12-S075CS-O	11,7	12	0°	75	25	39,4	C12	1	
48309006	PXMZ-C12SS12-L100CS-O	11,7	12	0°	100	46,3	60,7	C12	1	
48309007	PXMZ-C12SS12-L115CS-O	11,7	12	0°	115	65	79,4	C12	1	
48309008	PXMZ-C12TP16-LL135CS-O	11,7	16	1.3°	135	85	99,4	C12	2	
48309009	PXMZ-C12TP16-LL150CS-O	11,7	16	1°	150	85,6	100	C12	2	
48309010	PXMZ-C16SS16-S090CS-O	15,7	16	0°	90	40	58,7	C16	1	
48309011	PXMZ-C16SS16-L130CS-O	15,7	16	0°	130	62	80,7	C16	1	
48309012	PXMZ-C16SS16-L135CS-O	15,7	16	0°	135	85	103,7	C16	1	
48309013	PXMZ-C16TP20-LL165CS-O	15,7	20	1°	165	115	133,7	C16	2	
48309014	PXMZ-C16TP20-LL180CS-O	15,7	20	1°	180	116,6	135,3	C16	2	
48309015	PXMZ-C20SS20-S090CS-O	19,6	20	0°	90	40	61,5	C20	1	
48309016	PXMZ-C20SS20-L150CS-O	19,6	20	0°	150	79,3	100,8	C20	1	
48309017	PXMZ-C20SS20-L180CS-O	19,6	20	0°	180	110	131,5	C20	1	
48309018	PXMZ-C20TP25-LL200CS-O	19,6	25	1°	200	140	161,5	C20	2	
48309019	PXMZ-C20TP25-LL210CS-O	19,6	25	1°	210	145	166,5	C20	2	

1. For the use of internal coolant, please use the appropriate head and shank holders with oil hole.
2. Adjust the position of the coolant nozzles accordingly so that the chips do not get tangled.




# KEY FEATURES: PXMC COLLET

- 1** Powerful chip evacuation even on small machining center
- 2** The reduction of overhang length improves rigidity and rotational balance
- 3** A wide variety of exchangeable heads
  - Suitable for steel, stainless steel and aluminum
  - Wide processing range from roughing to finishing
- 4** Greater cost performance compared to monoblock type holders, only need to change the collet in case of trouble.

PXMC Collet Extra Short Type

Conventional Combination

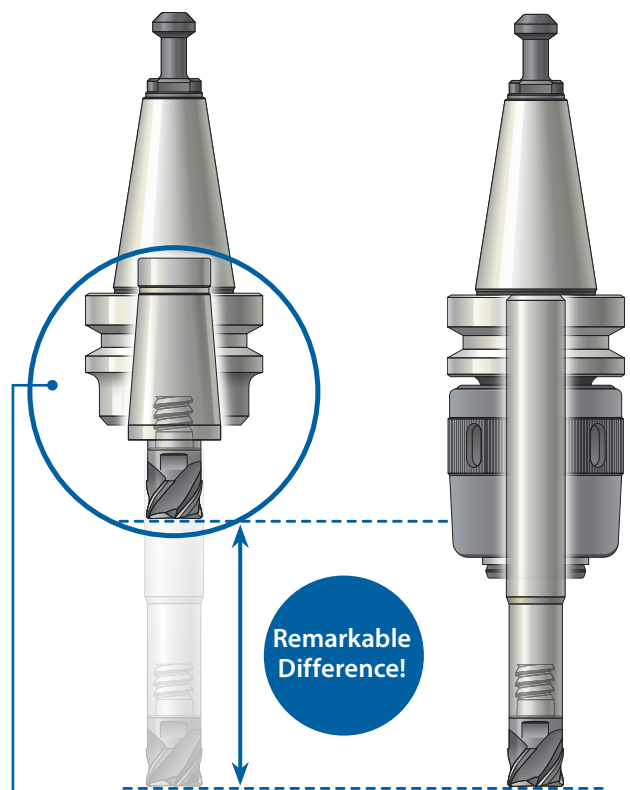


# KEY FEATURES: PXM EXCHANGEABLE HEAD

Milling | Indexables

All the knowledge and know-how acquired by designing solid carbide end mills are found in these exchangeable heads.  
 · Various types are available to meet variety of machining methods.

End Face + Taper = Double Face Clamping  
 · High rigidity and accuracy of tightening  
 · High precision of run out  $\leq 0,015\text{mm}$   
 · High head replacing accuracy =  $\pm 0.03\text{mm}$

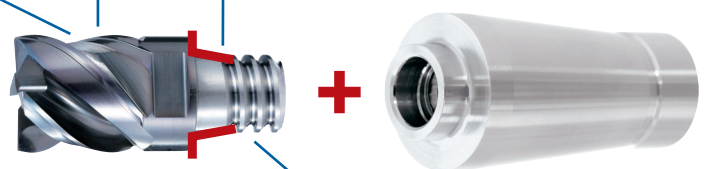

Applying buttress screw makes easy and reduces time to desorb heads







# CUTTING CONDITIONS

Milling | Cutting conditions

## PXHF-AM

For both PXMZ straight shank holder / PXMC collet

Maximum Ramping Angle (E°)


Designation	Ramping Angle E°	Helical Milling (mm)		Helical Angle p°
		D0 Min.	D0 Max.	
PXHF-AM120C12-06R150-O	3°	18	23	1,5°
PXHF-AM160C16-06R200-O	3°	24	31	1,5°
PXHF-AM200C20-06R250-O	3°	30	39	1,5°



### Edge shape definitions for the purpose of creating a program

Designation	R rt	Remainder Z
PXHF-AM120C12-06R150-O	R1,5	0,36
PXHF-AM160C16-06R200-O	R2	0,47
PXHF-AM200C20-06R250-O	R2,5	0,59

During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.

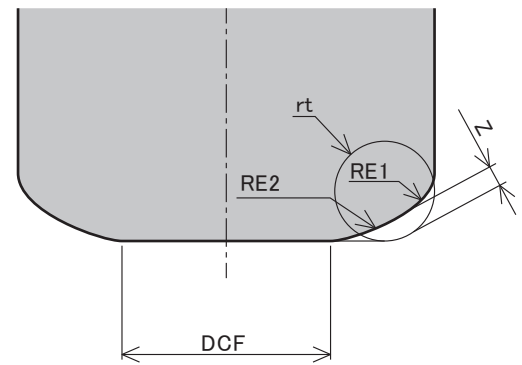

## TIGHTENING PROCEDURE

**1. Cleaning**  
Remove dirt and chips from the connecting thread and shank.

**2. Initial Tightening**  
Tighten by hand

**3. Final Tightening**  
Tighten with a spanner wrench

**4. Confirmation**  
Confirm that there is no gap

**Cautions during use**

- Only use the spanner wrenches that are designed specifically for the PXM (P. 13). Please do not use alternative spanner wrenches sold on the market as a replacement.
- Please tighten until the head and the shank holder faces meet. Confirm that there is no gap.
- Degreasing the connecting thread may result in over tightening or a possible separation of the faces. Please do not degrease.
- Please make sure that the spanner wrench is inserted properly and turn it slowly during use.



# CUTTING CONDITIONS

Milling | Cutting conditions

## PXHF-AM

For both PXMZ straight shank holder / PXMC collet  
Frontal Milling  $L/D \leq 4$

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)					
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)				
12	3.180	5.270	2.650	4.390	1.990	1.580	3.580	5.930	3.180	5.270	2.650	4.390	1.060	760				
16	2.390	5.280	1.990	4.390	1.490	1.570	2.690	5.940	2.390	5.280	1.990	4.390	800	770				
20	1.910	5.270	1.590	4.390	1.190	1.570	2.150	5.930	1.910	5.270	1.590	4.390	640	770				
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,5D</td> <td>Max: 0,04D</td> </tr> </table>														ae	ap	Max: 0,5D	Max: 0,04D
ae	ap																	
Max: 0,5D	Max: 0,04D																	

During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.

### Frontal Milling $4 < L/D \leq 5$

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)					
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)				
12	2.920	3.780	2.390	3.100	1.860	1.210	3.320	4.300	2.920	3.780	2.390	3.100	930	540				
16	2.190	3.780	1.790	3.090	1.390	1.200	2.490	4.300	2.190	3.780	1.790	3.090	700	540				
20	1.750	3.780	1.430	3.090	1.110	1.200	1.990	4.300	1.750	3.780	1.430	3.090	560	540				
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,5D</td> <td>Max: 0,03D</td> </tr> </table>														ae	ap	Max: 0,5D	Max: 0,03D
ae	ap																	
Max: 0,5D	Max: 0,03D																	

### Frontal Milling $5 < L/D \leq 6$

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)					
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)				
12	2.650	2.670	2.120	2.140	1.590	800	2.920	2.940	2.650	2.670	2.120	2.140	800	350				
16	1.990	2.670	1.590	2.140	1.190	800	2.190	2.940	1.990	2.670	1.590	2.140	600	350				
20	1.590	2.670	1.270	2.130	960	810	1.750	2.940	1.590	2.670	1.270	2.130	480	350				
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,5D</td> <td>Max: 0,02D</td> </tr> </table>														ae	ap	Max: 0,5D	Max: 0,02D
ae	ap																	
Max: 0,5D	Max: 0,02D																	

## PXHF-AM


Side Milling

Vc	Prehardened Steel • Hardened Steel ~45HRC		Hardened Steel ~62HRC		Hardened Steel ~70HRC		Stainless Steel ≤200HB		Cobalt Chromium Based Alloy (Stellite)		Titanium Alloy		Ni based Alloy (Inconel 718)											
	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)	S (min <sup>-1</sup> )	F (mm/min)										
12	2.390	1.200	1.590	570	1.060	230	2.650	1.340	2.390	1.200	1.590	570	800	230										
16	1.790	1.200	1.190	570	800	230	1.990	1.340	1.790	1.200	1.190	570	600	230										
20	1.430	1.200	960	580	640	230	1.590	1.340	1.430	1.200	960	580	480	230										
Depth of cut	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,05D</td> <td>Max: 0,5D</td> </tr> </table>		ae	ap	Max: 0,05D	Max: 0,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,02D</td> <td>Max: 0,5D</td> </tr> </table>		ae	ap	Max: 0,02D	Max: 0,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,05D</td> <td>Max: 0,5D</td> </tr> </table>		ae	ap	Max: 0,05D	Max: 0,5D	<table border="1"> <tr> <td>ae</td> <td>ap</td> </tr> <tr> <td>Max: 0,02D</td> <td>Max: 0,5D</td> </tr> </table>		ae	ap	Max: 0,02D	Max: 0,5D
ae	ap																							
Max: 0,05D	Max: 0,5D																							
ae	ap																							
Max: 0,02D	Max: 0,5D																							
ae	ap																							
Max: 0,05D	Max: 0,5D																							
ae	ap																							
Max: 0,02D	Max: 0,5D																							

- This tool is recommended for the roughing of additive manufacturing and mold overlay surfaces.
- Please use machines and holders that are rigid and highly accurate.
- The values listed above are for reference. Please set the cutting condition in accordance with the actual machining environment.
- Please reduce the feed rate when the depth of cut is greater than specified.
- Please adjust the cutting condition when the overhang length is longer.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble coolant when machining stainless steel, cobalt-chromium alloy, titanium alloy, and Ni-based alloy.
- Tool runout should be kept to a minimum for maximum accuracy.
- When the cutting load fluctuates in areas such as the corners, please reduce the rotational speed.
- If the pick amount is  $0.5 \times D$  or more, cusp may occur on the machined surface.

During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.

# MOUNTING PROCEDURE

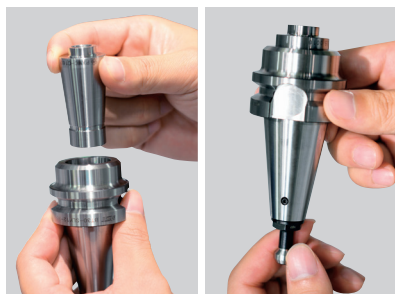

## 1. Initial Tightening (BT30)

Make sure the fastening portion of the collet is clean then insert it into the holder. Turn the pull stud to tighten.

\*For models other than BT30 please refer to the instructions below.



## 2. Final Tightening

Tighten with a spanner wrench



## 3. Cleaning

Remove dirt and chips from the connecting thread and collet



## 4. Mounting the Head

After screwing the head in by hand, use the PXM spanner wrench to tighten.

**Mounting procedure for holders other than BT30**

- ① Insert the hexagon socket wrench into the pull screw hexagonal section.  
\*For pull studs with holes (φ6 or above), it is operational with the stud being attached.
- ② To prevent the collet from rotating, support the tip of the collet by hand, tighten with the wrench by turning to the right, then fastening to the required torque.  
\*Recommended tightening torque: 18N·m

### Cautions during use

- Only use the spanner wrenches that are designed specifically for the PXM (p.24) for attaching PXM heads .
- Please do not use alternative spanner wrenches sold on the market as a replacement.
- Please refer to p.24 for tightening torque.
- Please tighten until the head and the collet faces meet. Confirm that there is no gap.
- Degreasing the connecting thread may result in over tightening or a possible separation of the faces. Please do not degrease.
- Please make sure that the spanner wrench is inserted properly and turn it slowly during use.

## Abundant exchangeable milling heads! Exchangeable head end mill PXM

The PXM is an exchangeable head end mill series with the same high performance of a solid tool and the cost efficiency of an indexable tool. A single exchangeable head body is able to accommodate a wide range of exchangeable heads to meet various application needs.

### Available shapes

- Square Type
- Roughing Type
- Corner Radius Type
- Ball Type

Please see OSG PHOENIX Catalog for details.



## SWEDEN

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö  
Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

## OSG SCANDINAVIA

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde  
Denmark  
Tel: +45 46 75 65 55  
osg@osg-scandinavia.com

## OSG NETHERLANDS

Bedrijfsweg 5  
3481 MG Harmelen  
The Netherlands  
Tel: +31 348 44 2764  
info@osg-nl.com

## OSG UK

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton  
United Kingdom  
Tel: +44 (0) 1827 720 013  
uk\_sales@osg-uk.com

## OSG EUROPE LOGISTICS

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 07  
info@osgeurope.com

## OSG BELUX

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 11  
info@osg-belgium.com

## OSG IBÉRICA

Bekolarra 4  
E - 01010 Vitoria-Gasteiz  
Spain  
Tel: +34 945 242 400  
osg.iberica@osg-ib.com

## OSG FRANCE

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte  
France  
Tel: +33 1 49 90 10 10  
sales@osg-france.com

## OSG ITALY

Via Ferrero, 65 A/B  
I - 10098 Rivoli  
Italy  
Tel: +39 0117705211  
info@osg-italia.it



# OSG IN EUROPE

## CZECH REPUBLIC, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.  
Slovakia, organizačná zložka  
Račianska 22/A, Bratislava 831 02  
Slovakia  
Tel.: +421 24 32 91 295  
info@osgeurope.com

## OSG POLAND

ul. Spółdzielcza 57  
05-074 Halinów  
Polska  
Tel: +22 760 82 71  
Mob. +48 570 677 711  
osg@osg-poland.com

## OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)  
051431 Bucuresti  
România  
Tel: +40 21 322 07 47  
info@osgromania.ro

## OSG TURKEY

Rami Kişla Cad.No:56 Eyüp  
Istanbul 34056  
Turkey  
Tel: +90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

## Vischer & Bolli AG

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
Switzerland  
Tel.: +41 44 802 15 15  
info@vb-tools.com

## OSG GERMANY

Karl-Ehmann-Str. 25  
D - 73037 Göppingen  
Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de



shaping your dreams

#### OSG EUROPE LOGISTICS

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 07  
info@osgeurope.com

#### OSG POLAND Sp. z o.o.

Spółdzielcza 57  
05-074 Halinów - Poland  
Tel: +22 760 82 71  
osg@osg-poland.com

#### OSG ROMANIA SRL

25C, Bucuresti-Magurele Street (Sector 5)  
051431 Bucuresti - România  
Tel: +40 21 322 07 47  
info@osgromania.ro

#### OSG BELUX

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 11  
info@osg-belgium.com

#### OSG GERMANY

Karl-Ehmann-Str. 25  
D - 73037 Göppingen - Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de

#### AUSTRIA

Branch office of OSG GERMANY  
Messestraße 11  
A-6850 Dornbirn  
Tel: +49 7161 6064-0  
info@osg-germany.de

#### OSG FRANCE

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte - France  
Tel: +33 1 49 90 10 10  
sales@osg-france.com

#### OSG SCANDINAVIA

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde - Denmark  
Tel: +45 46 75 65 55  
osg@osg-scandinavia.com

#### OSG ITALIA

Via Ferrero, 65 A/B3  
I - 10098 Rivoli - Italy  
Tel: +39 0117705211  
info@osg-italia.it

#### OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen  
Tel: +31 348 44 2764  
info@osg-nl.com

#### SWEDEN

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö - Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

#### Vischer & Bolli AG

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
T +41 44 802 15 15  
info@vb-tools.com

#### OSG UK

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton, United Kingdom.  
Tel: +44 1827 720 013  
uk\_sales@osg-uk.com

#### OSG IBERICA

Bekolarra 4  
E - 01010 Vitoria-Gasteiz - Spain  
Tel: +34 945 242 400  
osg.iberica@osg-ib.com

#### CZECH, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.  
Slovakia organizacna zlozka  
Racianská 22/A, SK-83102 Bratislava  
Slovakia  
Tel. +421 24 32 91 295  
Orders-osgsvk@osgeurope.com

#### OSG TURKEY

Rami Kışla Cad.No:56 Eyüp  
Istanbul 34056 - Turkey  
Tel+90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

**OSG EUROPE LOGISTICS S.A.**

05/2021 - All rights reserved. © OSG Europe 2021.

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

[www.osgeurope.com](http://www.osgeurope.com)

